

COVNA RECRUITS GLOBAL DISTRIBUTORS
| 诚招全球代理商

COVNA®

科威纳 COVNA®

科威纳 COVNA®

ISO9001 CE RoHS SGS FDA EAC

INTERNATIONAL BRAND
TRUSTWORTHY CHOICE

国际品牌 值得信赖

COVNA®

科威纳集团有限公司 COVNA GROUP CO.,LTD.

科威纳工业自动化有限公司 COVNA INDUSTRY AUTOMATION CO.,LTD.
浙江科威纳阀门有限公司 ZHEJIANG COVNA VALVE CO.,LTD.

中国科威纳总部
COVNA HEADQUARTERS

中国·广东省东莞市东城区汉塘街26号3栋101室
Room 101, Building 3, NO. 26, Hantang Street, Dongcheng Street,
Dongguan City, Guangdong Province, China

邮箱(E-mail): Bond@covna-china.com


Tel 86-0769-2245 6666
www.covnavalves.com



品牌官网



BRAND WEBSITE

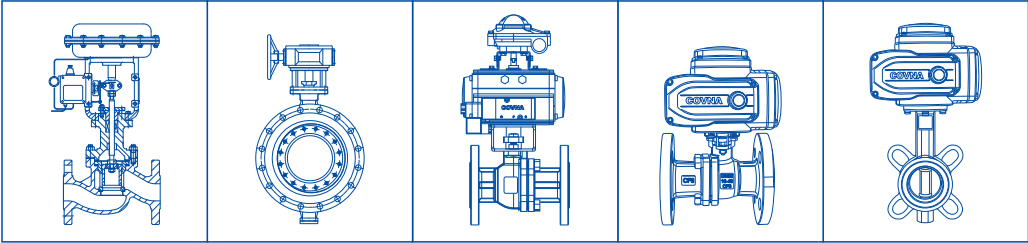

SALUTE TO EVERY ENGINEER

向每个工程人致敬！



INTERNATIONAL BRAND TRUSTWORTHY CHOICE

科威纳 全球信赖品牌

TIER 1 SUPPLIER TO
FORTUNE 500
COMPANY

世界五百强
供应商



EXPORTING TO
OVER 120 COUNTRIES
WORLDWIDE

出口全球120
多个国家



MORE THAN 40 CORE
INVENTION & DESIGN
PATENTS

40多项核心
发明及设计专利



BOASTING A TEAM OF
OVER 30 SENIOR
ENGINEERS

拥有30多名
资深工程师团队



RECOGNIZED AS A
HIGH-TECH ENTERPRISE
SSDI ENTERPRISE

荣获高新技术企业
专精特新企业





CONTENS VNA

CHOOSE COVNA
CHOOSE SAFETY

选择科威纳就是选择安全

COVNA

01-08

企业简介
尊贵客户
精英团队
企业资质

About us
Customer
Elite team
Certificate

09-20

智能锻造车间
智能生产车间
生产控制
装配现场
实验检测

Intelligent forging workshop
Intelligent workshop
Production control
Assembly site
Laboratory testing

21-102

电动阀门系列
气动阀门系列
调节阀系列
电磁阀系列
通用阀门系列
刀闸阀系列
冶金阀门类
衬里阀门系列
丝扣阀门系列
给排水阀门系列
卫生级阀门系列
配件系列

Electric valve series
Pneumatic valve series
Control valve series
Solenoid valve series
Industrial valve series
Knife gate valve series
Metallurgical valve series
Lined valve series
Threaded valve series
Water valve series
Sanitary valve series
Accessory series

ABOUT US

企业简介



DONGGUAN FACTORY

东莞工厂



WENZHOU FACTORY

温州工厂

COVNA科威纳集团有限公司。总部位于美国科罗拉多州丹佛市，是一家集研发、设计、销售、服务于一体，专业生产自动化控制的调节阀、气动阀、电动阀、电磁阀等流通控制及自动化设备配件，COVNA科威纳作为世界工业提供服务的主要供应商之一，拥有许多赫赫有名的企业和闻名遐迩的品牌。

全球技术和客户服务是COVNA科威纳公司的重要组成部分。COVNA科威纳独立拥有技术研发中心，在同行业中率先通过TS(压力管道元件制造许可证)、防爆电气生产许可证、CE(欧盟安全标识)、TÜV(德国莱茵认证)、SGS(国际公认的检验、鉴定、测试和认证机构)等质量管理体系和特种行业要求的认证体系，并通过有40+项核心发明、设计专利，其自动化解决方案满足全球质量标准。

COVNA科威纳集团有限公司为了更快捷高效的管理和服务亚太地区包括中国市场的用户，中美双方投资组建成立的合资公司。多年来，科威纳作为“高新技术及专精特新企业”，以过硬的产品质量，强大的品牌效应和自主自强的创新精神备受认可，先后获得了“中国自主创新产品”、“中国工程建设推荐品牌”“广东知名品牌”、“重点推广品牌”等荣誉。目前，科威纳产品远销100多个国家与地区，广泛应用于自动化、环保、水处理、石油、天然气、化工、电力、冶金、船舶、采矿、造纸、医药、工业系统等十几个行业及领域。

通过值得信赖的品牌组合，COVNA科威纳提供的流体管理解决方案套件，为世界各地的社区提供重要的基础设施。与客户合作，COVNA科威纳帮助他们维持自动化安全运转，最大限度地提供运作效率，提高产品使用性能，与客户共同创造更加可持续发展的人类未来。

COVNA Group LTD. Headquartered in Denver, Colorado, USA, is a research and development, design, sales, service in one, specializing in the production of automatic control control valve, pneumatic valve, electric valve, solenoid valve and other flow control and automation equipment accessories, COVNA as one of the world's major industrial service providers, with many well-known enterprises and well-known brands. At present, COVNA products are exported to more than 100 countries and regions, widely used in automation, environmental protection, water treatment, oil, natural gas, chemical, electric power, metallurgy, shipbuilding, mining, paper, medicine, industrial systems and other more than a dozen industries and fields.

Global technology and customer service are an integral part of COVNA. COVNA has independent technology research and development center, and takes the lead in the industry through TS (pressure pipe components manufacturing license), explosion-proof electrical production license, CE (EU safety mark), TUV (German Rheinland certification), SGS

(internationally recognized inspection, identification, testing and certification bodies) and other quality systems and certification systems required by special industries. With more than 40 core inventions and design patents, its automation solutions meet global quality standards.

Through a portfolio of trusted brands, COVNA offers a suite of fluid management solutions that provide critical infrastructure to communities around the world. Working with customers, COVNA helps them maintain automated and safe operations, maximize operational efficiency, improve product performance, and work with customers to create a more sustainable human future.

科威納 COVNA®

CUSTOMER

o 尊贵客户

Build a global online and offline service system, and provide rapid selection, technical consultation and remote support through digital platforms, making efficient services within easy reach.

构建全球化线上线下服务体系,通过数字平台提供快速选型、技术咨询与远程支持,让高效服务触手可及。



排名不分先后 更多整理中.....



Every user's witness is a great inspiration to us

用户的每一次见证,都是对我们莫大的鼓舞



ELITE TEAM

○ 精英团队



汇聚工程师的智慧、匠人的坚守与梦想家的远见。我们以协作为纽带，在流程之中凝聚磅礴力量。
因为专业，所以信赖；因为热爱，所以卓越。

Gathering the wisdom of engineers, the perseverance of artisans and the vision of dreamers.
We are connected by collaboration, and in the process, we gather tremendous strength.
Because of professionalism, we are trusted; because of passion, we are outstanding.



30⁺

拥有30多名资深工程师团队
Backed by a Team of
Over 30 Senior Engineers

40⁺

核心发明及设计专利
Multiple core invention and
design patents



CERTIFICATE

企业资质



2017

年荣获高新技术企业
Recognized as a National
High-tech Enterprise in 2017

在科威纳的成长历程中，每一次技术突破与客户认可的背后，都凝聚着团队日夜钻研的智慧结晶。从生产车间的精益求精，到研发实验室的反复验证；从销售团队的客户走访，到售后服务的细致跟进，我们用专业与汗水浇筑品质。正是这份执着与协作，让科威纳的阀门在严苛工况中稳定运行，让每一份功勋奖章都闪耀着集体奋斗的光芒。未来，我们将继续以匠心致初心，用实干成就更多行业标杆！

In the course of COVNA's growth, behind every technological breakthrough and customer recognition, the wisdom of the team is condensed day and night. From the excellence of the production workshop to the repeated verification of the research and development laboratory; From the customer visits of the sales team to the meticulous follow-up of after-sales service, we cast quality with professionalism and sweat. It is this persistence and collaboration that allows COVNA's valves to operate stably in harsh conditions, and each medal of merit shines with the light of collective struggle. In the future, we will continue to focus on originality and achieve more industry benchmarks with hard work!




INTELLIGENT FORGING WORKSHOP

○ 智能锻造车间



通过COVNA管理系统无缝集成自动化设备,确保生产全流程的高效、透明与品质一致。

The COVNA management system seamlessly integrates automated equipment, ensuring high efficiency, transparency, and consistent quality throughout the entire production process.

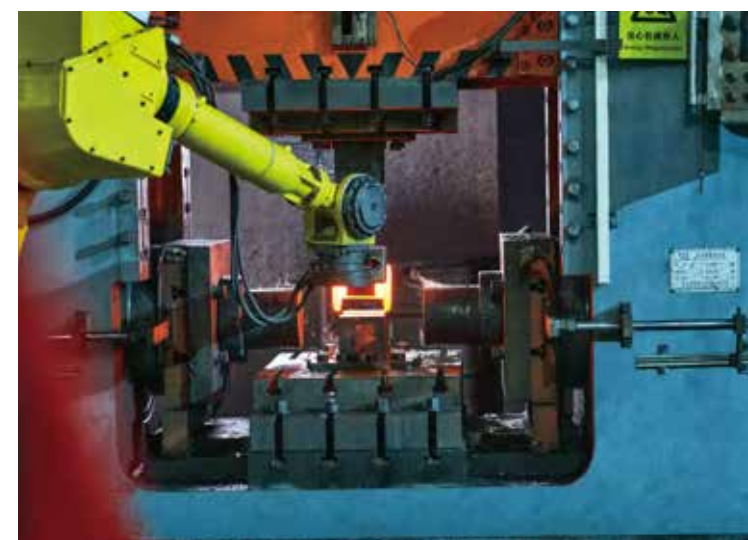

INTELLIGENT WORKSHOP

○ 智能生产车间

When the Industry 4.0 era makes its debut
The wave of digitization is reaching every corner of the world
COVNA is establishing a highly integrated
automated production workshop
Combined with the COVNA management system
independently developed by COVNA
Throughout the entire production process.

COVNA



当工业4.0时代登场，数字化的浪潮正在触达世界的每一个角落，科威纳建立高度集成的自动化生产车间，与科威纳自主开发的COVNA管理系统相结合，贯穿整个生产流程。



PRODUCTION CONTROL

○ 生产控制

引进高端数控机床，实现微米级加工精度。数字化控制系统确保每一件零部件都符合严苛的设计标准。

High-end CNC machine tools are adopted to achieve micron-level machining accuracy.
The digital control system ensures that every component meets stringent design standards.




PRODUCTION CONTROL

○ 生产控制



方寸之间见真章, 毫厘之差定乾坤。
拒绝瑕疵, 不做差不多先生。
把每一道工序都当作艺术品雕琢, 以极致匠心, 守护流体安全。

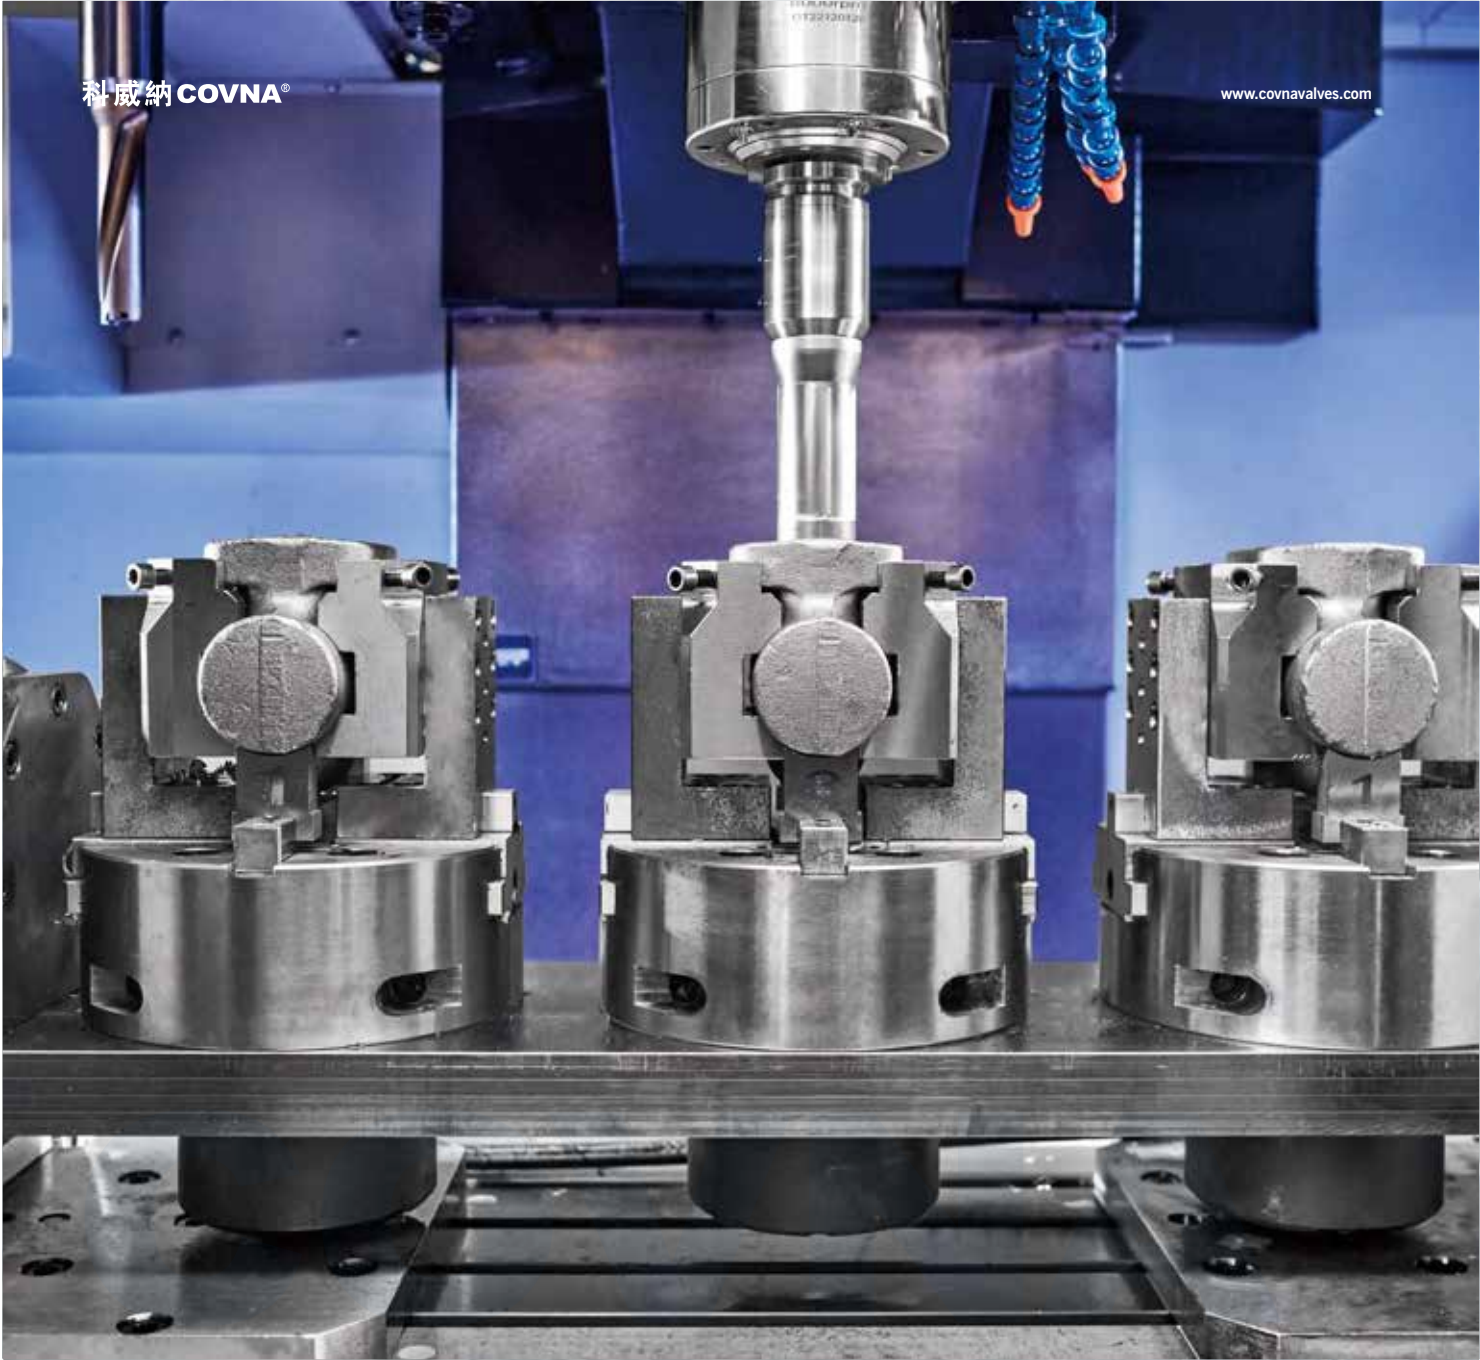

True craftsmanship lies in details; a tiny margin shapes the outcome.
Reject flaws, never settle for "good enough".
Treat every production process as a work of art to refine,
and safeguard fluid system safety with ultimate craftsmanship.



ASSEMBLY SITE

○ 装配现场

Every operation bears the imprint of craftsmanship.
The 6S Management System runs through the entire process.
Materials are classified and neatly arranged;
workstations are clean and well-organized.
This enables quality control to penetrate every detail of production.



COVNA

每一个操作都镌刻着匠心印记。
6S 管理体系贯穿全程，
物料分区规整，工位整洁有序，
让品质管控渗透到生产的每一个细节。



LABORATORY TESTING

○ 实验检测

Each valve is produced strictly acc. to the corresponding standard or customer's requirements. And it will be finally tested before shipment to ensure that the valve can operate safely in various complex conditions.



每台阀门都严格按照相应标准和客户要求生产,并在装运前进行最终检测,确保阀门能够在各类复杂工况中安全运作。



ELECTRIC VALVE SERIES

○ 电动阀门系列



BALL VALVES

○ 球阀类



ELECTRIC THREE-PIECE THREADED BALL VALVE

电动三片式螺纹球阀

产品型号Product Model: HK60-Q-3PS
公称通径Nominal Diameter: 8~100mm(1/4"~4")
公称压力Nominal Pressure: 1.0~6.4MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、油品、蒸气、硝酸
Water, oil steam, nitric acid



ELECTRIC THREE-PIECE WELDED BALL VALVE

电动三片式焊接球阀

产品型号Product Model: HK60-Q-3PS
公称通径Nominal Diameter: 8~100mm(1/4"~4")
公称压力Nominal Pressure: 1.0~6.4MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、油品、蒸气、硝酸
Water, oil steam, nitric acid



ELECTRIC SANITARY STAINLESS STEEL BALL VALVE

电动卫生级不锈钢球阀

产品型号Product Model: HK60-Q-W
公称通径Nominal Diameter: 8~100mm(1/4"~4")
公称压力Nominal Pressure: 1.0~6.4MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、油品、蒸气、硝酸
Water, oil steam, nitric acid



ELECTRIC FLANGED BALL VALVE

电动法兰球阀

产品型号Product Model: HK60-Q-2PS-F
公称通径Nominal Diameter: 8~100mm(1/4"~4")
公称压力Nominal Pressure: 1.0~6.4MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、油品、蒸气、硝酸
Water, oil steam, nitric acid



ELECTRIC FLANGED BALL VALVE

电动法兰球阀

产品型号Product Model: HK60Q-EX-F
公称通径Nominal Diameter: 8~100mm(1/4"~4")
公称压力Nominal Pressure: 1.0~6.4MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、油品、蒸气、硝酸
Water, oil steam, nitric acid



SULFUR RESISTANCE FIXED BALL VALVE

抗硫固定式球阀

产品型号Product Model: HK-Q11F
公称通径Nominal Diameter: 8~100mm(1/4"~4")
公称压力Nominal Pressure: 1.0~6.4MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、油品、蒸气、硝酸
Water, oil steam, nitric acid



ELECTRIC V-TYPE THROTTLE BALL VALVE ON THE LEFT

左侧电动V型节流球阀

产品型号Product Model: HK60-Q-V-F
公称通径Nominal Diameter: 8~100mm(1/4"~4")
公称压力Nominal Pressure: 1.0~6.4MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、油品、蒸气、硝酸
Water, oil steam, nitric acid



HIGH-PRESSURE ELECTRIC BALL VALVE

高压电动球阀

产品型号Product Model: HK60-Q-G
公称通径Nominal Diameter: 8~100mm(1/4"~4")
公称压力Nominal Pressure: 1.0~6.4MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、油品、蒸气、硝酸
Water, oil steam, nitric acid

BALL VALVES

○ 球阀类



ELECTRIC FLUORINE BALL VALVE
电动衬氟球阀

产品型号Product Model: HK60-Q-F-C
公称通径Nominal Diameter: 15~250mm
公称压力Nominal Pressure: 0.6~2.5MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
酸、碱、酮、醇、有机溶剂等
Acid,alkali, ketones, alcohol, organic solvents, etc



V-TYPE BALL VALVE
V型球阀

产品型号Product Model: HK60-Q-V-F
公称通径Nominal Diameter: 25~300mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~250°C
适用介质Suitable Medium:
水、溶剂、酸等
Water, solvents, acid, etc



ELECTRIC BALL VALVE
电动球阀

产品型号Product Model: HK-Q947F
公称通径Nominal Diameter: 100~1000mm
公称压力Nominal Pressure: 1.6~10.0MPa
适用温度Suitable temperature: -29°C~250°C
适用介质Suitable Medium:
水、油、蒸汽等
Water, oil steam, etc



ELECTRIC ECCENTRIC HALF BALL VALVE
电动偏心半球阀

产品型号Product Model: HK-PQ94F/V/H
公称通径Nominal Diameter: 40~800mm
公称压力Nominal Pressure: 1.0~4.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
煤粉、煤灰、含尘、气体
Coal powder, coal ash, dusty, gas



ELECTRIC FOUR BALL VALVE
电动四通球阀

产品型号Product Model: HK60-Q-4TF
公称通径Nominal Diameter: 15~1200mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~250°C
适用介质Suitable Medium:
水、蒸汽、油品、硝酸类、醋酸类等
Water,steam, oil products,nitric acid kind, Acetic acid kind etc



HIGH-PERFORMANCE LINE BALL VALVE
高性能管线球阀

产品型号Product Model: HK-Q961F
公称通径Nominal Diameter: 15~1400mm
公称压力Nominal Pressure: 1.6~42.0MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
气体
Gas



ELECTRIC SUPER SLIM BALL VALVE
电动超薄型球阀

产品型号Product Model: HK60-Q-B
公称通径Nominal Diameter: 15~200mm
公称压力Nominal Pressure: 1.0~4.0MPa
适用温度Suitable temperature: -29°C~250°C
适用介质Suitable Medium:
水、油、气及某些腐蚀性液体
Water,oil, gas and some corrosive liquid



ELECTRIC HEAT BALL VALVE
电动高温球阀

产品型号Product Model: HK-QZ941M
公称通径Nominal Diameter: 15~300mm
公称压力Nominal Pressure: 1.0~6.4MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、油品、蒸气、酸碱类
Water, oil, steam, acid and alkali class

BALL VALVES & BUTTERFLY VALVES

○ 球阀类/蝶阀类



ELECTRIC THREE-WAY PVC BALL VALVE
电动三通PVC球阀

产品型号Product Model: HK60-Q-PT
公称通径Nominal Diameter: 15~100mm(1/2"~4")
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: -10°C~80°C



ELECTRIC THREE-WAY SANITARY BALL VALVE
电动三通卫生级球阀

产品型号Product Model: HK60-Q-WT
公称通径Nominal Diameter: 19~102mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: -10°C~180°C



ELECTRIC THREE-WAY HIGH PRESSURE VALVE
电动三通高压球阀

产品型号Product Model: HK60-Q-GT
公称通径Nominal Diameter: 8~50mm(1/4"~2")
公称压力Nominal Pressure: 40MPa
适用温度Suitable temperature: -10°C~180°C



ELECTRIC EPOXY-COATED PTFE-LINED BUTTERFLY VALVE
电动环氧覆层四氟蝶阀

产品型号Product Model: HK60-D
公称通径Nominal Diameter: 40~2000mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
耐酸、碱、海水、污水、油、气等
Acid,alkali, sea water, sewage,oil,gas and other



ELECTRIC WAFER BUTTERFLY VALVE
电动对夹式蝶阀

产品型号Product Model: HK60-D971X
公称通径Nominal Diameter: 40~1200mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: -40°C~80°C
适用介质Suitable Medium:
水、气、油品等
Water, gas, oil, etc



ELECTRIC WAFER BUTTERFLY VALVE (LQ TYPE)
电动对夹式蝶阀(LQ型)

产品型号Product Model: HK-D971X
公称通径Nominal Diameter: 40~1200mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: -40°C~80°C
适用介质Suitable Medium:
水、气、油品等
Water, gas, oil, etc



ELECTRIC PVC BUTTERFLY VALVE
电动PVC蝶阀

产品型号Product Model: HK60-D-P
公称通径Nominal Diameter: 50~300mm(2"~12")
公称压力Nominal Pressure: 1.0MPa
适用温度Suitable temperature: 0°C~80°C
适用介质Suitable Medium:
水、气、油品等
Water, gas, oil, etc



ELECTRIC SANITARY MALE THREADED BUTTERFLY VALVE
电动卫生级螺纹蝶阀

产品型号Product Model: HK60-D-W
公称通径Nominal Diameter: 19~102mm外螺纹
公称压力Nominal Pressure: 1.0MPa
适用温度Suitable temperature: 10°C~180°C

BUTTERFLY VALVES & GATE VALVES

○ 蝶阀/闸阀类



ELECTRIC VACUUM BUTTERFLY VALVE

电动真空蝶阀

产品型号Product Model: HK60-D
公称通径Nominal Diameter: 50~400mm
适用温度Suitable temperature: -29°C~150°C
阀门漏率Gas leakage rate: $\leq 1.3 \times 10^{-5}$
适用范围Scope of application:
快卸法兰(KF) $2 \times 10^5 \sim 1.3 \times 10^5$
活套法兰(KF) $16 \times 10^5 \sim 1.3 \times 10^5$
主体材质The main materials:
不锈钢
stainless steel



ELECTRIC WAFER HARD SEALING BUTTERFLY VALVE

电动对夹式硬密封蝶阀

产品型号Product Model: HK-D973H
公称通径Nominal Diameter: 50~2000mm
公称压力Nominal Pressure: 0.6~2.5MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、空气、天然气、油品及弱腐蚀性流体
Water, air, gas, oil and Weak corrosive fluids



ELECTRIC STAINLESS STEEL BUTTERFLY VALVE

电动不锈钢蝶阀

产品型号Product Model: LHK60-D-GF
公称通径Nominal Diameter: 100~1000mm
公称压力Nominal Pressure: 1.0~4.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
煤气、含尘气体、烟道气等
Gas, dust-contained gas, such as black



ELECTRIC FLANGED BUTTERFLY VALVE

电动法兰蝶阀

产品型号Product Model: HK-D941X
公称通径Nominal Diameter: 40~1200mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: -40°C~80°C
适用介质Suitable Medium:
水、气、油品等
Water, gas, oil, etc



ELECTRIC STAINLESS STEEL GATE VALVE

电动不锈钢闸阀

产品型号Product Model: HK60-Z941W
公称通径Nominal Diameter: 15~800mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~350°C
适用介质Suitable Medium:
水、油品、蒸汽、酸、碱、氨、尿素、含硫天然气等
Water, oil, steam, and acid, alkali, Ammonia, urea, sulfur natural gas



ELECTRIC FLANGE GATE VALVES

电动法兰闸阀

产品型号Product Model: HK60-Z941H
公称通径Nominal Diameter: 15~1000mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、油品、蒸汽、酸性介质等
Water, oil, steam, acid medium etc



HIGH-TEMPERATURE GATE VALVE

高温闸阀

产品型号Product Model: HK60-Z941Y
公称通径Nominal Diameter: 80~800mm
公称压力Nominal Pressure: 1.6~16.0MPa
适用温度Suitable temperature: -29°C~540°C
适用介质Suitable Medium:
水、油品、蒸汽等
Water, oil, steam



WELDING ELECTRIC GATE VALVES

焊接电动闸阀

产品型号Product Model: HK60-Z961Y
公称通径Nominal Diameter: 50~600mm
公称压力Nominal Pressure: 16.0~32.0MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、蒸汽、油
Water, steam, oil

GATE VALVES / GLOBE VALVES / METALLURGICAL VALVES

○ 闸阀/截止阀/冶金阀类



ELECTRIC FLAT VALVE

电动平板闸阀

产品型号Product Model: HK60-Z943WF
公称通径Nominal Diameter: 100~1000mm
公称压力Nominal Pressure: 1.0~16.0MPa
适用温度Suitable temperature: -29°C~220°C
适用介质Suitable Medium:
石油、天然气
oil, natural gas



ELECTRIC WATER SEAL GATE VALVES

电动水封闸阀

产品型号Product Model: HK60-Z64
公称通径Nominal Diameter: 50~800mm
公称压力Nominal Pressure: 1.0~10.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、油品、蒸汽、非腐蚀性气体
Water, steam, oil products, not corruption, gas corrosion



CERAMIC GATE VALVES

陶瓷闸阀

产品型号Product Model: HK60-Z41TC
公称通径Nominal Diameter: 50~600mm
公称压力Nominal Pressure: 1.0~6.4MPa
适用温度Suitable temperature: -29°C~500°C
适用介质Suitable Medium:
灰渣水混合物
Ash mixture water



ELECTRIC GLOBE VALVE

电动截止阀

产品型号Product Model: HK60-Z941W
公称通径Nominal Diameter: 10~100mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、油品、蒸汽等
Water, oil, steam etc



ELECTRIC WELDING GLOBE VALVE

电动焊接截止阀

产品型号Product Model: HK60-Z
公称通径Nominal Diameter: 10~125mm
公称压力Nominal Pressure: 100V、140V、170V
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、油品、蒸汽
Water, oil, steam, etc



THE REV. TYPE HIGH TEMPERATURE AND HIGH PRESSURE RELIEF VALVE SPRING

敞开式插板阀

公称通径Nominal Diameter: 400~2800mm
公称压力Nominal Pressure: 0.05~0.25MPa
适用温度Suitable temperature:
200°C(硅橡胶)300°C(氟橡胶)
驱动方式Driving mode: 电动、液动、气动、电液动
Electric, hydraulic, pneumatic, electric hydraulic
适用介质Suitable Medium:
煤气及有毒、有害、易燃气体
Gas and poisonous, harmful, flammable gas



ELECTRIC FAN BLIND PLATE VALVES

电动扇形盲板阀

公称通径Nominal Diameter: 300~1800mm
公称压力Nominal Pressure: 0.05~0.25MPa
适用温度Suitable temperature:
200°C(硅橡胶)300°C(氟橡胶)
适用介质Suitable Medium:
煤气及有毒、有害、易燃气体
Gas and poisonous, harmful, flammable gas



PLUG-IN BOARDS VALVE CLOSED

封闭式插板阀

公称通径Nominal Diameter: 400~2800mm
公称压力Nominal Pressure: 0.05~0.25MPa
适用温度Suitable temperature:
200°C(硅橡胶)300°C(氟橡胶)
驱动方式Driving mode:
电动、液动、气动、电液动
Electric, hydraulic, pneumatic, electric hydraulic
适用介质Suitable Medium:
煤气及有毒、有害、易燃气体
Gas and poisonous, harmful flammable gas

MINIATURE ELECTRIC VALVE SERIES

○ 微型电动阀系列



MINIATURE ELECTRIC VALVES

○ 微型电动阀类



**MINIATURE ELECTRIC BALL VALVE
A150-T-2- STRAIGHT-THROUGH TYPE,
3-PIECE DESIGN**

微型电动球阀 A150-T-2-直通型，3片式

产品型号Product Model:	A150-T-2
公称通径Nominal Diameter:	15~50mm
公称压力Nominal Pressure:	1.0MPa
主体材质Main material:	适用介质Suitable Medium:
不锈钢Stainless steel	液体, 空气Liquid, air



**MINIATURE ELECTRIC BALL VALVE
A20-T-2- STRAIGHT-THROUGH TYPE**

微型电动球阀 A20-T-2-直通型

产品型号Product Model:	A20-T2
公称通径Nominal Diameter:	15~50mm
公称压力Nominal Pressure:	1.0MPa
主体材质Main material:	适用介质Suitable Medium:
黄铜, 不锈钢, PVCBronze, PVC, Stainless steel	液体, 空气Liquid, air



**MINIATURE ELECTRIC BALL VALVE
A20-T-2 (ONE-WAY) SANITARY GRADE**

微型电动球阀 A20-T-2(单向)卫生级

产品型号Product Model:	A20-T-S2-C
公称通径Nominal Diameter:	15~32mm
公称压力Nominal Pressure:	1.0MPa
主体材质Main material:	适用介质Suitable Medium:
不锈钢304, 316Stainless steel 304/316	液体, 空气Liquid, air



**MINIATURE ELECTRIC BALL VALVE
A20-T-Z - CONTROLLED
BY AN ELECTRIC TIMER**

微型电动三通球阀 A20-T-Z

产品型号Product Model:	T20-S3-A
公称通径Nominal Diameter:	15~25mm
公称压力Nominal Pressure:	1.0MPa
主体材质Main material:	适用介质Suitable Medium:
黄铜, 不锈钢304, 316Bronze, Stainless steel 304/316	液体, 空气Liquid, air



**MINIATURE ELECTRIC BALL VALVE
A20-T-2-STRAIGHT-THROUGH TYPE**

微型电动球阀 A20-T-2-直通型

产品型号Product Model:	T25-S2-A
公称通径Nominal Diameter:	15~50mm
公称压力Nominal Pressure:	1.0MPa
主体材质Main material:	适用介质Suitable Medium:
黄铜, 不锈钢, PVCBronze, PVC, Stainless steel	液体, 空气Liquid, air



**MINIATURE ELECTRIC
THROTTLE VALVE A150-T**

微型电动蝶阀 A150-T-(单向)卫生级

产品型号Product Model:	A150-T
公称通径Nominal Diameter:	25~32mm
公称压力Nominal Pressure:	1.0MPa
主体材质Main material:	适用介质Suitable Medium:
不锈钢Stainless steel	液体, 空气Liquid, air



**MINIATURE ELECTRIC BALL VALVE,
A150 EQUIPPED WITH PVC
MATERIAL T-SHAPED**

微型电动球阀 A150-T-2-行程式, PVC材质

产品型号Product Model:	A150-M
公称通径Nominal Diameter:	15~50mm
公称压力Nominal Pressure:	1.0MPa
主体材质Main material:	适用介质Suitable Medium:
PVC	液体, 空气Liquid, air



**MINIATURE ELECTRIC BALL VALVE
A150-T-Z-THREADED TYPE -
MADE OF PVC MATERIAL**

微型电动球阀 A150-T-Z-通径型 PVC材质

产品型号Product Model:	A150-M
公称通径Nominal Diameter:	15~50mm
公称压力Nominal Pressure:	1.0MPa
主体材质Main material:	适用介质Suitable Medium:
PVC	液体, 空气Liquid, air

PNEUMATIC VALVE SERIES

○ 气动阀门系列



BALL VALVES

○ 球阀类



TWO CHIP VERTICAL CHECK VALVE SPRING

气动二片式内螺纹球阀

产品型号Product Model:	HK56-2PS
公称通径Nominal Diameter:	6~100mm
公称压力Nominal Pressure:	1.6~6.4MPa
适用温度Suitable temperature:	-29°C~150°C
适用介质Suitable Medium:	水、蒸气、油品 Water, steam, oil products



PNEUMATIC 3 P TYPE THREADED BALL VALVE

气动3P式内螺纹球阀

产品型号Product Model:	HK56-3PS
公称通径Nominal Diameter:	1/4"~4"
公称压力Nominal Pressure:	1.6~6.4MPa
适用温度Suitable temperature:	-29°C~150°C
适用介质Suitable Medium:	水、油、气及某些腐蚀性液体 Water, oil, gas and somecorrosive liquid



HIGH-PRESSURE PNEUMATIC BALL VALVE

高压气动球阀

产品型号Product Model:	HK56-G
公称通径Nominal Diameter:	8~100mm(1/4"~4")
公称压力Nominal Pressure:	40.0MPa
适用温度Suitable temperature:	10°C~180°C
适用介质Suitable Medium:	液压、油、水、乙二醇 Hydraulic, oil, water, glycol



PNEUMATIC THREE-WAY SANITARY BALL VALVE

气动三通卫生级球阀

产品型号Product Model:	HK56-W
公称通径Nominal Diameter:	19~102mm
公称压力Nominal Pressure:	1.0~1.6MPa
适用温度Suitable temperature:	-10°C~180°C



PNEUMATIC THREE-WAY PVC BALL VALVE

气动三通PVC球阀

产品型号Product Model:	HK57-PF
公称通径Nominal Diameter:	15~100mm(1/2"~4")
公称压力Nominal Pressure:	1.0~1.6MPa
适用温度Suitable temperature:	-10°C~80°C



PNEUMATIC HIGH PLATFORM BALL VALVE

气动高平台球阀

产品型号Product Model:	HK55-F
公称通径Nominal Diameter:	15~200mm
公称压力Nominal Pressure:	1.6~6.4MPa
适用温度Suitable temperature:	-29°C~150°C
适用介质Suitable Medium:	水、油品、气等 Water, oil, gas, etc



PNEUMATIC TYPE O CUTTING BALL VALVE

气动O型切断球阀

产品型号Product Model:	HK55-F
公称通径Nominal Diameter:	15~200mm
公称压力Nominal Pressure:	1.6~10.0MPa
适用温度Suitable temperature:	-29°C~200°C
适用介质Suitable Medium:	蒸汽、水 Steam water



PNEUMATIC FLUORINE BALL VALVE

气动衬氟球阀

产品型号Product Model:	HK55-F-C
公称通径Nominal Diameter:	15~250mm
公称压力Nominal Pressure:	0.6~2.5MPa
适用温度Suitable temperature:	-29°C~150°C
适用介质Suitable Medium:	酸、碱、酮、醇、有机溶剂等 Acid,alkali, ketones, alcohol, organic solvents, etc

BALL VALVES

○ 球阀类



PNEUMATIC FIXED BALL VALVE

气动固定球阀

产品型号Product Model: HK-Q647Y
公称通径Nominal Diameter: 15-1000mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、蒸汽、油品、酸类
Water, steam, oil, acid



PNEUMATIC TEE LEI LINES IN BALL VALVES

气动三通内螺纹球阀

产品型号Product Model: HK56-T
公称通径Nominal Diameter: 15~100mm
公称压力Nominal Pressure: 1.0~6.4MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、蒸汽、油品、燃气
Water, steam, oil and gas



PNEUMATIC SUPER SLIM BALL VALVE

气动超薄型球阀

产品型号Product Model: HK54-B
公称通径Nominal Diameter: 15~200mm
公称压力Nominal Pressure: 1.0~4.0MPa
适用温度Suitable temperature: -29°C~250°C
适用介质Suitable Medium:
水、油、气及某些腐蚀性液体
Water,oil, gas and some corrosive liquid



PNEUMATIC TEE BALL VALVE

气动三通球阀

产品型号Product Model: HK56-TF
公称通径Nominal Diameter: 15~300mm
公称压力Nominal Pressure: 1.0~4.0MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、蒸汽、油品、酸、碱类
Water, steam, oil, acid alkali class



PNEUMATIC THREE-WAY PVC BALL VALVE

气动三通PVC球阀

产品型号Product Model: HK57-T
公称通径Nominal Diameter: 15~100mm(1/2"~4")
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: -10°C~80°C



PNEUMATIC THREE-WAY SANITARY BALL VALVE

气动三通卫生级球阀

产品型号Product Model: HK56-WT
公称通径Nominal Diameter: 19~102mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: -10°C~180°C



PNEUMATIC WITH MANUAL ECCENTRIC BALL VALVE

气动带手动偏心球阀

产品型号Product Model: HK-PQ647FY
公称通径Nominal Diameter: 25~800mm
公称压力Nominal Pressure: 1.0~6.4MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、蒸汽、油品、燃气
Water, steam, oil, and gas



PNEUMATIC V-TYPE BALL VALVE

气动V型节流球阀

产品型号Product Model: HK55-F-V
公称通径Nominal Diameter: 8~100mm(1/4"~4")
公称压力Nominal Pressure: 1.0~6.4MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、油品、蒸汽、硝酸
Water, oil steam, nitric acid



WEAR-RESISTING CERAMICS BALL VALVE

耐磨陶瓷球阀

产品型号Product Model: HK-Q41TC
公称通径Nominal Diameter: 15~300mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
煤粉、煤渣、粉状颗粒
Coal, coal, powder particles



PNEUMATIC HIGH TEMPERATURE BALL VALVE

气动高温球阀

产品型号Product Model: HK-QJ641M
公称通径Nominal Diameter: 15~300mm
公称压力Nominal Pressure: 1.0~4.0MPa
适用温度Suitable temperature: -29°C~250°C
适用介质Suitable Medium:
水、油、蒸汽
Water, oil, steam



PNEUMATIC ECCENTRIC ROTARY VALVE

气动偏心旋转阀

产品型号Product Model: HK-RB10-010zk
公称通径Nominal Diameter: 25~400mm
公称压力Nominal Pressure: 1.6~15MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、油、蒸汽
Water, oil, steam



PNEUMATIC FLANGED BUTTERFLY VALVE

气动法兰蝶阀

产品型号Product Model: HK59-D-F
公称通径Nominal Diameter: 40~1200mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: -40°C~80°C
适用介质Suitable Medium:
水、气、油品等
Water, gas, oil, etc



PNEUMATIC HIGH-PERFORMANCE BUTTERFLY VALVE

气动高性能蝶阀

产品型号Product Model: HK-D672F
公称通径Nominal Diameter: 40~1200mm
公称压力Nominal Pressure: 0.6~10MPa
适用温度Suitable temperature: -50°C~200°C
适用介质Suitable Medium:
水、空气、油品及弱腐蚀性流体
Water,air,oil and Weak corrosive fluids



PNEUMATIC WAFER HARD SEALING BUTTERFLY VALVE

气动对夹式硬密封蝶阀

产品型号Product Model: HK59-D-G
公称通径Nominal Diameter: 50~2000mm
公称压力Nominal Pressure: 0.6~2.5MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、空气、天然气、油品及弱腐蚀性流体
Water,air,gas,oil and Weak corrosive fluids



PNEUMATIC SANITARY CLAMP BUTTERFLY VALVE

气动卫生卡箍蝶阀

产品型号Product Model: HK59-D-W
公称通径Nominal Diameter: 5~80mm(1/4"~3")
公称压力Nominal Pressure: 1.0~6.4MPa
适用温度Suitable temperature: 10°C~180°C



PNEUMATIC SANITARY WAFER BUTTERFLY VALVE

气动卫生对夹蝶阀

产品型号Product Model: HK-WD671X
公称通径Nominal Diameter: 5~80mm(1/4"~3")
公称压力Nominal Pressure: 1.0~6.4MPa
适用温度Suitable temperature: 10°C~180°C

BUTTERFLY VALVES / GATE VALVES / GLOBE VALVES /
ANGLE SEAT VALVES / REGULATING VALVES

○ 蝶阀/闸阀/截止阀/角座阀/调节阀类



PNEUMATIC WAFER
BUTTERFLY VALVE

气动对夹式蝶阀

产品型号Product Model:	HK59-D-X
公称通径Nominal Diameter:	40~400mm
公称压力Nominal Pressure:	1.0~1.6MPa
适用温度Suitable temperature:	-40°C~80°C
适用介质Suitable Medium:	水、气、油品等 Water, gas, oil, etc



PNEUMATIC LUG TYPE SOFT-SEALED
CENTERLINE BUTTERFLY VALVE

气动凸耳式软密封中线蝶阀

产品型号Product Model:	HK59-D-M
公称通径Nominal Diameter:	50~600mm
公称压力Nominal Pressure:	0.6~1.6MPa
适用温度Suitable temperature:	0°C~80°C
适用介质Suitable Medium:	水、污水 water, sewage



ELECTRIC EPOXY COATING LAYER
FOUR FLUORINE BUTTERFLY VALVE

电动环氧覆层四氟蝶阀

产品型号Product Model:	HK59-4F
公称通径Nominal Diameter:	40~2000mm
公称压力Nominal Pressure:	1.0~1.6MPa
适用温度Suitable temperature:	-29°C~150°C
适用介质Suitable Medium:	耐酸、碱、海水、污水、油、气等 Acid, alkali, sea water, sewage, oil, gas and other



FLUORINE-LINED PNEUMATIC
WAFER BUTTERFLY VALVE

衬氟气动对夹蝶阀

产品型号Product Model:	HK59-D-C
公称通径Nominal Diameter:	40~800mm
公称压力Nominal Pressure:	1.0~1.6MPa
适用温度Suitable temperature:	-29°C~150°C
适用介质Suitable Medium:	各种腐蚀性介质 All kinds of corrosive medium



PNEUMATIC VACUUM
BUTTERFLY VALVE

气动真空蝶阀

产品型号Product Model:	HK59-D
公称通径Nominal Diameter:	50~600mm
适用温度Suitable temperature:	-29°C~150°C
阀门漏率Gas leakage rate:	≤1.3×10 ⁻⁶
适用范围Scope of application:	2×105~1.3×10 ⁻⁵
主体材质The main materials:	不锈钢 stainless steel



PNEUMATIC UPVC
BUTTERFLY VALVE

气动UPVC蝶阀

产品型号Product Model:	HK59-D-P
公称通径Nominal Diameter:	50~300mm(2"~12")
公称压力Nominal Pressure:	1.0MPa
适用温度Suitable temperature:	0°C~80°C
适用介质Suitable Medium:	水、气、油品等 Water, gas, oil, etc



PNEUMATIC
GATE VALVES

气动闸阀

产品型号Product Model:	HK-Z6S41H
公称通径Nominal Diameter:	50~600mm
公称压力Nominal Pressure:	1.6~6.4MPa
适用温度Suitable temperature:	-29°C~600°C
适用介质Suitable Medium:	水、油品、蒸汽 Water, oil, steam



PNEUMATIC
FLAT VALVE

气动平板闸阀

产品型号Product Model:	HK-Z643WF
公称通径Nominal Diameter:	50~800mm
公称压力Nominal Pressure:	1.6~2.5MPa
适用温度Suitable temperature:	-29°C~220°C
适用介质Suitable Medium:	水、油品、天然气 Water, oil, natural gas

REGULATING VALVES &
METALLURGICAL VALVES

○ 调节阀/冶金阀类



PNEUMATIC
GLOBE VALVE

气动截止阀

产品型号Product Model:	HK-J641W
公称通径Nominal Diameter:	100~100mm
公称压力Nominal Pressure:	1.6~6.4MPa
适用温度Suitable temperature:	-29°C~600°C
适用介质Suitable Medium:	水、油品、天然气 Water, oil, natural gas



PNEUMATIC ANGLE
VALVE SEAT

气动角座阀

产品型号Product Model:	HK17S
公称通径Nominal Diameter:	10~60mm
公称压力Nominal Pressure:	1.0~1.6MPa
适用温度Suitable temperature:	-29°C~150°C
适用介质Suitable Medium:	水、液体、水蒸气 water, liquid, and water vapor



OXYGEN CONTROL VALVE

氧气调节阀

产品型号Product Model:	HK-ZJHM
公称通径Nominal Diameter:	20~200mm
公称压力Nominal Pressure:	1.0~6.4MPa
适用温度Suitable temperature:	-29°C~150°C
适用介质Suitable Medium:	氧气 Oxygen



PNEUMATIC CERAMIC DUAL-PLATE
GATE VALVE

气动陶瓷双闸板阀

产品型号Product Model:	HK-Z644TC
公称通径Nominal Diameter:	50~600mm
公称压力Nominal Pressure:	1.6MPa
适用温度Suitable temperature:	-29°C~18 0°C
适用介质Suitable Medium:	干粉/粉尘、浆状混合物、含颗粒液体 Dry powder/dust, paste-like mixture, liquid containing particles



PNEUMATIC FAN-SHAPED BLIND
PLATE VALVES

气动扇形盲板阀

公称通径Nominal Diameter:	300~1200mm
公称压力Nominal Pressure:	0.05~0.25MPa
适用温度Suitable temperature:	200°C(硅橡胶)300°C(氟橡胶)
适用介质Suitable Medium:	煤气及有毒、有害、易燃气体 Gas and poisonous, harmful, flammable gas



PNEUMATIC BELL ASH
DISCHARGE VALVE

气动钟形卸灰阀

公称通径Nominal Diameter:	200~800mm
适用温度Suitable temperature:	≤300°C
适用介质Suitable Medium:	煤气粉尘、烟粉尘等干燥粉状物质 Gas dust and smoke dust, and other dry powder materials



VACUUM ISOLATION VALVES

真空隔离阀

公称通径Nominal Diameter:	100~350mm
公称压力Nominal Pressure:	0.1 MPa
适用温度Suitable temperature:	≤300°C
驱动方式Driving mode:	手动、电动、气动、液动 Manual and electric pneumatic hydraulic
适用介质Suitable Medium:	干燥物质 Dry material



GAS TEE SWITCH VALVE

煤气三通切换阀

公称通径Nominal Diameter:	500~2400mm
公称压力Nominal Pressure:	0.1MPa
适用温度Suitable temperature:	≤120°C
驱动方式Driving way:	气动、液动 Pneumatic hydraulic
适用介质Suitable Medium:	含尘气体、烟气、空气、煤气等 Dust-contained gas, gas, air, gas, etc
启闭切换时间On-off swtch time:	≤15秒

CONTROL VALVE SERIES

○ 调节阀系列



REGULATING VALVES

○ 调节阀类



ELECTRIC HIGH-PRESSURE REGULATING VALVE

电动高压调节阀

产品型号Product Model: HK-T948Y
公称通径Nominal Diameter: 1/2"-8"
公称压力Nominal Pressure: 600Lb~2500Lb
适用温度Suitable temperature: -29°C~450°C
适用介质Suitable Medium:
水、油品、蒸汽、液体
Water, oil, steam, liquid



ELECTRIC LARGE-DIAMETER REGULATING VALVE

电动大口径调节阀

产品型号Product Model: HK-T948Y
公称通径Nominal Diameter: 15~800mm
公称压力Nominal Pressure: 600Lb~2500Lb
适用温度Suitable temperature: -29°C~450°C
适用介质Suitable Medium:
水、油品、蒸汽、液体
Water, oil, steam, liquid



ELECTRIC REGULATOR

电动调节阀

产品型号Product Model: HK-ZDLM
公称通径Nominal Diameter: 15~300mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~450°C
适用介质Suitable Medium:
气体、液体
Gas, liquid



ELECTRIC REGULATOR

电动调节阀

产品型号Product Model: HK-T961Y
公称通径Nominal Diameter: 15~30mm
公称压力Nominal Pressure: 2.5~3.2MPa
适用温度Suitable temperature: -29°C~450°C
适用介质Suitable Medium:
锅炉给水
Boiler water supply



ELECTRIC SOCKET REGULATOR

电动套筒调节阀

产品型号Product Model: HK-ZAZM
公称通径Nominal Diameter: 15~300mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~450°C
适用介质Suitable Medium:
液体、气体
Liquid, gas



BALANCED ELECTRIC REGULATOR

平衡式电动调节阀

产品型号Product Model: HK-DWDP
公称通径Nominal Diameter: 15~200mm
公称压力Nominal Pressure: 1.6~2.5MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、蒸气
Water, steam



ELECTRIC SINGLE SEAT REGULATOR

电动单座调节阀

产品型号Product Model: HK-ZNZP/N
公称通径Nominal Diameter: 15~300mm
公称压力Nominal Pressure: 1.0~6.4MPa
适用温度Suitable temperature: -29°C~450°C
适用介质Suitable Medium:
控制气体、液体、蒸气
Control gas, liquid, steam



ELECTRIC EXPLOSION-PROOF REGULATOR

电动防爆调节阀

产品型号Product Model: HK-ZDLM/T947H
公称通径Nominal Diameter: 15~200mm
公称压力Nominal Pressure: 1.0~6.4MPa
适用温度Suitable temperature: -20°C~200°C
适用介质Suitable Medium:
蒸气、水、油、气体
Steam, water, oil and gas

REGULATING VALVES

○ 调节阀类



SELF-TRLIANCE TYPE ELECTRIC TEMPERATURE REGULATOR

自力式电控制温度调节阀

产品型号Product Model:	HK-ZZWP
公称通径Nominal Diameter:	15~200mm
公称压力Nominal Pressure:	1.0~6.4MPa
适用温度Suitable temperature:	-29°C~425°C
适用介质Suitable Medium:	蒸气、水、油、气体 Steam, water, oil and gas



ELECTRIC HIGH-PRESSURE VALVES

电动高压阀

产品型号Product Model:	HK-T969Y
公称通径Nominal Diameter:	15~50mm
公称压力Nominal Pressure:	2.5~3.2MPa
适用温度Suitable temperature:	-29°C~425°C
适用介质Suitable Medium:	水、蒸气 Water, steam



ELECTRIC 3-WAY REGULATING VALVE

电动三通调节阀

产品型号Product Model:	HK-ZDLX/ZDLQ
公称通径Nominal Diameter:	15~300mm
公称压力Nominal Pressure:	1.0~6.4MPa
适用温度Suitable temperature:	-40°C~450°C
适用介质Suitable Medium:	气体、液体 Gas, liquid



ELECTRIC INTELLIGENT REGULATOR

电动智能型调节阀

产品型号Product Model:	HK-T968Y
公称通径Nominal Diameter:	15~300mm
公称压力Nominal Pressure:	1.6~6.4MPa
适用温度Suitable temperature:	-25°C~70°C
适用介质Suitable Medium:	气体、液体 Gas, liquid



PNEUMATIC REGULATING VALVE

气动调节阀

产品型号Product Model:	HK-T968Y
公称通径Nominal Diameter:	15~800mm
公称压力Nominal Pressure:	600Lb~2500Lb
适用温度Suitable temperature:	-29°C~450°C
适用介质Suitable Medium:	水、油品、蒸汽、液体 Water, oil, steam, liquid



PNEUMATIC REGULATING VALVE

气动调节阀

产品型号Product Model:	HK-T968Y
公称通径Nominal Diameter:	15~800mm
公称压力Nominal Pressure:	600Lb~2500Lb
适用温度Suitable temperature:	-29°C~450°C
适用介质Suitable Medium:	水、油品、蒸汽、液体 Water, oil, steam, liquid



PNEUMATIC REGULATING VALVE

气动调节阀

产品型号Product Model:	HK-T968Y
公称通径Nominal Diameter:	15~800mm
公称压力Nominal Pressure:	600Lb~2500Lb
适用温度Suitable temperature:	-29°C~450°C
适用介质Suitable Medium:	水、油品、蒸汽、液体 Water, oil, steam, liquid



FLUORINE REGULATOR

衬氟调节阀

产品型号Product Model:	HK-ZHF46-F4
公称通径Nominal Diameter:	15~200mm
公称压力Nominal Pressure:	0.6~1.6MPa
适用温度Suitable temperature:	-29°C~150°C
适用介质Suitable Medium:	酸、碱、酮、醇、有机溶剂等 Acid, alkali, ketones, alcohol, organic solvents, etc

REGULATING VALVES

○ 调节阀类



PNEUMATIC RUBBER LINING GLOBE VALVE

气动衬胶截止阀

产品型号Product Model:	HK-J6B41J
公称通径Nominal Diameter:	15~200mm
公称压力Nominal Pressure:	0.6~1.6MPa
适用温度Suitable temperature:	-40°C~80°C
适用介质Suitable Medium:	非腐蚀性或一般腐蚀性介质 The corrosive or general corrosive medium



SELF-RELIANCE TYPE PRESSURE REGULATOR

自力式压力调节阀

产品型号Product Model:	HK-ZZYP
公称通径Nominal Diameter:	15~300mm
公称压力Nominal Pressure:	1.0~6.4MPa
适用温度Suitable temperature:	-29°C~425°C
适用介质Suitable Medium:	控制气体、液体、蒸气 Control gas, liquid, steam



PRESSURE DIFFERENTIAL REGULATOR

自力式差压控制阀

产品型号Product Model:	HK-V230
公称通径Nominal Diameter:	15~400mm
公称压力Nominal Pressure:	1.6~4.0MPa
适用温度Suitable temperature:	-5°C~230°C
适用介质Suitable Medium:	控制气体、液体、蒸气 Control gas, liquid, steam



TAKE THE HANDLE ALL THE REV. TYPE THE RELIEF VALVE SPRING

自力式压力调节阀

产品型号Product Model:	HK-V231D01
公称通径Nominal Diameter:	15~250mm
公称压力Nominal Pressure:	1.0~6.4MPa
适用温度Suitable temperature:	-20°C~450°C
适用介质Suitable Medium:	控制气体、液体、蒸气 Control gas, liquid, steam



COMMAND PRESSURE REGULATOR

指挥器压力调节阀

产品型号Product Model:	HK-ZZVP
公称通径Nominal Diameter:	15~100mm
公称压力Nominal Pressure:	1.0~4.0MPa
适用温度Suitable temperature:	≤80°C
适用介质Suitable Medium:	控制气体、液体、蒸气 Control gas, liquid, steam



SELF-TRLIANCE DECLINED PRESSURE REGULATOR

自力式微压调节阀

产品型号Product Model:	HK-ZZV
公称通径Nominal Diameter:	15~300mm
公称压力Nominal Pressure:	1.6~6.4MPa
适用温度Suitable temperature:	≤350°C
适用介质Suitable Medium:	气体、液体、蒸气 Gas, liquid and steam



PNEUMATIC SLIDE VALVE

气动滑板阀

产品型号Product Model:	HK-V500-000ZK
公称通径Nominal Diameter:	15~400mm
公称压力Nominal Pressure:	PN10~100
适用温度Suitable temperature:	≤425°C
适用介质Suitable Medium:	气体、液体、蒸气 Gas, liquid and steam



TWO-SEATER EGULATOR

双座调节阀

产品型号Product Model:	HK-ZXN
公称通径Nominal Diameter:	15~200mm
公称压力Nominal Pressure:	1.0~6.4MPa
适用温度Suitable temperature:	-20°C~425°
适用介质Suitable Medium:	液体、气体、蒸气 Liquids, gases, vapors

REGULATING VALVES

○ 调节阀类



PNEUMATIC 3-WAY REGULATING VALVE

气动三通调节阀

产品型号Product Model:	HK-ZMAX/ZMAQ
公称通径Nominal Diameter:	15~300mm
公称压力Nominal Pressure:	1.0~6.4MPa
适用温度Suitable temperature:	-40°C~315°C
适用介质Suitable Medium:	气体、液体 Gas, liquid



PNEUMATIC TWO-WAY REGULATING VALVE

调节阀

产品型号Product Model:	HK-HCBCV3000
公称通径Nominal Diameter:	15~200mm
公称压力Nominal Pressure:	1.0~6.4MPa
适用温度Suitable temperature:	-29°C~425°C
适用介质Suitable Medium:	气体、液体 Gas, liquid



LOW NOISE CAGE TYPE REGULATING VALVE

低噪音笼式调节阀

产品型号Product Model:	HK-HCN
公称通径Nominal Diameter:	15~300mm
公称压力Nominal Pressure:	1.6~6.4MPa
适用温度Suitable temperature:	-29°C~425°C
适用介质Suitable Medium:	气体、液体 Gas, liquid



PNEUMATIC ANGLE TYPE REGULATING VALVE

气动角型调节阀

产品型号Product Model:	HK-HAV
公称通径Nominal Diameter:	15~200mm
公称压力Nominal Pressure:	1.6~6.4MPa
适用温度Suitable temperature:	-29°C~425°C
适用介质Suitable Medium:	气体、液体 Gas, liquid



PNEUMATIC FLUORINE REGULATING VALVE

气动衬氟调节阀

产品型号Product Model:	HK-ZMAPF46
公称通径Nominal Diameter:	15~150mm
公称压力Nominal Pressure:	1.0~6.4MPa
适用温度Suitable temperature:	-29°C~150°C
适用介质Suitable Medium:	气体、液体 Gas, liquid



PNEUMATIC DIAPHRAGM SHUT-OFF VALVE

气动薄膜切断阀

产品型号Product Model:	HK-ZMQP
公称通径Nominal Diameter:	15~100mm
公称压力Nominal Pressure:	1.6~6.4MPa
适用温度Suitable temperature:	-29°C~425°C
适用介质Suitable Medium:	水、气体、蒸气 Water, steam, gas



SINGLE SEAT REGULATING VALVE

单座调节阀

产品型号Product Model:	HK-ZXP
公称通径Nominal Diameter:	15~200mm
公称压力Nominal Pressure:	1.6~10.0MPa
适用温度Suitable temperature:	-29°C~425°C
适用介质Suitable Medium:	液体、气体、蒸气 Liquids, gases, vapors



SINGLE-SEAT REGULATING VALVE WITH HANDWHEEL

带手轮单座调节阀

产品型号Product Model:	HK-ZXP
公称通径Nominal Diameter:	15~200mm
公称压力Nominal Pressure:	1.6~6.4MPa
适用温度Suitable temperature:	-20°C~450°C
适用介质Suitable Medium:	液体、气体、蒸气 Liquids, gases, vapors

SOLENOID VALVE SERIES

○ 电磁阀系列



SOLENOID VALVE

○ 电磁阀类

2W21 SOLENOID VALVE



2W21电磁阀

产品型号Product Model:	2W21
公称通径Nominal Diameter:	15~50mm
公称压力Nominal Pressure:	0-4kaf/ cm ²
适用温度Suitable temperature:	0°C~80°C
适用介质Suitable Medium:	煤气、甲烷、瓦斯
Gas, methane, gas	

2W21-S SOLENOID VALVE



2W21-S电磁阀

产品型号Product Model:	2W21-S
公称通径Nominal Diameter:	15~50mm
公称压力Nominal Pressure:	0-10Bar
适用温度Suitable temperature:	0°C~80°C
适用介质Suitable Medium:	水、空气、石油、气体等
Water, air, petroleum, gas, etc.	

DFD-40JF SOLENOID VALVE



DFD-40JF电磁阀

产品型号Product Model:	HK-DFD40JF
公称通径Nominal Diameter:	15~200mm
公称压力Nominal Pressure:	常开式: 0.3~8bar 常闭式: 0.3~12bar
适用温度Suitable temperature:	-29°C~150°C
适用介质Suitable Medium:	液体、水、气体、油 (20CST以下)
Liquid, water,gas,oi(20 CST below))	

DF-150CF SOLENOID VALVE



DF-150CF电磁阀

产品型号Product Model:	HK-DF150CF
公称通径Nominal Diameter:	40~200mm
公称压力Nominal Pressure:	常开式: 0.3~8bar 常闭式: 0.3~12bar
适用温度Suitable temperature:	-29°C~160°C
适用介质Suitable Medium:	液体、水、气体、油 (20CST以下)
Liquid, water,gas,oil(20 CST below))	

ZCT/ZCQ SOLENOID VALVE



ZCT/ZCQ 电磁阀

产品型号Product Model:	HK-ZCT/ZCQ
公称通径Nominal Diameter:	3~20mm
公称压力Nominal Pressure:	常闭式: 0~10 kgf/cm ²
适用温度Suitable temperature:	-29°C~150°C
适用介质Suitable Medium:	蒸气、水、油、弱酸性液体
Steam, water, oil, weak acid alkli liquid	

ZQDF STEAM SOLENOID VALVE



蒸汽电磁阀

产品型号Product Model:	HK-ZQDF
公称通径Nominal Diameter:	40~200mm
公称压力Nominal Pressure:	1. 6MPa
适用温度Suitable temperature:	-10°C~180°C
适用介质Suitable Medium:	蒸气、蒸馏水
steam, distilled water	

ZW SOLENOID VALVE



电磁阀

产品型号Product Model:	HK-ZW
公称通径Nominal Diameter:	8~100mm
公称压力Nominal Pressure:	0-10kgf/cm ²
适用温度Suitable temperature:	-29°C~150°C
适用介质Suitable Medium:	空气、水、油
Air, water,oil	

2W31 SOLENOID VALVE



2W31电磁阀

产品型号Product Model:	2W31-15
公称压力Nominal Pressure:	0~10Bar
适用温度Suitable temperature:	5°C~80°C
主体材质Main material:	不锈钢, 黄铜
Stainless steel, Bronze	
适用介质Suitable Medium:	水、空气、气体等
Water, air, gases, etc.	

SOLENOID VALVE SERIES

○ 电磁阀类

HKP-S SOLENOID VALVE



HKP-S电磁阀

产品型号Product Model:	HKP-S
公称压力Nominal Pressure:	0~10Bar
适用温度Suitable temperature:	5°C~80°C
主体材质Main material:	不锈钢, 黄铜
Stainless steel, Bronze	
适用介质Suitable Medium:	水、空气、气体等
Water, air, gases, etc.	

HKG11 MINIATURE SOLENOID VALVE



HKG11微型电磁阀

产品型号Product Model:	HKG11
公称压力Nominal Pressure:	0~10Bar
适用温度Suitable temperature:	10°C~80°C
主体材质Main material:	黄铜
Bronze	
适用介质Suitable Medium:	空气、水、蒸汽、石油、气体等
Air, water, steam, petroleum, gas, etc.	

HK0018 SOLENOID VALVE



HK0018电磁阀

产品型号Product Model:	HK0018
公称压力Nominal Pressure:	0~10Bar, 0~16Bar
适用温度Suitable temperature:	5°C~180°C
主体材质Main material:	不锈钢
Stainless steel	
适用介质Suitable Medium:	水、酒精、无酒精饮料、葡萄酒等
Water, alcohol, non-alcoholic beverages, wine, etc.	

HK08-S SOLENOID VALVE



HK08-S 电磁阀

产品型号Product Model:	HK08-S
公称压力Nominal Pressure:	0~16Bar/25~40Bar
适用温度Suitable temperature:	HK08S型: -10~180°C HK08G型: -10~180°C
主体材质Main material:	不锈钢Stainless steel
适用介质Suitable Medium:	蒸汽、热水、热油、石油、民用燃气等
Steam, hot water, hot oil, petroleum, and domestic gas, etc.	

HK10-SF SOLENOID VALVE



HK10-SF 高温不锈钢电磁阀

公称压力Nominal Pressure:	0.5~1.6Bar
适用温度Suitable temperature:	-10°C~300°C
主体材质Main material:	不锈钢
Stainless steel	
适用介质Suitable Medium:	蒸汽、热水、水、油等
Steam, hot water, water, oil, etc.	

HK5231015 SOLENOID VALVE



HK5231015 高压电磁阀

产品型号Product Model:	HK5231015
公称压力Nominal Pressure:	0.03~50Bar
适用温度Suitable temperature:	0°C~120°C
主体材质Main material:	黄铜
Bronze	
适用介质Suitable Medium:	液化天然气、中亚国家天然气等
Liquefied natural gas, natural gas from Central Asian countries, etc.	

HKKB SOLENOID VALVE



HKKB 电磁阀

产品型号Product Model:	HKKB
公称压力Nominal Pressure:	450Bar
适用温度Suitable temperature:	10°C~180°C
主体材质Main material:	不锈钢
Stainless steel	
适用介质Suitable Medium:	水、压缩空气等
Water, compressed air, etc.	

HKFR SOLENOID VALVE



HKFR 电磁阀

产品型号Product Model:	HKFR
公称压力Nominal Pressure:	0~2Bar
适用温度Suitable temperature:	5°C~80°C
主体材质Main material:	PTFE
适用介质Suitable Medium:	腐蚀性液体和气体、酸、碱等
Corrosive liquids and gases, acids, bases, etc.	


INDUSTRIAL VALVE SERIES

○ 通用阀门系列



BALL VALVES

○ 球阀类



GB FLOATING BALL VALVE

国标浮动球阀


产品型号Product Model: Q41F
公称通径Nominal Diameter: 15~200mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: PTFE: -20~180°C Metal seal: -20~450°C
适用介质Suitable Medium: 水、蒸汽、油品、酸类
Water, steam, oil, acid



ANSI FLOATING BALL VALVE

美标球阀

产品型号Product Model: Q41F
公称通径Nominal Diameter: 1/2"~28"
公称压力Nominal Pressure: 150~900LB
适用温度Suitable temperature: PTFE: -20~180°C Metal seal: -20~450°C
适用介质Suitable Medium: 水、油品、蒸汽等
Water, oil, steam, etc



DIN FLOATING BALL VALVE

德标浮动球阀

产品型号Product Model: Q41F
公称通径Nominal Diameter: 15~200mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: PTFE: -20~180°C Metal seal: -20~450°C
适用介质Suitable Medium: 水、蒸汽、油品、酸类
Water, steam, oil, acid



JIS FLOATING BALL VALVE

日标球阀

产品型号Product Model: Q41F
公称通径Nominal Diameter: 50~600mm
公称压力Nominal Pressure: 10K~40K
适用温度Suitable temperature: PTFE: -20~180°C Metal seal: -20~450°C
适用介质Suitable Medium: 水、蒸汽、油
Water, steam, oil



HARD-SEALED FLOATING BALL VALVE

硬密封浮动球阀

产品型号Product Model: Q41F
公称通径Nominal Diameter: 1/2"~10"
公称压力Nominal Pressure: 150~300Lb
适用温度Suitable temperature: -29°C~450°C
适用介质Suitable Medium: 水、蒸汽、油品、酸类
Water, steam, oil, acid



HIGH PLATFORM MANUAL BALL VALVE

高平台手动球阀

产品型号Product Model: Q41F
公称通径Nominal Diameter: 15~800mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: PTFE: 20~180°C Metal seal: -20~450°C
适用介质Suitable Medium: 水、油品、蒸汽等
Water, oil, steam, etc



ANSI STANDARD FIXED BALL VALVE

美标固定球阀

产品型号Product Model: Q347F
公称通径Nominal Diameter: 50~1000mm
公称压力Nominal Pressure: 150~900LB
适用温度Suitable temperature: -29°C~180°C
适用介质Suitable Medium: 水、气、油品、天然气
Water, gas, oil and natural gas



WORM GEAR FIXED BALL VALVE

蜗轮固定球阀

产品型号Product Model: Q341F
公称通径Nominal Diameter: 15~500mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~180°C
适用介质Suitable Medium: 水、蒸汽、油品、酸类
Water, steam, oil, acid

BALL VALVES

○ 球阀类

STAINLESS STEEL TEE BALL VALVE

三通球阀



产品型号Product Model: Q44F/Q45F
公称通径Nominal Diameter: 15~300mm
公称压力Nominal Pressure: 1.0~4.0MPa
适用温度Suitable temperature: -29°C~180°C
适用介质Suitable Medium:
水、蒸汽、油品、酸、碱类
Water, steam, oil, acid alkali class

TRUE TEE FOUR SEALING BALL VALVES

真三通四密封球阀



产品型号Product Model: Q44F/45F
公称通径Nominal Diameter: 15~200mm
公称压力Nominal Pressure: 1.0~4.0MPa
适用温度Suitable temperature: -29°C~180°C
适用介质Suitable Medium:
水、蒸汽、油品、酸、碱类
Water, steam, oil, acid alkali class

FOUR WAY BALL VALVE

四通球阀



产品型号Product Model: Q46F
公称通径Nominal Diameter: 50~300mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~180°C
适用介质Suitable Medium:
水、油品、蒸汽等
Water, oil, steam, etc

MEANING TYPE SUPER SLIM BALL VALVE

意式超薄型球阀



产品型号Product Model: Q73F
公称通径Nominal Diameter: 15~200mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: -29°C~250°C
适用介质Suitable Medium:
水、油、气及某些腐蚀性液体
Water,oil, gas and some corrosive liquid

ONE-PIECE BALL VALVE

一体式球阀



产品型号Product Model: Q41F
公称通径Nominal Diameter: 15~100mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~250°C
适用介质Suitable Medium:
水、油、汽等耐蚀和腐性介质
Water,oil, steam corrosion resistant and corrupt sex medium

HIGH TEMPERATURE STAINLESS STEEL BALL VALVE

高温球阀



产品型号Product Model: QQ41M
公称通径Nominal Diameter: 15~200mm
公称压力Nominal Pressure: 1.0~10.0MPa
适用温度Suitable temperature: -29°C~250°C
适用介质Suitable Medium:
水、气、油品、天然气和酸碳 腐蚀性介质
Water,gas,oil, naturalgas and carbon acid corrosive medium

ECCENTRIC HEMISPHERICAL VALVE

偏心半球阀



产品型号Product Model: PQ347F/H
公称通径Nominal Diameter: 25~1000mm
公称压力Nominal Pressure: 1.0~4.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、蒸汽、油品、泥砂、煤粉、灰渣、颗粒状介质等
Water, steam, oil products, mud and sand, coal Ash, granular media, etc

TRACK HARD SEAL BALL VALVE

轨道硬密封球阀



产品型号Product Model: GQ47F/H
公称通径Nominal Diameter: 15~600mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -196°C~425°C
适用介质Suitable Medium:
水,蒸汽,油品,硝酸类,醋酸类,天然气,热油,LPG等
Water, steam, oil, products, nitric acid, kind acetic acid kind, natural gas, heat oil, LPG etc

BALL VALVES

○ 球阀类

TOP ENTRY TRUNNION MOUNTED BALL VALVE

上装式固定球阀



产品型号Product Model: TQ347F/H
公称通径Nominal Diameter: 50~600mm
公称压力Nominal Pressure: 1.6~42MPa
适用温度Suitable temperature: -29°C~300°C
适用介质Suitable Medium:
水、油、气等
Water, oil, gas, etc

THREE-PIECE FLANGED BALL VALVE

三片式法兰球阀



产品型号Product Model: Q41F
公称通径Nominal Diameter: 15~100mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -20°C~180°C
适用介质Suitable Medium:
水、油品、蒸汽
Water,oil,steam

WIDE TYPE FLANGED BALL VALVES

广式法兰球阀



产品型号Product Model: Q14F
公称通径Nominal Diameter: 15~100mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~180°C
适用介质Suitable Medium:
水、油、气及某些腐蚀性液体
Water,oil, gas and some corrosive liquid

INTEGRAL FLANGE INSULATION BALL VALVE

整体式法兰保温球阀



产品型号Product Model: QB41F
公称通径Nominal Diameter: 15~200mm
公称压力Nominal Pressure: 1.0~4.0MPa
适用温度Suitable temperature: -29°C~180°C
适用介质Suitable Medium:
重油、胶类、腐蚀性介质
Heavy oil, glue kind, corrosive medium

DISCHARGE BALL VALVE

放料球阀



产品型号Product Model: FQ41F
公称通径Nominal Diameter: 25~100mm
公称压力Nominal Pressure: 1.6~2.5MPa
适用温度Suitable temperature: -29°C~180°C
适用介质Suitable Medium:
Oil, acid etc
油品、酸类等

ANGLED BALL VALVE

斜面上装式球阀



产品型号Product Model: YHQ41S/H.Y.W
公称通径Nominal Diameter: 15~200mm
公称压力Nominal Pressure: 0.6~6.4MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、油、气
Water, oil, gas

WEAR-RESISTING BALL VALVE

耐磨球阀



产品型号Product Model: NQ347TC
公称通径Nominal Diameter: 25~500mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、蒸汽、油品
Water, steam, oil

ECCENTRIC BALL VALVE WITH DECORATIVE TOP

上装式偏心球阀



产品型号Product Model: SQ340H
公称通径Nominal Diameter: 40~1000mm
公称压力Nominal Pressure: 1.0~10.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、蒸汽、油品
Water, steam, oil

BALL VALVES

○ 球阀类



LARGE DIAMETER BURIED WELDING BALL VALVE

大口径埋地焊接球阀

产品型号Product Model:	MQ367F
公称通径Nominal Diameter:	15~1200mm
公称压力Nominal Pressure:	0.6~6.4MPa
适用温度Suitable temperature:	-29°C~180°C
适用介质Suitable Medium:	燃气、煤气 Gas, coal gas



BURIED ALL-WELDED BALL VALVE

埋地式全焊接球阀

产品型号Product Model:	FQ361F
公称通径Nominal Diameter:	50~1200mm
公称压力Nominal Pressure:	1.6~4.0MPa
适用温度Suitable temperature:	-29°C~180°C
适用介质Suitable Medium:	天然气、水、油品 Natural gas, Water, oil



EXTENDED STEM BURIED GAS BALL VALVE

加长阀杆埋地燃气球阀

产品型号Product Model:	Q361F
公称通径Nominal Diameter:	15~200mm
公称压力Nominal Pressure:	1.6~4.0MPa
适用温度Suitable temperature:	-29°C~180°C
适用介质Suitable Medium:	水、空气、天然气 Water, air and antural gas



FULLY WELDED BALL VALVE

全焊接球阀

产品型号Product Model:	Q361F
公称通径Nominal Diameter:	50~1400mm
公称压力Nominal Pressure:	1.6~42.0MPa
适用温度Suitable temperature:	-29°C~180°C
适用介质Suitable Medium:	石油、天然气 Oil, natural gas



BURIED ALL-WELDED BALL VALVE

埋地式全焊球阀

产品型号Product Model:	MQ361F
公称通径Nominal Diameter:	15~1200mm
公称压力Nominal Pressure:	0.6~6.4MPa
适用温度Suitable temperature:	-29°C~180°C
适用介质Suitable Medium:	燃气、煤气 Gas, coal gas



DIRECT BURIAL BALL VALVE WITH VENT PORT

带放散直埋式球阀

产品型号Product Model:	PQ94F/Y/H
公称通径Nominal Diameter:	40~800mm
公称压力Nominal Pressure:	1.0~4.0MPa
适用温度Suitable temperature:	-29°C~425°C
适用介质Suitable Medium:	天然气、水、油品 Natural gas, Water, oil



FULLY WELDED BALL VALVE – SPHERICAL BODY TYPE

全焊接球阀-球型体

产品型号Product Model:	Q961F
公称通径Nominal Diameter:	50~1400mm
公称压力Nominal Pressure:	1.6~42.0MPa
适用温度Suitable temperature:	-29°C~180°C
适用介质Suitable Medium:	石油、天然气 Oil, natural gas



BURIED WELDING BALL VALVE

埋地焊接球阀

产品型号Product Model:	MQ61F
公称通径Nominal Diameter:	50~600mm
公称压力Nominal Pressure:	1.6~6.4MPa
适用温度Suitable temperature:	-29°C~180°C
适用介质Suitable Medium:	天然气、煤气 Natural gas, coal gas

BALL VALVES

○ 球阀类



SHRINK DIAMETER WELDING BALL VALVE

缩径焊接球阀

产品型号Product Model:	Q61F
公称通径Nominal Diameter:	125~600mm
公称压力Nominal Pressure:	1.6~6.4MPa
适用温度Suitable temperature:	-29°C~180°C
适用介质Suitable Medium:	天然气、煤气 Natural gas, coal gas



REDUCED BORE FLANGED BALL VALVE

缩径法兰球阀

产品型号Product Model:	Q41F
公称通径Nominal Diameter:	15~200mm
公称压力Nominal Pressure:	1.6~6.4MPa
适用温度Suitable temperature:	-29°C~180°C
适用介质Suitable Medium:	天然气、煤气 Natural gas, coal gas



REDUCED PORT BUTT-WELD MANUAL BALL VALVE

缩颈焊接手动球阀

产品型号Product Model:	Q61F
公称通径Nominal Diameter:	10~200mm
公称压力Nominal Pressure:	1.6~6.4MPa
适用温度Suitable temperature:	-29°C~180°C
适用介质Suitable Medium:	天然气、煤气 Natural gas, coal gas



THROUGH-HOLE WELDED BALL VALVE

通径焊接球阀

产品型号Product Model:	Q62F
公称通径Nominal Diameter:	15~150mm
公称压力Nominal Pressure:	1.6~6.4MPa
适用温度Suitable temperature:	-29°C~180°
适用介质Suitable Medium:	天然气、煤气 Natural gas, coal gas



THREADED/WELDING BALL VALVE

螺纹/焊接球阀

产品型号Product Model:	Q63F
公称通径Nominal Diameter:	10~50mm
公称压力Nominal Pressure:	1.6~6.4MPa
适用温度Suitable temperature:	-29°C~180°C
适用介质Suitable Medium:	天然气、煤气 Natural gas, coal gas



FULLY WELDED FLANGED BALL VALVE

全焊接法兰球阀

产品型号Product Model:	KDQ341
公称通径Nominal Diameter:	10~600mm
公称压力Nominal Pressure:	1.0~4.0MPa
适用温度Suitable temperature:	-30°C~200°C
适用介质Suitable Medium:	天然气、煤气 Natural gas, coal gas



BURIED TYPE THERMAL INSULATION WELDED BALL VALVE BQ61/7F

埋地式保温焊接球阀 BQ61/7F

应用规范	1、设计、制造按GB12237-89的规定。 2、结构长度按CVA7.1-83的规定。 3、阀门的试验标准按ZBJ16006-90的规定。 4、保温套层的技术要求参照津Q/GY07-01-87的规定。
阀门性能规范	1、工作压力:不大于阀门的公称压力。 2、工作温度:-29°C~250°C 主体材料:WCB、ZH1Cr18Ni9、ZGCr18Ni12Mo2Ti。
Application standard	1. The design, the manufacture according to the provitions of the GB12237-89 2. Structure length CVA7.1-83 according to the regulations. 3. The valve test standard according to the provisions of the ZBJ16006-90 4. Thermal insulation layer with reference to the technical requirements of the tianjin Q/GY07-01-87 rules
VALVE PERFORMANCE STANDARD	1. Working pressure: no greater than the nominal pressure of the valve. 2. Working temperature: -29°C~250°C The main materials:WCB、ZH1Cr18Ni9、ZGCr18Ni12Mo2Ti7 rules

BALL VALVES

○ 球阀类



HYDRAULIC BALL VALVE

液压球阀

产品型号Product Model: YJZQ
公称通径Nominal Diameter: 6~50mm
公称压力Nominal Pressure: 16.0~42.0MPa
适用温度Suitable temperature: -29°C~80°C
适用介质Suitable Medium:
液压、油、水、乙二醇
Hydraulic, oil, water, glycol



HARD SEALING BALL VALVES

硬密封球阀

产品型号Product Model: Q41Y/Q47H
公称通径Nominal Diameter: 50~800mm
公称压力Nominal Pressure: 150~1500Lb
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、油、气、酸类等
Water, oil, gas, acids, etc



HIGH-PRESSURE FORGING STEEL BALL VALVE

高压锻钢球阀

产品型号Product Model: Q41F
公称通径Nominal Diameter: 15~100mm
公称压力Nominal Pressure: 16.0~42.0MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、油、气、酸类等
Water, oil, gas, acid, etc



FORGING STEEL BALL VALVE

锻钢球阀

产品型号Product Model: Q61W
公称通径Nominal Diameter: 1/2"~2"
公称压力Nominal Pressure: 150~600Lb
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、油、气
Water, oil, gas



HIGHT-PRESSURE FORGING STEEL BALL VALVE

高压锻钢球阀

产品型号Product Model: Q41F
公称通径Nominal Diameter: 15~200mm
公称压力Nominal Pressure: 16.0~42.0MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、油、气、酸类等
Water, oil, gas, acid, etc



HIGH-PRESSURE BUTT WELD BALL VALVE

高压对焊球阀

产品型号Product Model: Q71F
公称通径Nominal Diameter: 10~100mm
公称压力Nominal Pressure: 16.0~32.0MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、油、气及某些腐蚀性液体
Water,oil, gas and some corrosive liquid



TWO TYPE HIGH PRESSURE THREADED BALL VALVE

二片式高压内螺球阀

产品型号Product Model: Q11N
公称通径Nominal Diameter: 6~50mm
公称压力Nominal Pressure: 10.0~32.0MPa
适用温度Suitable temperature: -29°C~80°C
适用介质Suitable Medium:
水、油、气及某些腐蚀性液体
Water,oil, gas and some corrosive liquid



FORGING STEEL TRUNNION MOUNTED BALL VALVE

锻钢固定球阀

产品型号Product Model: Q347F/H
公称通径Nominal Diameter: 50~400mm
公称压力Nominal Pressure: 1.60~42.0MPa
适用温度Suitable temperature: -29°C~300°C
适用介质Suitable Medium:
水、油、气等
Water, oil, gas, etc

BUTTERFLY VALVES

○ 蝶阀类



FLANGE HARD SEALING BUTTERFLY VALVE

法兰式硬密封蝶阀

产品型号Product Model: D343H
公称通径Nominal Diameter: 50~1200mm
公称压力Nominal Pressure: 0.6~4.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
蒸气、油品、酸类、海水等
Steam, oil acid, sea water, etc



BUTT IN THREE ECCENTRIC MULTI-LEVEL HARD SEALING BUTTERFLY VALVE

对焊式三偏心多层次硬密封蝶阀

产品型号Product Model: D363H
公称通径Nominal Diameter: 50~2000mm
公称压力Nominal Pressure: 1.0~4.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、热空气、煤气、油品、天然气等
Water, hot air,steam, gas, Oil natural gas



WORM GEAR BUTTERFLY VALVE FLANGE TYPE

蜗轮传动蝶阀法兰型

产品型号Product Model: D343H
公称通径Nominal Diameter: 100~1000mm
公称压力Nominal Pressure: 2.5~4.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
煤气、含尘气体、烟道气等
Gas, dust-contained gas, such as black



PNEUMATIC FLANGE HARD SEALING BUTTERFLY VALVE

气动法兰式硬密封蝶阀

产品型号Product Model: D673H
公称通径Nominal Diameter: 50~1200mm
公称压力Nominal Pressure: 0.6~2.5MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、空气、天然气、油品及弱腐蚀性流体
Water,air,gas,oil and Weak corrosive fluids



TRIPLE ECCENTRIC MULTI-LEVEL HARDSEALING BUTTERFLY VALVE

对夹式三偏心多层次硬密封蝶阀

产品型号Product Model: D373H
公称通径Nominal Diameter: 50~2000mm
公称压力Nominal Pressure: 0.6~4.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、空气、天然气、油品及弱腐蚀性流体
Water,air,gas,oil and Weak corrosive fluids



FLANGE TELESCOPIC BUTTERFLY VALVE

法兰式伸缩蝶阀

产品型号Product Model: SD343H/F/X
公称通径Nominal Diameter: 50~2000mm
公称压力Nominal Pressure: 0.6~1.6MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、油品、空气等
Water. oil. air, etc



FLANGE TYPE VENTILATION BUTTERFLY VALVE

法兰式通风蝶阀

产品型号Product Model: D343W/H
公称通径Nominal Diameter: 50~2000mm
公称压力Nominal Pressure: 0.05~0.6MPa
适用温度Suitable temperature: -29°C~300°C
适用介质Suitable Medium:
煤气、含尘气体、烟道气等
Gas, dust-contained gas, such as black




EXTENDED FLANGE HARD SEALING BUTTERFLY VALVE

加长法兰式硬密封蝶阀

产品型号Product Model: D343H
公称通径Nominal Diameter: 50~2000mm
公称压力Nominal Pressure: 0.6~2.5MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、空气、天然气、油品及弱腐蚀性流体
Water,air,gas,oiland Weak corrosive fluids

BUTTERFLY VALVES

○ 蝶阀类



STAINLESS STEEL HANDLE WAFER BUTTERFLY VALVES

不锈钢手柄对夹式蝶阀

产品型号Product Model: D71X
公称通径Nominal Diameter: 50~150mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: -40°C~80°C
适用介质Suitable Medium:
水、油品、气体等
Water, oil, gas, etc



WORM FULL STAINLESS STEEL LUG BUTTERFLY VALVE

蜗轮对夹式全不锈钢蝶阀

产品型号Product Model: D371F
公称通径Nominal Diameter: 40~1200mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
耐酸、碱、海水、污水、油、气等
Acid,alkali, sea water, sewage,oil, gas and other



WORM GEAR FLANGED BUTTEFLY VALVE

蜗轮法兰蝶阀

产品型号Product Model: D341X
公称通径Nominal Diameter: 50~1400mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: -40°C~80°C
适用介质Suitable Medium:
水、油品、气体等
Water, oil, gas, etc



CENTRAL LINE BUTTERFLY VALVE

对夹式中线蝶阀

产品型号Product Model: D37A1X
公称通径Nominal Diameter: 50~1200mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: -40°C~80°C
适用介质Suitable Medium:
水、空气、油等
Water, air, oil, etc



FIRE CONTROL SIGNAL BUTTERFLY VALVE

消防信号蝶阀

产品型号Product Model: D371X
公称通径Nominal Diameter: 50~350mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: -40°C~80°C
适用介质Suitable Medium:
水、油品、气体等
Water, oil, gas, etc



WORM GEAR WAFER STAINLESS STEEL PLATE FLUORINE LINING BUTTERFLY VALVE

蜗轮对夹式不锈钢板衬氟蝶阀

产品型号Product Model: D371F
公称通径Nominal Diameter: 40~2000mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
酸、碱、海水、污水、气、油品等
Acid,alkali, sea water, sewage, gas, oil etc



MIDLINE BUTTERFLY VALVE

中线蝶阀

产品型号Product Model: D371X
公称通径Nominal Diameter: 40~600mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: -40°C~80°C
适用介质Suitable Medium:
耐酸、碱、海水、污水、油、气等
Acid,alkali, sea water, sewage,oil, gas and other



PIPE NETWORK FLANGED BUTTERFLY VALVE

管网法兰蝶阀

产品型号Product Model: D341X
公称通径Nominal Diameter: 40~1200mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: -40°C~80°C
适用介质Suitable Medium:
水、气、油品等
Water, gas, oil, etc



HIGH-PERFORMANCE LUG BUTTERFLY VALVE

高性能凸耳蝶阀

产品型号Product Model: D372Y
公称通径Nominal Diameter: 50~500mm
公称压力Nominal Pressure: 1.0~2.5MPa
适用温度Suitable temperature: -29°C~420°C
适用介质Suitable Medium:
水、油、气等
water, oil, gas, etc



STORAGE TANK HYDRAULIC CONTROLLED SLOWLY-CLOSINGCHECK BUTTERFLY VALVE

蓄能罐式液控缓闭止回蝶阀

产品型号Product Model: DX7K41X/H
公称通径Nominal Diameter: 100~4000mm
公称压力Nominal Pressure: 0.25~1.0MPa
适用温度Suitable temperature: -29°C~80°C
适用介质Suitable Medium:
X密封:水、油品及其它腐蚀性液体
H密封:煤气、蒸汽及其它废气
X seat water, oil and other corrosion sex liquid,
H seat the gas, steam and other waste gas



FLANGE GATE VALVE

法兰闸阀

产品型号Product Model: Z41H
公称通径Nominal Diameter: 15~800mm
公称压力Nominal Pressure: 10.0~25.0MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
液体、气体
Liquid,gas



LARGE DIAMETER GATE VALVES

大口径闸阀

产品型号Product Model: Z541H/Y
公称通径Nominal Diameter: 300~2000mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、油品、蒸汽、酸性介质等
Water,oil,steam,acid medium etc



BEVEL GEAR GATE VALVES

伞齿轮闸阀

产品型号Product Model: Z541H
公称通径Nominal Diameter: 15~1000mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、油品、蒸汽、酸性介质等
Water,oil,steam,acid medium etc



STAINLESS STEEL GATE VALVES

不锈钢闸阀

产品型号Product Model: Z41W
公称通径Nominal Diameter: 15~800mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~350°C
适用介质Suitable Medium:
水、油品、蒸汽、酸、碱、氨、尿素、含硫天然气等
Water,oil,steam,and acid,alkali,Ammonia, urea,sulfur natural gas



AMERICAN STANDARD FLANGE GATE VALVES

美标法兰闸阀

产品型号Product Model: Z40H
公称通径Nominal Diameter: 15~800mm
公称压力Nominal Pressure: 150~900LB
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
液体、气体
Liquid, gas



SINCE THE HERMETIC SEAL GATE VALVES

自密封盖闸阀

产品型号Product Model: YZ540H/Y
公称通径Nominal Diameter: 6"~16"mm
公称压力Nominal Pressure: 2500Lb
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、油品、蒸汽、酸碱
Water,oil,steam,alkalic

GATE VALVES

○ 闸阀类



LOW TEMPERATURE STAINLESS STEEL GATE VALVES

不锈钢低温闸阀

产品型号Product Model:	DZ41Y
公称通径Nominal Diameter:	15~1200mm
公称压力Nominal Pressure:	1.0~6.4MPa
适用温度Suitable temperature:	-196℃~300℃
适用介质Suitable Medium:	天然气、液氨 Natural gas, liquid ammonia



Z2 IMITATION SERIES GATE VALVE WITH BLOW-OFF HOLES

Z2仿系列带吹扫孔闸阀

产品型号Product Model:	Z2仿Z41H/Y
公称通径Nominal Diameter:	50~400mm
公称压力Nominal Pressure:	1.6~10.0MPa
适用温度Suitable temperature:	-29℃~550℃
适用介质Suitable Medium:	水、蒸汽、烟气、油品或含雾状、粉末状、颗粒状等的介质 Water, steam, flue gas, oil or medium containing mist, powder, granules and the like



VACUUM ISOLATION VALVES

真空隔离阀

产品型号Product Model:	NKZ41H/NKZ44H/NKZ944H/NKZ941H
公称通径Nominal Diameter:	15~1200mm
公称压力Nominal Pressure:	1.0~10.0MPa
适用温度Suitable temperature:	-29℃~550℃
适用介质Suitable Medium:	水、蒸汽 Water, steam, etc



GATE VALVES

苏式闸阀

产品型号Product Model:	Z41W
公称通径Nominal Diameter:	10~1000mm
公称压力Nominal Pressure:	1.6~16.0MPa
适用温度Suitable temperature:	-29℃~600℃
适用介质Suitable Medium:	水、石油、天然气等 Water, oil, steam, acid medium etc



BELLOWS GATE VALVES

波纹管闸阀

产品型号Product Model:	WZ41H/Y
公称通径Nominal Diameter:	50~450mm
公称压力Nominal Pressure:	1.0~1.6MPa
适用温度Suitable temperature:	-29℃~425℃
适用介质Suitable Medium:	水、油品、蒸汽 Water, steam, etc



INSULATION GATE VALVES

保温闸阀

产品型号Product Model:	BZ41W、BZ41Y
公称通径Nominal Diameter:	50~300mm
公称压力Nominal Pressure:	1.6~6.4MPa
适用温度Suitable temperature:	-29℃~425℃
适用介质Suitable Medium:	酸类、碱类 Acid, alkali class



BEVEL GEAR WELDING GATE VALVES

正伞齿轮焊接闸阀

产品型号Product Model:	Z460Y
公称通径Nominal Diameter:	50~600mm
公称压力Nominal Pressure:	1.0~32.0MPa
适用温度Suitable temperature:	-29℃~600℃
适用介质Suitable Medium:	水、蒸汽、油 Water, steam, oil



HIGH TEMPERATURE HIGH PRESSURE WELDING GATE VALVES

高温高压焊接闸阀

产品型号Product Model:	Z60Y、Z61Y
公称通径Nominal Diameter:	50~225mm
公称压力Nominal Pressure:	25.0~32.0MPa
适用温度Suitable temperature:	-29℃~600℃
适用介质Suitable Medium:	水、蒸汽、油 Water, steam, oil

GATE VALVES

○ 闸阀类



NON-RISING GATE VALVES

暗杆闸阀

产品型号Product Model:	Z45H
公称通径Nominal Diameter:	50~1000mm
公称压力Nominal Pressure:	1.6~4.0MPa
适用温度Suitable temperature:	-29℃~300℃
适用介质Suitable Medium:	水、蒸汽、油 Water, steam, oil



WEDGE TYPE NON-RISING GATE VALVES

楔式暗杆闸阀

产品型号Product Model:	Z45X
公称通径Nominal Diameter:	50~1000mm
公称压力Nominal Pressure:	1.0~1.6MPa
适用温度Suitable temperature:	≤120℃
适用介质Suitable Medium:	水、蒸汽、油 Water, steam, oil



MEDIUM VOLTAGE FLAT GATE VALVE

中压平板闸阀

产品型号Product Model:	Z43WF
公称通径Nominal Diameter:	50~800mm
公称压力Nominal Pressure:	1.0~16.0MPa
适用温度Suitable temperature:	-29℃~220℃
适用介质Suitable Medium:	水、石油、天然气、蒸汽 Water, oil, natural gas, steam



DIVERSION HOLE PARALLEL TYPE GATE VALVES

导流孔平行式闸阀

产品型号Product Model:	Z43F
公称通径Nominal Diameter:	50~800mm
公称压力Nominal Pressure:	1.6MPa
适用温度Suitable temperature:	-29℃~220℃
适用介质Suitable Medium:	水、石油、天然气 Water, oil, natural gas



GAS FLATE GATE VALVE

燃气平板闸阀

产品型号Product Model:	Z47F
公称通径Nominal Diameter:	25~1000mm
公称压力Nominal Pressure:	1.0~6.4MPa
适用温度Suitable temperature:	-29℃~220℃
适用介质Suitable Medium:	石油、天然气 oil, natural gas



GAS GATE VALVES

燃气闸阀

产品型号Product Model:	(K)Z4(6)7F(H)
公称通径Nominal Diameter:	25~1000mm
公称压力Nominal Pressure:	1.6~6.4MPa
适用温度Suitable temperature:	-29℃~220℃
适用介质Suitable Medium:	油、天然气、水等非腐蚀性介质 Oil, natural gas, water and the corrosion Sex medium



HIGH PRESSURE GAS FLAT VALVE

高压燃气平板闸阀

产品型号Product Model:	Z547F
公称通径Nominal Diameter:	25~1000mm
公称压力Nominal Pressure:	1.6~15MPa
适用温度Suitable temperature:	-29℃~220℃
适用介质Suitable Medium:	石油、天然气 oil, natural gas



SECURITY GATE VALVES

防盗闸阀

产品型号Product Model:	fdz45h
公称通径Nominal Diameter:	40~300mm
公称压力Nominal Pressure:	1.6~2.5MPa
适用温度Suitable temperature:	-29℃~425℃
适用介质Suitable Medium:	水、油品、蒸汽 Water, oil, steam

GLOBE VALVES

○ 截止阀类



GB FLANGE GLOBE VALVE

国标法兰截止阀

产品型号Product Model: J41H
公称通径Nominal Diameter: 15~800mm
公称压力Nominal Pressure: 1.6~16.0MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、油品、蒸汽等
Water,oil,steam etc



FORGING STEEL GLOBE VALVE

锻钢截止阀

产品型号Product Model: J41H/Y
公称通径Nominal Diameter: 10~100mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、油品、蒸汽、酸性介质等
Water, oil,steam, acid medium etc



STAINLESS STEEL FLANGE GLOBE VALVE

不锈钢法兰截止阀

产品型号Product Model: J41W/Y
公称通径Nominal Diameter: 15~800mm
公称压力Nominal Pressure: 1.6~10.0MPa
适用温度Suitable temperature: -196°C~600°C
适用介质Suitable Medium:
液体、气体
Liquid, gas



ANGLE GLOBE VALVES

角式截止阀

产品型号Product Model: J44W
公称通径Nominal Diameter: 10~100mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -196°C~600°C
适用介质Suitable Medium:
水、油品、蒸汽、酸性介质等
Water,oil,steam,acid medium etc



STAINLESS STEEL BEVEL GEAR GLOBE VALVE

不锈钢伞齿轮截止阀

产品型号Product Model: J541W
公称通径Nominal Diameter: 50~800mm
公称压力Nominal Pressure: 1.6~16MPa
适用温度Suitable temperature: -196°C~600°C
适用介质Suitable Medium:
硝酸类
Nitric acid kind



BUTT-WELDED GLOBE VALVE

焊接截止阀

产品型号Product Model: J61W
公称通径Nominal Diameter: 15~100mm
公称压力Nominal Pressure: 1.0~6.4MPa
适用温度Suitable temperature: -29°C~250°C
适用介质Suitable Medium:
水、油品、蒸汽、酸性介质等
Water,oil,steam,acid medium etc



API AMERICAN STANDARD STAINLESS STEEL GLOBE VALVE

API美标不锈钢截止阀

产品型号Product Model: J41W
公称通径Nominal Diameter: 1 1/2"-16"
公称压力Nominal Pressure: 150-600MPa
适用温度Suitable temperature: -196°C~600°C
适用介质Suitable Medium:
水、油品、蒸汽等
Water,oil,steam etc



BUTT-WELDED GLOBE VALVE

焊接截止阀

产品型号Product Model: J965Y
公称通径Nominal Diameter: 10~100mm
公称压力Nominal Pressure: 150~3500Lb
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、蒸汽等
Water,steam,etc

GLOBE VALVES

○ 截止阀类



WELDING TYPE WATER SEAL GLOBE VALVE

焊接式水封截止阀

产品型号Product Model: DS/J61H
公称通径Nominal Diameter: 10~100mm
公称压力Nominal Pressure: 2.5~4.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、蒸汽、非腐蚀性气体等
Water, steam, the corrosive gas etc



LOW TEMPERATURE GLOBE VALVE

低温截止阀

产品型号Product Model: DJ41W
公称通径Nominal Diameter: 50~300mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: ≥-196°C
适用介质Suitable Medium:
水、蒸汽、油品、硝酸、尿素
Water ,steam, oil products,nitric acid, urea



FORGING STEEL GLOBE VALVES AT LOW TEMPERATURE

锻钢低温截止阀

产品型号Product Model: DJ61Y
公称通径Nominal Diameter: 10~50mm
公称压力Nominal Pressure: 800LB
适用温度Suitable temperature: ≥-196°C
适用介质Suitable Medium:
水、油品、蒸汽
Water,oil,steam



THE WHOLE FORGING HIGH PRESSURE GLOBE VALVE

整体锻造法兰角式截止阀

产品型号Product Model: JY44W
公称通径Nominal Diameter: 15~300mm
公称压力Nominal Pressure: 1.6~42MPa
适用温度Suitable temperature: -196°C~600°C
适用介质Suitable Medium:
水、蒸汽
Water,steam



THE VENT VALVE THROTTLING

节流截止放空阀

产品型号Product Model: FJ41Y
公称通径Nominal Diameter: 15~300mm
公称压力Nominal Pressure: 1.6~16MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
石油、天然气
Oil, natural gas



MANUAL ANSI STANDARD GLOBE VALVE

手动美标截止阀

产品型号Product Model: J41W
公称通径Nominal Diameter: 1/2"-8"
公称压力Nominal Pressure: 150~300Lb
适用温度Suitable temperature: -196°C~600°C
适用介质Suitable Medium:
水、油品、蒸汽
Water,oil products,steam



SLEEVE-TYPE DRAIN VALVE

阀套式排污阀

产品型号Product Model: TP41Y
公称通径Nominal Diameter: 15~300mm
公称压力Nominal Pressure: 1.6~16MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
石油、天然气
Oil, natural gas



VACUUM GLOBE VALVE

真空截止阀

产品型号Product Model: JK41H/Y
公称通径Nominal Diameter: 50~350mm
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、蒸汽
Water,steam

GLOBE VALVES

○ 截止阀类

FLANGE PISTON VALVE

法兰柱塞阀



产品型号Product Model:	U41SM
公称通径Nominal Diameter:	15~300mm
公称压力Nominal Pressure:	1.6~2.5MPa
适用温度Suitable temperature:	-29°C~600°C
适用介质Suitable Medium:	水、油品、蒸汽 Water,oilproducts,steam

THREADED PISTON VALVE

内螺纹柱塞阀



产品型号Product Model:	U11SFM
公称通径Nominal Diameter:	15~300mm
公称压力Nominal Pressure:	1.6~4.0MPa
适用温度Suitable temperature:	-29°C~425°C
适用介质Suitable Medium:	水、油品、蒸汽 Water,oil products,steam

ENERGY-SAVING PISTON VALVE

节能柱塞阀



产品型号Product Model:	U41SM
公称通径Nominal Diameter:	15~300mm
公称压力Nominal Pressure:	1.6~2.5MPa
适用温度Suitable temperature:	-29°C~425°C
适用介质Suitable Medium:	水、油品、蒸汽 Water,oilproducts,steam

PISTON VALVE

柱塞阀



产品型号Product Model:	UJ41SM
公称通径Nominal Diameter:	50~500mm
公称压力Nominal Pressure:	1.0~1.6MPa
适用温度Suitable temperature:	-29°C~425°C
适用介质Suitable Medium:	水、油品、蒸汽 Water,oil products,steam

GAS CUT-OFF VALVE

燃气截止阀



产品型号Product Model:	J41N
公称通径Nominal Diameter:	15~800mm
公称压力Nominal Pressure:	1.6~4.0MPa
适用温度Suitable temperature:	-29°C~80°C
适用介质Suitable Medium:	天然气、液化石油气等 Natural gas,liquetied petro-laum gas, etc

GAS JIS GLOBE VALVE

燃气日式截止阀



产品型号Product Model:	JY41F
公称通径Nominal Diameter:	15~200mm
公称压力Nominal Pressure:	1.6~4.0MPa
适用温度Suitable temperature:	-29°C~220°C
适用介质Suitable Medium:	煤气、天然气及液化石油气 Coal gas, natural gas and liquid stone oil, gas

HYDRAULIC EMERGENCY CUT-OFF VALVE

液动紧急切断阀



产品型号Product Model:	QDY421F
公称通径Nominal Diameter:	15~200mm
公称压力Nominal Pressure:	1.6~4.0MPa
适用温度Suitable temperature:	-29°C~150°C
适用介质Suitable Medium:	天然气、液化气、液氨 Natural gas, liquefied petrol-eumgas, liquid ammonia

GAS EMERGENCY CUT-OFF VALVE

燃气紧急切断阀



产品型号Product Model:	ZCRB
公称通径Nominal Diameter:	15~350mm
公称压力Nominal Pressure:	1.6~4.0MPa
适用温度Suitable temperature:	-29°C~220°C
适用介质Suitable Medium:	煤气、天然气及液化石油气 Coal gas, natural gas and liquid stone oil, gas

CHECK VALVES

○ 止回阀类

LIFT CHECK VALVE

升降式止回阀



产品型号Product Model:	H41W/H
公称通径Nominal Diameter:	15~200mm
公称压力Nominal Pressure:	1.0~16.0MPa
适用温度Suitable temperature:	-196°C~600°C
适用介质Suitable Medium:	水、蒸气、油品、其他腐蚀性介质 Water, steam, oil products, other corruption Erosion media

HYDROSTATIC TEST VALVES (PLUG VALVE)

水压试验阀(堵阀)



产品型号Product Model:	SY60X
公称通径Nominal Diameter:	6"~36"
公称压力Nominal Pressure:	600~2500Lb
适用温度Suitable temperature:	-40°C~80°C
适用介质Suitable Medium:	水、蒸气等 Water steam, etc

SWING CHECK VALVE

旋启式止回阀



产品型号Product Model:	H44H/Y
公称通径Nominal Diameter:	25~125mm
公称压力Nominal Pressure:	1.6~16MPa
适用温度Suitable temperature:	-29°C~600°C
适用介质Suitable Medium:	水、蒸气等 Water steam, etc

VERTICAL CHECK VALVE

立式止回阀



产品型号Product Model:	H42W/H
公称通径Nominal Diameter:	15~200mm
公称压力Nominal Pressure:	1.6~4.0MPa
适用温度Suitable temperature:	-196°C~600°C
适用介质Suitable Medium:	水、蒸气、油品、其他腐蚀性介质 Water,steam, oil products, other corruption Erosion media

BALL TYPE CHECK VALVE

球型止回阀



产品型号Product Model:	HQ41X
公称通径Nominal Diameter:	15~600mm
公称压力Nominal Pressure:	1.6~16MPa
适用温度Suitable temperature:	-29°C~100°C
适用介质Suitable Medium:	水、油、气等 Water, oil, gas, etc

H72 WAFER CHECK VALVE

H72对夹式止回阀



产品型号Product Model:	H71W/H
公称通径Nominal Diameter:	15~300mm
公称压力Nominal Pressure:	1.6~4.0MPa
适用温度Suitable temperature:	-29°C~600°C
适用介质Suitable Medium:	油、水、酸碱等液体 Oil, water and soda acid liquid

AMERICAN STANDARD CHECK VALVE

美标止回阀



产品型号Product Model:	H44W
公称通径Nominal Diameter:	2"~16"
公称压力Nominal Pressure:	150~900Lb
适用温度Suitable temperature:	-196°C~600°C
适用介质Suitable Medium:	水、蒸气、油品、其他腐蚀性介质 Water,steam, oil products, other corruption Erosion media

SUPER SLIM CHECK VALVE

超薄型止回阀



产品型号Product Model:	H74W/H
公称通径Nominal Diameter:	40~400mm
公称压力Nominal Pressure:	1.6~2.5MPa
适用温度Suitable temperature:	-29°C~600°C
适用介质Suitable Medium:	油、水、酸碱等液体 Oil, water and soda acid liquid

CHECK VALVES

○ 止回阀类



ANSI STANDARD BUTTERFLY CHECK VALVE

美标蝶式止回阀

产品型号Product Model: H76H/W
公称通径Nominal Diameter: 50~600mm
公称压力Nominal Pressure: 1.0~4.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、蒸气、油品、其他腐蚀性介质
Water, steam, oil product, sother corruption
Erosion media



POWER STATION CHECK VALVE

电站止回阀

产品型号Product Model: H64H/Y
公称通径Nominal Diameter: 2"~24"
公称压力Nominal Pressure: 600~2500Lb
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、蒸气
Water, steam



BOTTOM VALVE

底阀

产品型号Product Model: H12W/H H42
公称通径Nominal Diameter: 15~600mm
公称压力Nominal Pressure: 1.0~2.5MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、蒸气、油品、其他腐蚀性介质
Water, steam, oil products, other corruption
Erosion media



INCLINED DISC CHECK VALVE

斜盘式止回阀

产品型号Product Model: PXH44H
公称通径Nominal Diameter: 2"~24"
公称压力Nominal Pressure: 150~600LB
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、油、气等
Water, oil, gas, etc



SWING CHECK VALVES

旋启式止回阀

产品型号Product Model: H44H
公称通径Nominal Diameter: 15~500mm
公称压力Nominal Pressure: 1.6~2.5MPa
适用温度Suitable temperature: -196°C~600°C
适用介质Suitable Medium:
水、油品、蒸汽等
Water, oil, steam, etc



LIE DOWN AND MADE THE CHECK VALVE

立卧两用止回阀

产品型号Product Model: H41/2H
公称通径Nominal Diameter: 15~300mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、油品、蒸汽等
Water, oil, steam, etc



SWING CHECK VALVE

抽气止回阀

产品型号Product Model: H664H
公称通径Nominal Diameter: 18"~42"
公称压力Nominal Pressure: 150~600Lb
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、蒸气
Water, steam



POWER STATION CHECK VALVE

电站止回阀

产品型号Product Model: H61Y
公称通径Nominal Diameter: 10~600mm
公称压力Nominal Pressure: 25.0~32.0MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、蒸气、油品
Water, steam, oil

OIL VALVES

○ 油田阀类



WELDED PARALLEL GATE VALVE

焊接式平行闸阀

产品型号Product Model: Z63Y
公称通径Nominal Diameter: 25~150mm
公称压力Nominal Pressure: 16.0~40.0MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、油品、天然气
Water, oil and natural gas



KARD PARALLEL GATE VALVE

卡套式平行闸阀

产品型号Product Model: Z83Y
公称通径Nominal Diameter: 25~150mm
公称压力Nominal Pressure: 16.0~60.0MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、油品、天然气、泥浆
Water, oil, natural gas, mud



PARALLEL TYPE GATE VALVES

平行式闸阀

产品型号Product Model: Z43Y
公称通径Nominal Diameter: 25~200mm
公称压力Nominal Pressure: 16.0~40.0MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、油品、天然气、泥浆
Water, oil, natural gas, mud



BALANCED THROTTLING GLOBE VALVE

平衡式节流截止阀

产品型号Product Model: J46Y
公称通径Nominal Diameter: 25~200mm
公称压力Nominal Pressure: 16.0~35.0MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、油品、天然气
Water, oil and natural gas



CLAMP THROTTLE GLOBE VALVE

卡箍式节流截止阀

产品型号Product Model: L86Y、J8B6Y
公称通径Nominal Diameter: 25~150mm
公称压力Nominal Pressure: 16.0~35.0MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、油品、天然气
Water, oil and natural gas



BALANCED MULTIPURPOSE GLOBE VALVE

平衡式多用途截止阀

产品型号Product Model: J86Y
公称通径Nominal Diameter: 25~150mm
公称压力Nominal Pressure: 16.0~35.0MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、油品、天然气
Water, oil and natural gas



HIGH PRESSURE REGULATION ANGLE TYPE GLOBE VALVE

高压调节角式截止阀

产品型号Product Model: LJ67Y
公称通径Nominal Diameter: 25~150mm
公称压力Nominal Pressure: 16.0~45.0MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、油品
Water, oil



CLAMP CHECK VALVE, HIGH PRESSURE CHECK VALVE

卡箍止回阀、高压止回阀

产品型号Product Model: H82H、HG81A
公称通径Nominal Diameter: 25~200mm
公称压力Nominal Pressure: 16.0~40.0MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、油品
Water, oil

FORGED VALVES

○ 锻钢阀类

FORGED STEEL GATE VALVE



锻钢闸阀

产品型号Product Model: Z41W
公称通径Nominal Diameter: 10~50mm
公称压力Nominal Pressure: 1.6~42.0MPa
适用温度Suitable temperature: -196°C~600°C
适用介质Suitable Medium:
水、蒸气、油品
Water, steam, oil

VENT VALVE GUIDE POUR



放空导淋阀

产品型号Product Model: Z41W
公称通径Nominal Diameter: 10~50mm
公称压力Nominal Pressure: 1.6~42.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、石油、天然气等
Water, oil, natural gas, etc

ANSI STANDARD FORGED STEEL GATE VALVE



美标锻钢闸阀

产品型号Product Model: Z41
公称通径Nominal Diameter: 3/8"~2"
公称压力Nominal Pressure: 150~2500Lb
适用温度Suitable temperature: -196°C~600°C
适用介质Suitable Medium:
水、石油、天然气等
Water, oil, natural gas, etc

FORGED STEEL GLOBE VALVES



锻钢截止阀

产品型号Product Model: J11H/Y
公称通径Nominal Diameter: 15~50mm
公称压力Nominal Pressure: 150~2500Lb
适用温度Suitable temperature: -196°C~600°C
适用介质Suitable Medium:
水、蒸气、油品、腐蚀性介质等
Water, steam, oil products, corrosive, etc

FORGED STEEL GLOBE VALVES



锻钢截止阀

产品型号Product Model: J41H/Y
公称通径Nominal Diameter: 15~50mm
公称压力Nominal Pressure: 1.6~42.0MPa
适用温度Suitable temperature: -196°C~600°C
适用介质Suitable Medium:
水、油品、蒸汽、酸性介质等
Water, oil, steam acid medium etc

FORGING STEEL FLANGE CHECK VALVE



锻钢法兰止回阀

产品型号Product Model: H41H/W
公称通径Nominal Diameter: 15~200mm
公称压力Nominal Pressure: 2.5~10.0MPa
适用温度Suitable temperature: -196°C~600°C
适用介质Suitable Medium:
水、蒸气、油品、其他腐蚀性介质
Water, steam, oil products, other corruption
Erosion media

FORGING STEEL LIFT CHECK VALVE



锻钢升降式止回阀

产品型号Product Model: H61H
公称通径Nominal Diameter: 10~50mm
公称压力Nominal Pressure: 1.0~16.0MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、油品、蒸气
Water, oil, steam

FORGING STEEL SWING CHECK VALVE



锻钢旋启式止回阀

产品型号Product Model: H64W
公称通径Nominal Diameter: 15mm
公称压力Nominal Pressure: 1.0~16.0MPa
适用温度Suitable temperature: -196°C~600°C
适用介质Suitable Medium:
水、蒸气、油品
Water, steam, oil

KINFE GATE VALVE SERIES

○ 刀闸阀系列



KINFE GATE VALVES

○ 刀閘閥類



MANUAL KNIFE GATE VALVES

手动刀型閘閥

产品型号Product Model:	PFZ73
公称通径Nominal Diameter:	50~2000mm
公称压力Nominal Pressure:	0.6~2.5MPa
适用温度Suitable temperature:	≤425°C
适用介质Suitable Medium:	纸浆、污水、煤浆、泥浆 Pulp, sewage, coal slurry, mud



MANUAL SLURRY VALVES

手动浆液閥

产品型号Product Model:	Z73X
公称通径Nominal Diameter:	50~1000mm
公称压力Nominal Pressure:	0.6~2.5MPa
适用温度Suitable temperature:	-29°C~120°C
适用介质Suitable Medium:	纸浆、污水、煤浆、泥浆 Pulp, sewage, coal slurry, mud



MANUAL SINGLE CLIP KNIFE GATE VALVES

手动单夹式刀型閘閥

产品型号Product Model:	PZ43H
公称通径Nominal Diameter:	50~1400mm
公称压力Nominal Pressure:	0.6~2.5MPa
适用温度Suitable temperature:	≤425°C
适用介质Suitable Medium:	纸浆、污水、煤浆 Pulp, sewage, coal slurry



MANUAL SPIRAL GATE VALVES

手动螺旋閘閥

产品型号Product Model:	QDZM-X
公称通径Nominal Diameter:	200×200-700×700mm
阀体材质Nominal Pressure:	铸钢、不锈钢
适用温度Suitable temperature:	-29°C~120°C
适用介质Suitable Medium:	污水、给排水 Sewage, water supply and drainage



CHAIN TRANSMISSION KNIFE GATE VALVE

链轮传动刀型閘閥

产品型号Product Model:	PZL43
公称通径Nominal Diameter:	50~2000mm
公称压力Nominal Pressure:	0.6~2.5MPa
适用温度Suitable temperature:	≤425°C
适用介质Suitable Medium:	纸浆、污水、煤浆、泥浆 Pulp, sewage, coal slurry, mud



FLUID MOVING KNIFE GATE VALVE

液动刀型閘閥

产品型号Product Model:	PZ773
公称通径Nominal Diameter:	50~2000mm
公称压力Nominal Pressure:	0.6~2.5MPa
适用温度Suitable temperature:	≤425°C
适用介质Suitable Medium:	纸浆、污水、煤浆、泥浆 Pulp, sewage, coal slurry, mud



BEVEL GEAR TRANSMISSION KNIFE GATE VALVES

伞齿轮传动刀型閘閥

产品型号Product Model:	PZ575
公称通径Nominal Diameter:	50~2000mm
公称压力Nominal Pressure:	0.6~2.5MPa
适用温度Suitable temperature:	≤425°C
适用介质Suitable Medium:	纸浆、污水、煤浆、泥浆 Pulp, sewage, coal slurry, mud



PNEUMATIC SLURRY VALVES

气动浆液閥

产品型号Product Model:	Z673X
公称通径Nominal Diameter:	50~1000mm
公称压力Nominal Pressure:	1.6~2.5MPa
适用温度Suitable temperature:	80°C
适用介质Suitable Medium:	水 Water

KINFE GATE VALVES

○ 刀閘閥類



PNEUMATIC KNIFE GATE VALVES

气动刀型閘閥

产品型号Product Model:	PZ643
公称通径Nominal Diameter:	50~2000mm
公称压力Nominal Pressure:	0.6~2.5MPa
适用温度Suitable temperature:	≤425°C
适用介质Suitable Medium:	纸浆、污水、煤浆、泥浆 Pulp, sewage, coal slurry, mud



ELECTRIC SLURRY VALVES

电动浆液閥

产品型号Product Model:	Z973X
公称通径Nominal Diameter:	50~1200mm
公称压力Nominal Pressure:	0.6~1.0MPa
适用温度Suitable temperature:	-29°C~120°C
适用介质Suitable Medium:	泥浆、煤渣、纸浆、粮浆、粒状物 The mud, cinders, pulp grain pulp, Granular things



ELECTRIC KNIFE GATE VALVE

电动刀型閘閥

产品型号Product Model:	PZ973
公称通径Nominal Diameter:	50~2000mm
公称压力Nominal Pressure:	0.6~2.5MPa
适用温度Suitable temperature:	≤425°C
适用介质Suitable Medium:	纸浆、污水、煤浆、泥浆 Pulp, sewage, coal slurry, mud



ELECTRIC HYDRAULIC KNIFE GATE VALVES

电液刀型閘閥

产品型号Product Model:	PZ243
公称通径Nominal Diameter:	50~2000mm
公称压力Nominal Pressure:	0.6~2.5MPa
适用温度Suitable temperature:	≤425°C
适用介质Suitable Medium:	纸浆、污水、煤浆、泥浆 Pulp, sewage, coal slurry, mud



PNEUMATIC KNIFE GATE VALVES

气动刀型閘閥

产品型号Product Model:	PZ673
公称通径Nominal Diameter:	50~1400mm
公称压力Nominal Pressure:	0.6~2.5MPa
适用温度Suitable temperature:	≤425°C
适用介质Suitable Medium:	污水、煤浆、灰、渣水混和物 Sewage, coal slurry, ash and slag water blending things



CERAMIC DISCHARGE VALVE

陶瓷出料閥

产品型号Product Model:	Z674TC
公称通径Nominal Diameter:	50~350mm
公称压力Nominal Pressure:	0.6~1.6MPa
适用温度Suitable temperature:	-29°C~425°C
适用介质Suitable Medium:	干灰、粉煤及固体颗粒 Dry ash, and adding solid particles



CARD CHECK VALVE HOOP, AND HIGH PRESSURE CHECK VALVE

气动陶瓷单閘板閥

产品型号Product Model:	Z643TC
公称通径Nominal Diameter:	50~300mm
公称压力Nominal Pressure:	0.6~1.6MPa
适用温度Suitable temperature:	≤200°C
适用介质Suitable Medium:	煤粉、煤粉灰、水泥 FenHui pulverized coal, coal, cement



PNEUMATIC CERAMIC DOUBLE GATE VALVES

气动陶瓷双閘板閥

产品型号Product Model:	Z644TC
公称通径Nominal Diameter:	40~300mm
公称压力Nominal Pressure:	1.0~2.5MPa
适用温度Suitable temperature:	-29°C~425°C
适用介质Suitable Medium:	干灰、粉煤及固体颗粒 Dry ash, and adding solid particles

RELIEF VALVES

○ 安全阀类



SPRING-LOADED LOW-LIFT SAFETY VALVE WITH LEVER

带扳手弹簧微启式安全阀

产品型号Product Model:	A47H
公称通径Nominal Diameter:	20~250mm
公称压力Nominal Pressure:	1.0~4.0MPa
适用温度Suitable temperature:	-29°C~450°C
适用介质Suitable Medium:	蒸气、空气等 Steam, air, etc



SPRING-LOADED LOW-LIFT CLOSED SAFETY VALVE

弹簧微启封闭式安全阀

产品型号Product Model:	A41H/Y
公称通径Nominal Diameter:	20~250mm
公称压力Nominal Pressure:	1.6~4.0MPa
适用温度Suitable temperature:	-29°C~300°C
适用介质Suitable Medium:	石油、空气、水 Oil, water and air



SPRING-LOADED LOW-LIFT MALE THREAD SAFETY VALVE

弹簧微启式外螺纹安全阀

产品型号Product Model:	A21H
公称通径Nominal Diameter:	15~25mm
公称压力Nominal Pressure:	1.0~4.0MPa
适用温度Suitable temperature:	-29°C~30°C
适用介质Suitable Medium:	空气、氨、石油、气等 Air, ammonia, oil, gas, etc



SPRING-LOADED FULL-LIFT CLOSED SAFETY VALVE

弹簧全启封闭式安全阀

产品型号Product Model:	A42Y
公称通径Nominal Diameter:	20~350mm
公称压力Nominal Pressure:	1.6~4.0MPa
适用温度Suitable temperature:	-29°C~300°C
适用介质Suitable Medium:	变动背压、有毒易燃或腐蚀性介质 Change back pressure, toxic flammable or corrosive



SPRING LOADED FULL LIFT SAFETY VALVE WITH HANDWHEEL

带手柄弹簧全启式安全阀

产品型号Product Model:	A28H A28Y-16/25/40P/R
公称通径Nominal Diameter:	15~65mm
公称压力Nominal Pressure:	1.6~4.0MPa
适用温度Suitable temperature:	-29°C~300°C
适用介质Suitable Medium:	空气、蒸气、水、氮氢混合气等 All, steam, water, nitrogen hydrogen mix gas and sn on



HPHT SPRING LOADED FULL LIFT SAFETY VALVE

高温高压弹簧全启式安全阀

产品型号Product Model:	A48SB
公称通径Nominal Diameter:	15~200mm
公称压力Nominal Pressure:	6.4~16.0MPa
适用温度Suitable temperature:	-29°C~550°C
适用介质Suitable Medium:	蒸气 Steam



DIN RELIEF VALVE

德标安全阀

产品型号Product Model:	900
公称通径Nominal Diameter:	20~250mm
公称压力Nominal Pressure:	4.0~16.0MPa
适用温度Suitable temperature:	-29°C~300°C
适用介质Suitable Medium:	石油、天然气、化工、电力、城市燃气等 Oil, natural gas, chemical, industry, electric power, city gas, etc



SPRING LOADED LOW LIFT SAFETY VALVE

弹簧微启式安全阀

产品型号Product Model:	A27X
公称通径Nominal Diameter:	15~80mm
公称压力Nominal Pressure:	1.0~4.0MPa
适用温度Suitable temperature:	-29°C~300°C
适用介质Suitable Medium:	水、空气、蒸气等 Water, air, steam, etc



SANITARY STAINLESS STEEL SAFETY VALVE

洁净系统不锈钢安全阀

产品型号Product Model:	SVL488
公称通径Nominal Diameter:	进口1"-2",出口1 1/2"-3
公称压力Nominal Pressure:	1.0~4.0MPa
适用温度Suitable temperature:	-29°C~300°C
适用介质Suitable Medium:	蒸气、气体和液体 Steam, gas and liquid



DOUBLE SPRING SAFETY VALVE

双联弹簧式安全阀

产品型号Product Model:	A38Y
公称通径Nominal Diameter:	25~200mm
公称压力Nominal Pressure:	1.6~4.6MPa
适用温度Suitable temperature:	-29°C~300°C
适用介质Suitable Medium:	蒸气、空气 Steam, air



LOSED VARIABLE PRESSURE SPRING LOADED FULL LIFT SAFETY VALVE

弹簧全启封闭式变压安全阀

产品型号Product Model:	A42Y-50
公称通径Nominal Diameter:	15~50mm
公称压力Nominal Pressure:	1.6~4.0MPa
适用温度Suitable temperature:	-29°C~300°C
适用介质Suitable Medium:	氨、氮、混合气 Nitrogen and hydrogen, the mixture



PARALLEL TYPE SAFETY BACKFLOW PREVENTER

平行式安全回流阀

产品型号Product Model:	AHN42F
公称通径Nominal Diameter:	40~150mm
公称压力Nominal Pressure:	1.6~4.0MPa
适用温度Suitable temperature:	-29°C~300°C
适用介质Suitable Medium:	石油 Oil



DOUBLE LEVERAGE THE RELIEF VALVE

双杆杆安全阀

产品型号Product Model:	GA44H
公称通径Nominal Diameter:	80mm
公称压力Nominal Pressure:	1.6~6.4MPa
适用温度Suitable temperature:	-29°C~425°C
适用介质Suitable Medium:	蒸气、空气 Steam, air



SINGLE LEVER RELIEF VALVE

单杠杆安全阀

产品型号Product Model:	GA471H
公称通径Nominal Diameter:	25~200mm
公称压力Nominal Pressure:	1.6~4.0MPa
适用温度Suitable temperature:	-29°C~425°C
适用介质Suitable Medium:	蒸气、空气 Steam, air



THE RELIEF VALVE

主安全阀

产品型号Product Model:	A49H
公称通径Nominal Diameter:	25~250mm
公称压力Nominal Pressure:	1.6~4.0MPa
适用温度Suitable temperature:	-29°C~425°C
适用介质Suitable Medium:	蒸气、空气 Steam, air



PULSED RELIEF VALVE

脉冲式安全阀

产品型号Product Model:	GA49H-4、DN25
公称通径Nominal Diameter:	25~50mm
公称压力Nominal Pressure:	1.6MPa
适用温度Suitable temperature:	-29°C~300°C
适用介质Suitable Medium:	蒸气、水、气、油 Steam, water, gas, oil

PLUG VALVES

○ 旋塞阀类

LIFT HARD SEALING PLUG VALVES

提升式硬密封旋塞阀



产品型号Product Model: X42W、X43H、X43Y
公称通径Nominal Diameter: 15~350mm
公称压力Nominal Pressure: 150~1500Lb
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、蒸气、油品
Water, stem, oil products

FERRULE TYPE SOFT SEALED PLUG VALVE

卡套式软密封旋塞阀



产品型号Product Model: X43F、X343F
公称通径Nominal Diameter: 15~350mm
公称压力Nominal Pressure: 150~900Lb
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、油品
Water,oil

PRESSURE BALANCE TYPE TO THE LOADING OF OIL SEALING PLUG VALVES

压力平衡式到装油密封旋塞阀



产品型号Product Model: X47F、X47X
公称通径Nominal Diameter: 15~350mm
公称压力Nominal Pressure: 150~900Lb
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、油品
Water,oil

2-WAY FULL BRASS FEMALEPLUG VALVE

二通内螺全铜旋塞阀



产品型号Product Model: X13W
公称通径Nominal Diameter: 15~100mm
公称压力Nominal Pressure: 1.0MPa
适用温度Suitable temperature: -46°C~200°C
适用介质Suitable Medium:
水、蒸气、油品
Water, steam, oil products

2-WAY INSULATED PLUG VALVE

二通保温旋塞阀



产品型号Product Model: BX43W
公称通径Nominal Diameter: 20~300mm
公称压力Nominal Pressure: 1.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
硝酸类
Nitric acid kind of

2-WAY FULL BRASS PLUG VALVE

二通全铜旋塞阀



产品型号Product Model: X43W
公称通径Nominal Diameter: 15~300mm
公称压力Nominal Pressure: 1.0MPa
适用温度Suitable temperature: -46°C~200°C
适用介质Suitable Medium:
水、蒸气、油品
Water, steam, oil products

2-WAY STAINLESS STEEL FEMALE PLUG VALVE

二通内螺不锈钢旋塞阀



产品型号Product Model: X13W
公称通径Nominal Diameter: 15~100mm
公称压力Nominal Pressure: 1.0MPa
适用温度Suitable temperature: -29°C~300°C
适用介质Suitable Medium:
硝酸、醋酸
Nitric acid, acetic acid

3-WAY PLUG VALVE WITH COPPER CORE

三通铜芯旋塞阀



产品型号Product Model: X44T
公称通径Nominal Diameter: 25~300mm
公称压力Nominal Pressure: 1.0MPa
适用温度Suitable temperature: -46°C~200°C
适用介质Suitable Medium:
水、蒸气、油品
Water, steam, oil products

NEEDLE VALVES

○ 针形阀类

FEMALE THREAD NEEDLE GLOBE VALVE

内螺纹针式截止阀



产品型号Product Model: J13W/H
公称通径Nominal Diameter: 6~50mm
公称压力Nominal Pressure: 2.5~32MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、蒸汽、气体等
water, steam, gas etc

MALE ANGLE THREAD NEEDLE GLOBE VALVE

外螺纹角式针型阀



产品型号Product Model: J24W
公称通径Nominal Diameter: 3~6mm
公称压力Nominal Pressure: 16.0~32.0MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
液化石油气、水、酸、蒸汽、油品等
Liquefied petroleum gas, water, steam, oil, acid, etc

GAUGE NEEDLE VALVE

压力表针型阀



产品型号Product Model: J19H
公称通径Nominal Diameter: 6~15mm
公称压力Nominal Pressure: 1.6~32.0MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
液化石油气、酸、蒸汽、油
Liquefied petroleum gas, steam, acid, oil

FLANGE ANGLE TYPE GLOBE VALVE

法兰角式截止阀



产品型号Product Model: J44W
公称通径Nominal Diameter: 15~300mm
公称压力Nominal Pressure: 16.0~4.0MPa
适用温度Suitable temperature: ≤200°C≤425°C
适用介质Suitable Medium:
液化石油气、水、酸、蒸汽、油品等
Liquefied petroleum gas, water, steam, oil, acid, etc

UNION NEEDLE GLOBE VALVE

活接头针式截止阀



产品型号Product Model: J21W/H
公称通径Nominal Diameter: 6~25mm
公称压力Nominal Pressure: 2.5~32MPa
适用温度Suitable temperature: -29°C~550°C
适用介质Suitable Medium:
水、蒸汽、气体等
water, steam, gas, etc

BUTT WELD NEEDLE VALVE TYPE

对焊针型阀



产品型号Product Model: J61Y
公称通径Nominal Diameter: 6~25mm
公称压力Nominal Pressure: 16.0~32.0MPa
适用温度Suitable temperature: -29°C~550°C
适用介质Suitable Medium:
液化石油气、水、酸、蒸汽、油品等
Liquefied petroleum gas, water, steam, oil, acid, etc

FORGED STEEL MALE THREAD GLOBE VALVE

锻钢外螺纹截止阀



产品型号Product Model: J21W/H
公称通径Nominal Diameter: 10~50mm
公称压力Nominal Pressure: 1.6~16MPa
适用温度Suitable temperature: -29°C~600°C
适用介质Suitable Medium:
水、油品、蒸汽
water, oil, steam

NEEDLE INSTRUMENT VALVE

针型仪表阀



产品型号Product Model: JJM1(M8)
公称通径Nominal Diameter: 5~20mm
公称压力Nominal Pressure: 2.5~32MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、蒸汽、气体等
water, steam, gas, ect

NEEDLE VALVES

针形阀类

PINGHENGZHEN TYPE VALVE

平衡针型阀



产品型号Product Model: QFF3
公称通径Nominal Diameter: 5mm
公称压力Nominal Pressure: 1.6~32.0MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
液化石油气、酸、蒸气、油
Liquefied petroleum gas, acid, steam, oil

MALE AND FEMALE GLOBE VALVE

雌雄截止阀



产品型号Product Model:
公称通径Nominal Diameter: 5~20mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: ≤200°C≤425°C
适用介质Suitable Medium:
液化石油气、水、酸、蒸气、油品等
Liquefied petroleum gas, water, steam, oil, acid, ect

LEVEL GAUGE VALVE

液位计阀



产品型号Product Model: JX29W/H
公称通径Nominal Diameter: 6mm
公称压力Nominal Pressure: 1.6~32.0MPa
适用温度Suitable temperature: ≤180°C
适用介质Suitable Medium:
水、蒸气
Water, steam

TAKE PRESSURE GLOBE VALVE

取压截止阀



产品型号Product Model: JJBY1
公称通径Nominal Diameter: 5mm
公称压力Nominal Pressure: 1.6~32.0MPa
适用温度Suitable temperature: ≤180°C
适用介质Suitable Medium:
水、蒸气
Water, steam

FLANGE GLOBE VALVE

法兰截止阀



产品型号Product Model:
公称通径Nominal Diameter: 10~15mm
公称压力Nominal Pressure: 1.6~32.0MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、蒸气
Water, steam

FERRULE TYPE BALL VALVE

卡套式球阀



产品型号Product Model: QGY1
公称通径Nominal Diameter: 10mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -20°C~350°C
适用介质Suitable Medium:
气体、水、油品、酸性液体
Gas, water, oil acid liquid

TAKE PRESSURE BALL VALVE

取压球阀



产品型号Product Model: QGAY1
公称通径Nominal Diameter: 10mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
气体、水、油品
Water, oil, gas, etc

AIR BALL VALVE

气源球阀



产品型号Product Model: QGAY1
公称通径Nominal Diameter: 5~50mm
公称压力Nominal Pressure: 2.5~16.0MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
水、油品、气体等
Water, oil, gas, etc

STEAM TRAPS

疏水阀类

FREE FLOAT STEAM TRAP

自由浮球式疏水阀



产品型号Product Model: CS41H
公称通径Nominal Diameter: 15~150mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~380°C
适用介质Suitable Medium:
水、蒸气等
Water, steam, etc

TURN DOWN THE BARREL TYPE STEAM TRAP

倒置桶式蒸气疏水阀



产品型号Product Model: L881F-L886F
公称通径Nominal Diameter: 15~200mm
公称压力Nominal Pressure: 1.6~2.5MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
蒸气
steam

ADJUSTABLE BIMETAL STEAM TRAP

可调双金属片式疏水阀



产品型号Product Model: LTB11FLTB6F(CS47H)
公称通径Nominal Diameter: 15~50mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~200°C
适用介质Suitable Medium:
蒸汽管道、冷凝器
Steam pipe, condenser

BELLOWS TYPE STEAM TRAP

波纹管式疏水阀



产品型号Product Model: CS14FH/W
公称通径Nominal Diameter: 15~50mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~350°C
适用介质Suitable Medium:
蒸气
steam

THERMODYNAMIC (DISC) TYPE STEAM TRAP

热动力（圆盘）式疏水阀



产品型号Product Model: CS49H
公称通径Nominal Diameter: 15~100mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~350°C
适用介质Suitable Medium:
蒸气
steam

FILM CASSETTE STEAM TRAP

膜盒式疏水阀



产品型号Product Model: CS46H
公称通径Nominal Diameter: 15~50mm
公称压力Nominal Pressure: 1.0~4.0MPa
适用温度Suitable temperature: -29°C~250°C
适用介质Suitable Medium:
供热气主管线、伴热管线、干燥器、工业加热
Heating, steam competentline, heating pipes, Dryer, industrial heat

FREE HALF FLOAT TYPE STEAM TRAP

自由半浮球式蒸气疏水阀



产品型号Product Model: CS15H
公称通径Nominal Diameter: 15~100mm
公称压力Nominal Pressure: 1.0~4.0MPa
适用温度Suitable temperature: ≤350°C
适用介质Suitable Medium:
蒸气、化工、炼油、电力、轻纺、造纸等
Steam, chemical, oil, refining, electric power, textile, paper, etc

ADJUSTABLE THERMOSTATIC STEAM TRAP

可调恒温式疏水阀



产品型号Product Model: STC
公称通径Nominal Diameter: 15~100mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: ≤220°C
适用介质Suitable Medium:
蒸气
steam

STEAM TRAPS

○ 疏水阀类



FREE FLOAT TYPE STEAM TRAP

自由浮球式疏水阀

产品型号Product Model:	CS11H
公称通径Nominal Diameter:	15~150mm
公称压力Nominal Pressure:	1.6~4.0MPa
适用温度Suitable temperature:	-29°C~425°C
适用介质Suitable Medium:	水、蒸气等 Water, steam, etc



ADJUSTABLE BIMETAL STRIP TYPE STEAM TRAP

可调双金属片式疏水阀

产品型号Product Model:	LT86LTB11(CS17H)
公称通径Nominal Diameter:	15~50mm
公称压力Nominal Pressure:	1.6~4.0MPa
适用温度Suitable temperature:	-29°C~200°C
适用介质Suitable Medium:	蒸气管道、冷凝器 Steam pipe, condenser



BELLOW TYPE STEAM TRAP

波纹管式疏水阀

产品型号Product Model:	CS14F
公称通径Nominal Diameter:	15~50mm
公称压力Nominal Pressure:	1.6~4.0MPa
适用温度Suitable temperature:	-29°C~350°C
适用介质Suitable Medium:	蒸气 Steam



THERMODYNAMIC DISC STEAM TRAP

热动力（圆盘）式疏水阀

产品型号Product Model:	CS19H
公称通径Nominal Diameter:	15~50mm
公称压力Nominal Pressure:	1.6~4.0MPa
适用温度Suitable temperature:	-29°C~350°C
适用介质Suitable Medium:	蒸气 steam



CAPSULE TYPE STEAM TRAP

膜盒式疏水阀

产品型号Product Model:	CS16H
公称通径Nominal Diameter:	15~50mm
公称压力Nominal Pressure:	1.0~4.0MPa
适用温度Suitable temperature:	-29°C~250°C
适用介质Suitable Medium:	供热气主管线、伴热管线、干燥器、工业加热 Heating steam, competent line, heating pipes, Dryer, industrial heat



ADJUSTABLE THERMOSTATIC TYPE STEAM TRAP

可调恒温式疏水阀

产品型号Product Model:	STB
公称通径Nominal Diameter:	15~100mm
公称压力Nominal Pressure:	1.6~4.0MPa
适用温度Suitable temperature:	≤220°C
适用介质Suitable Medium:	蒸气 steam



BELL FLOAT INVERTED BUCKET STEAM TRAP

钟型浮子（倒吊桶）式疏水阀

产品型号Product Model:	ES8N(CS15H)
公称通径Nominal Diameter:	15~50mm
公称压力Nominal Pressure:	1.6~4.0MPa
适用温度Suitable temperature:	-29°C~425°C
适用介质Suitable Medium:	蒸气主管、分汽缸、热交换器、硫化机 Steam director, points cylinders, heat exchanger



BIMETALLIC STRIP STEAM TRAP

双金属片式疏水阀

产品型号Product Model:	BK型(CS17H)
公称通径Nominal Diameter:	15~50mm
公称压力Nominal Pressure:	1.6~4.0MPa
适用温度Suitable temperature:	-29°C~220°C
适用介质Suitable Medium:	蒸气、凝结水 Steam and condensate

REDUCING VALVES

○ 减压阀类



DIRECT-ACTING SPRING DIAPHRAGM PRESSURE REDUCING VALVE

直接作用弹簧薄膜式减压阀

产品型号Product Model:	Y42X
公称通径Nominal Diameter:	15~500mm
公称压力Nominal Pressure:	1.0~2.5MPa
适用温度Suitable temperature:	0°C~80°C
适用介质Suitable Medium:	水、非腐蚀性液体 water, the corrosive liquid



STEAM PRESSURE REDUCING VALVE

蒸气减压阀

产品型号Product Model:	Y43H
公称通径Nominal Diameter:	15~400mm
公称压力Nominal Pressure:	1.0~10MPa
适用温度Suitable temperature:	≤350°C
适用介质Suitable Medium:	蒸气 Steam



LEVER TYPE PRESSURE REDUCING VALVE

杠杆式减压阀

产品型号Product Model:	Y45H/Y
公称通径Nominal Diameter:	50~400mm
公称压力Nominal Pressure:	6.4~10.0MPa
适用温度Suitable temperature:	≤220°C
适用介质Suitable Medium:	蒸气 steam



PILOT PISTON GAS PRESSURE REDUCING VALVE

先导活塞式气体减压阀

产品型号Product Model:	YK43X、YK43F、YK43H
公称通径Nominal Diameter:	15~500mm
公称压力Nominal Pressure:	1.6~16.0MPa
适用温度Suitable temperature:	200°C
适用介质Suitable Medium:	空气、氮气、氧气、氢气、液化气、天然气等水体 Air, nitrogen,oxygen, hydrogen, liquefied petroleumgas, natural gas, gas



SPIRAX SARCO STEAM PRESSURE REDUCING VALVE

斯派莎克蒸气减压阀

产品型号Product Model:	YD43H
公称通径Nominal Diameter:	15~150mm
公称压力Nominal Pressure:	1.0~2.5MPa
适用温度Suitable temperature:	-29°C~425°C
适用介质Suitable Medium:	蒸气 steam



HIGH SENSITIVITY STEAM PRESSURE REDUCING VALVE

高灵敏度蒸汽减压阀

产品型号Product Model:	YG43H/Y
公称通径Nominal Diameter:	25~80mm
公称压力Nominal Pressure:	1.0~1.6MPa
适用温度Suitable temperature:	≤350°C
适用介质Suitable Medium:	蒸气 steam



PROPORTIONAL PRESSURE REDUCING VALVE

比例式减压阀

产品型号Product Model:	Y43X
公称通径Nominal Diameter:	40~200mm
公称压力Nominal Pressure:	1.0~2.5MPa
适用温度Suitable temperature:	0°C~80°C
适用介质Suitable Medium:	水 water



BRANCH PRESSURE REDUCING VALVE

支管减压阀

产品型号Product Model:	YZ11X
公称通径Nominal Diameter:	15~50mm
公称压力Nominal Pressure:	1.0~1.6MPa
适用温度Suitable temperature:	0°C~80°C
适用介质Suitable Medium:	水、油、气 water,oil,gas

FILTERS

○ 过滤器类

Y STRAINER

Y型过滤器



产品型号Product Model: G41H
公称通径Nominal Diameter: 20~500mm
公称压力Nominal Pressure: 1.0~2.5MPa
适用温度Suitable temperature: ≤425°C
适用介质Suitable Medium:
水、油、气
water,oil,gas

HIGH-LOW NOZZLE BASKET STRAINER VALVE

高低接管篮式过滤阀



产品型号Product Model:SBL
公称通径Nominal Diameter: 25~500mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、油品、酸碱类等
water, oil, acid and alkali class, etc

PULL ROD TELESCOPIC STRAINER

拉杆伸缩过滤器



产品型号Product Model: YSTF
公称通径Nominal Diameter: 50~400mm
公称压力Nominal Pressure: 1.0~2.5MPa
适用温度Suitable temperature: 0~80°C
适用介质Suitable Medium:
水、油等
water,oil,etc

STRAIGHT BASKET STRAINER

直通篮式过滤器



产品型号Product Model: SBL 14
公称通径Nominal Diameter: 25~500mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、油品、酸碱类等
water, oil, acid and alkali class, etc

FILTER

过滤器



产品型号Product Model: U型
公称通径Nominal Diameter: 15~200mm
公称压力Nominal Pressure: 1.6~2.5MPa
适用温度Suitable temperature: ≤350°C
适用介质Suitable Medium:
水、油、空气、蒸气
water, oil, air, steam

AUTOMATIC REVERSE WASH STRAINER

自动反冲洗过滤器



产品型号Product Model: ZPG
公称通径Nominal Diameter: 40~1500mm
公称压力Nominal Pressure: 0.6~5.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水
water

FLANGE CONNECTION IS, REFLEXED STREAMING T STRAINER

法兰连接正、反折流式T型过滤器



产品型号Product Model: ST14/24
公称通径Nominal Diameter: 50~400mm
公称压力Nominal Pressure: 1.0~4.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、油品、酸碱类等
water, oil, acid and alkali class, etc

BUCKET TO BE AUTOMATIC REVERSE WASH STRAINER

氧气、氮气过滤器



产品型号Product Model: QF
公称通径Nominal Diameter: 40~400mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~150°C
适用介质Suitable Medium:
空气、氧气、氮气
Air, oxygen, nitrogen

BELLOWS VALVES

○ 波纹管阀类

DIN STANDARD BELLOW GLOBE VALVE

德标波纹管截止阀



产品型号Product Model: WJ41H/F
公称通径Nominal Diameter: 15~350mm
公称压力Nominal Pressure: 10.0~25.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、蒸气、油品
water, steam, oil products

DIN GLOBE VALVE

德标截止阀



产品型号Product Model: JW41H
公称通径Nominal Diameter: 15~300mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、蒸气、油品
water, steam, oil products

ANSI STANDARD BELLOWS GLOBE VALVE

美标波纹管截止阀



产品型号Product Model: WJ41H
公称通径Nominal Diameter: 15~350mm
公称压力Nominal Pressure: 150~300Lb
适用介质Suitable Medium:
适用温度Suitable temperature: -29°C~425°C
水、蒸气、油品
water, steam, oil products

GB (A105) BELLOWS GLOBE VALVE

国标（A105）波纹管截止阀



产品型号Product Model: WJ41H/W
公称通径Nominal Diameter: 15~350mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、蒸气、油品
water, steam, oil products

GB STRAIGHT WAVE TYPE BELLOWS GLOBE VALVE

国标直波式波纹管截止阀



产品型号Product Model: WJ45H/F
公称通径Nominal Diameter: 15~350mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
天然气、热水
Natural gas, hot water

DIN Y-TYPE FILTER

德标Y型过滤器



产品型号Product Model: GY41H
公称通径Nominal Diameter: 15~500mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
热油、蒸气、热水
Heat oil, steam and hot water

DIN CHECK VALVE

德标止回阀



产品型号Product Model: H41H (Y)
公称通径Nominal Diameter: 15~300mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、蒸气、油品
water, steam, oil products

DALIAN TYPE BELLOWS GLOBE VALVE

大连式波纹管截止阀



产品型号Product Model: BL8C5Y
公称通径Nominal Diameter: 15~50mm
公称压力Nominal Pressure: 1.6~16MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium:
水、蒸气、油品
water, steam, oil products

OXYGEN VALVES

○ 氧气阀类



STAINLESS STEEL OXYGEN GLOBE VALVE

不锈钢氧气截止阀

产品型号Product Model:	JY41W
公称通径Nominal Diameter:	15~400mm
公称压力Nominal Pressure:	1.6~4.0MPa
适用温度Suitable temperature:	-29°C~150°C
适用介质Suitable Medium:	氧气、氮气、氢气、空气等 Oxygen, nitrogen, hydrogenair, etc



STAINLESS STEEL OXYGEN BALL VALVE

不锈钢氧气球阀


产品型号Product Model:	QY347
公称通径Nominal Diameter:	15~400mm
公称压力Nominal Pressure:	2.5~4.0MPa
适用温度Suitable temperature:	≤150°C
适用介质Suitable Medium:	氧气 Oxygen



COPPER OXYGEN VALVE

铜氧气阀

产品型号Product Model:	JY41W
公称通径Nominal Diameter:	15~400mm
公称压力Nominal Pressure:	2.5~4.0MPa
适用温度Suitable temperature:	≤150°C
适用介质Suitable Medium:	氧气 Oxygen

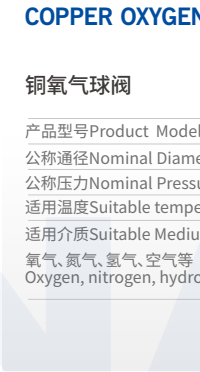

COPPER OXYGEN BALL VALVE

铜氧气球阀

产品型号Product Model:	QY47F
公称通径Nominal Diameter:	15~250mm
公称压力Nominal Pressure:	1.6~4.0MPa
适用温度Suitable temperature:	-20°C~150°C
适用介质Suitable Medium:	氧气、氮气、氢气、空气等 Oxygen, nitrogen, hydrogen air, etc



COPPER OXYGEN VALVE

铜氧气阀

产品型号Product Model:	JY541W
公称通径Nominal Diameter:	15~400mm
公称压力Nominal Pressure:	2.5~4.0MPa
适用温度Suitable temperature:	-40°C~200°C
适用介质Suitable Medium:	氧气 Oxygen



COPPER OXYGEN CHECK VALVE

铜氧气止回阀


产品型号Product Model:	HY41F,HY41W
公称通径Nominal Diameter:	15~600mm
公称压力Nominal Pressure:	1.6~4.0MPa
适用温度Suitable temperature:	-20°C~150°C
适用介质Suitable Medium:	氧气、氮气、氢气、空气等 Oxygen, nitrogen, hydrogen air. etc



LOW TEMPERATURE GLOBE VALVE

低温截止阀

产品型号Product Model:	DJ61Y
公称通径Nominal Diameter:	10~100mm
公称压力Nominal Pressure:	1.6~4.0MPa
适用温度Suitable temperature:	≥196°C
适用介质Suitable Medium:	液氧、液氮 Liquid oxygen, liquid nitrogen

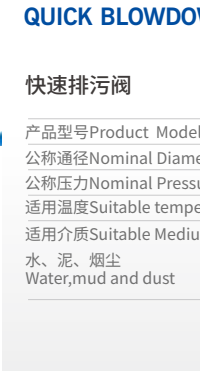

QUICK BLOWDOWN VALVE

快速排污阀

产品型号Product Model:	P48H、Z44H
公称通径Nominal Diameter:	25~80mm
公称压力Nominal Pressure:	1.6~4.0MPaa
适用温度Suitable temperature:	≤450°C
适用介质Suitable Medium:	水、泥、烟尘 Water,mud and dust

EXHAUST VALVES & SIGHT GLASS

○ 排气阀/视镜类



GZW- FLAME RETARDANT/ EXPLOSION-PROOF PIPE FLAME ARRESTER

阻燃/防爆管道阻火器

产品型号Product Model:	GZW-1
公称通径Nominal Diameter:	20~600mm
公称压力Nominal Pressure:	0.6~5.0MPa
适用温度Suitable temperature:	-29°C~350°C
适用介质Suitable Medium:	油品、氢气液化 Oil, hydrogen, and oxygen liquefaction



QUICK AIR RELEASE & INLET VALVE

快速排（进）气阀

产品型号Product Model:	P2、QB2
公称通径Nominal Diameter:	50~20mm
公称压力Nominal Pressure:	1.0MPa
适用温度Suitable temperature:	-40°C~80°C
适用介质Suitable Medium:	水 Water



QUICK EXHAUST VALVE

快速排气阀

产品型号Product Model:	P41X、P42X、QB1
公称通径Nominal Diameter:	15~300mm
公称压力Nominal Pressure:	1.0~1.6MPa
适用温度Suitable temperature:	-40°C~80°C
适用介质Suitable Medium:	水 Water



COMPOSITE EXHAUST VALVE

复合式排气阀

产品型号Product Model:	CARX
公称通径Nominal Diameter:	25~200mm
公称压力Nominal Pressure:	1.0~1.6MPa
适用温度Suitable temperature:	0°C~80°C
适用介质Suitable Medium:	水 Water



STAINLESS STEEL THROUGH SIGHT GLASS

不锈钢直通视镜

产品型号Product Model:	HGS07- ¹⁰³ / ₁₀₄
公称通径Nominal Diameter:	20~200mm
公称压力Nominal Pressure:	0.6~2.5MPa
适用温度Suitable temperature:	-29°C~150°C
适用介质Suitable Medium:	水、油品 Water,oil



SIGHT CUP

视盅

产品型号Product Model:	HGS07
公称通径Nominal Diameter:	15~150mm
公称压力Nominal Pressure:	0.6MPa
适用温度Suitable temperature:	-29°C~150°C
适用介质Suitable Medium:	水、油品 Water,oil



BOX ON THE PLATE SIGHT GLASS

方框板式视镜

产品型号Product Model:	LJSJ
公称通径Nominal Diameter:	15~500mm
公称压力Nominal Pressure:	0.6~2.5MPa
适用温度Suitable temperature:	-29°C~150°C
适用介质Suitable Medium:	水、油品、蒸汽 Water,oil,steam



SIGHT GLASS

视镜

产品型号Product Model:	JB593-64
公称通径Nominal Diameter:	15~600mm
公称压力Nominal Pressure:	0.6~1.6MPa
适用温度Suitable temperature:	-29°C~150°C
适用介质Suitable Medium:	水、油品 Water,oil

FEEDING VALVES & PULP VALVES

○ 放料阀/浆料阀类

THE EXHIBITION MANUAL TYPE FEEDING VALVES

手动上展式放料阀



产品型号Product Model: HG5-81-1
公称通径Nominal Diameter: 50~400mm
公称压力Nominal Pressure: 1.0~6.4MPa
适用温度Suitable temperature: -29°C~650°C
适用介质Suitable Medium:
油品、酸类
Oil,acid

THE EXHIBITION MANUAL TYPE FEEDING VALVES

手动下展式放料阀



产品型号Product Model: HG5-81-2
公称通径Nominal Diameter: 50~400mm
公称压力Nominal Pressure: 1.0~6.4MPa
适用温度Suitable temperature: -29°C~650°C
适用介质Suitable Medium:
油品、酸类
Oil,acid

PIPE JOINT DISCHARGE VALVE

管接放料阀



产品型号Product Model: FG45Y
公称通径Nominal Diameter: 50~550mm
公称压力Nominal Pressure: 1.6~16.0MPa
适用温度Suitable temperature: -29°C~300°C
适用介质Suitable Medium:
油品、酸类、腐蚀性介质
Oil,acid corrosive medium

Y-TYPE DISCHARGE VALVE

Y型料浆阀



产品型号Product Model: JS545Y
公称通径Nominal Diameter: 50~500mm
公称压力Nominal Pressure: 1.6~16.0MPa
适用温度Suitable temperature: -29°C~300°C
适用介质Suitable Medium:
油品、酸类、腐蚀性介质
Oil,acid corrosive medium

PNEUMATIC FLAT BOTTOM DISCHARGE VALVE WITH MANUAL OPERATION

气动带手动平底放料阀



产品型号Product Model: FB6S45Y
公称通径Nominal Diameter: 50~500mm
公称压力Nominal Pressure: 1.6~16.0MPa
适用温度Suitable temperature: -29°C~300°C
适用介质Suitable Medium:
油品、酸类、腐蚀性介质
Oil,acid corrosive medium

ANGLE TYPE FEEDING VALVE

角式放料阀



产品型号Product Model: FB44Y
公称通径Nominal Diameter: 50~500mm
公称压力Nominal Pressure: 1.6~16.0MPa
适用温度Suitable temperature: -29°C~300°C
适用介质Suitable Medium:
油品、酸类、腐蚀性介质
Oil,acid corrosive medium

ELECTRIC Y-TYPE SLURRY VALVE SERIES

电动Y型料浆阀系列



产品型号Product Model: JS945Y
公称通径Nominal Diameter: 50~400mm
公称压力Nominal Pressure: 1.6~16.0MPa
适用温度Suitable temperature: -29°C~300°C
适用介质Suitable Medium:
油品、酸类、腐蚀性介质
Oil,acid corrosive medium

PNEUMATIC FLAT BOTTOM DISCHARGE VALVE

气动平底放料阀



产品型号Product Model: FB645Y
公称通径Nominal Diameter: 50~500mm
公称压力Nominal Pressure: 1.6~16.0MPa
适用温度Suitable temperature: -29°C~300°C
适用介质Suitable Medium:
油品、酸类、腐蚀性介质
Oil,acid corrosive medium

METALLURGICAL VALVE SERIES

○ 冶金阀门系列



METALLURGICAL VALVES

冶金阀门类



INTELLIGENT TYPE DOUBLE ASH DISCHARGE VALVE

智能式双层卸灰阀

公称通径Nominal Diameter: 200~800mm
适用温度Suitable temperature: ≤300°C
结构形式Structure form: 方形(正、侧) (Square, sie)
适用介质Suitable Medium: 粉状物质、固体晶质 Powder material,solid crystal material
驱动方式Driving Way: 手动、电动、气动 Manual and electric pneumatic
运行方式Operation mode: 翻板式、插板式 The flap type,plug board type



WATER-COOLED SUPER HIGH TEMPERATURE BUTTERFLY VALVE

水冷式超高温蝶阀

公称通径Nominal Diameter: 150~3000mm
公称压力Nominal Pressure: 0.01MPa
适用温度Suitable temperature: 950~1300°C
驱动方式Driving Way: 手轮、电动 Manual and electric
适用介质Suitable Medium: 烟气及其他超高温气体 Ultra high temperature flue gas and other gases
材质形式 Material form: 双水冷或单水冷 (阀体、阀板) Cold or single water-cooling hands (the valve body and disc)



LET IN FRESH AIR VALVE

放风阀

公称通径Nominal Diameter: 150~600mm
适用温度Suitable temperature: ≤250°C
公称压力Nominal Pressure: 0.1MPa
适用介质Suitable Medium: 空气、尘气、煤气 Air, gas and other gases



THE ASH DISCHARGE VALVE FLAP LOCK

翻板锁风卸灰阀

公称通径Nominal Diameter: 150~800mm
适用温度Suitable temperature: ≤300°C
结构形式Structure form: 圆形、方形 (Round, square)
适用介质Suitable Medium: 粉状或小颗粒物质 Powder of small particle materials
驱动方式Driving Way: 重锤、减速机、气动、电动、推杆 Hammer,deceleration machine,pneumatic, electric push rod



FAN-SHAPED GATE VALVES

扇形闸阀

公称通径Nominal Diameter: 200×200-1000×1000mm
适用温度Suitable temperature: ≤300°C
适用介质Suitable Medium: 干燥粉体 Dry powder
驱动方式Driving mode: 手动、电动、气动 Manual and electric pneumatic



IMPELLER FEEDER

叶轮给料机

公称通径Nominal Diameter: 150~800mm
适用温度Suitable temperature: ≤250°C
结构形式Structure form: 圆形、方形(Round,square)
适用介质Suitable Medium: 粉状或小颗粒状物质 Powderor small granularmaterial



TEE LIUZI

三通溜子

公称通径Nominal Diameter: 200~800mm
适用温度Suitable temperature: ≤300°C
结构形式Structure form: 方形(正、侧) (Square, sie)
适用介质Suitable Medium: 粉状物质、固体晶质 Powder material,solid crystal material
驱动方式Driving Way: 手动、电动、气动 Manual and electric pneumatic



TDSZ THE VALVE

TDSZ扇形闸门

公称通径Nominal Diameter: 300×300~800×800mm
适用温度Suitable temperature: ≤300°C
适用介质Suitable Medium: 干燥粉体 Dry powder
驱动方式Driving Mode: 电动推杆 Motor-driven push-rod

METALLURGICAL VALVES

冶金阀门类



WORM GEAR TYPE FAN BLIND PLATE VALVES

蜗轮式扇形盲板阀

公称通径Nominal Diameter: 300~1400mm
公称压力Nominal Pressure: 0.05~0.25MPa
适用温度Suitable temperature: 200°C(硅橡胶)300°C(氟橡胶)
适用介质Suitable Medium: 煤气及有毒、有害、易燃气体 Gas and poisonous,harmful, flammable gas



HYDRAULIC FAN-SHAPED BLIND PLATE VALVES

液动扇形盲板阀

公称通径Nominal Diameter: 300~1800mm
公称压力Nominal Pressure: 0.05~0.25MPa
适用温度Suitable temperature: 200°C(硅橡胶)300°C(氟橡胶)
适用介质Suitable Medium: 煤气及有毒、有害、易燃气体 Gas and poisonous,harmful, flammable gas



COPPER IRON GATE

镶铜铸铁闸门

规格Specifications: 300~2500mm
结构形式Structure form: 明杆、暗杆 Rising stem, dark bar
安装形式Installation form: 法兰式、靠墙式 Flange, rely on the wall
驱动方式Driving mode: 手轮、手摇、手电两用 The handwheel; hand, flashlightamphlbious
适用温度Suitable Medium: -29°C~120°C
适用介质Suitable Medium: 污水、清水、海水 Sewage, water, and sea water



REGULATION GATE

调节闸门

规格Specifications: 300×300~2500×2500mm
结构形式Structure form: 明杆、暗杆 Rising stem, dark bar
安装形式Installation form: 法兰式、靠墙式 Flange, rely on the wall
驱动方式Driving mode: 手轮、手摇、手电两用 The handwheel; hand, flashlight amphibious
适用介质Suitable Medium: 污水、清水、海水 Sewage, water, and sea water
材质形式 Material form: 不锈钢、碳钢 Stainless steel, carbon steel



DISCHARGING VALVE OPENING AND CLOSING

启闭排灰阀


公称通径Nominal Diameter: 80~600mm
适用温度Suitable temperature: ≤300°C
结构形式Structure form: 圆形、方形 (Round, square)
适用介质Suitable Medium: 固体粉质 Solid powder
驱动方式Driving mode: 手动 Manual



SPIRAL GATE

螺旋闸门

公称通径Nominal Diameter: 80~600mm
适用温度Suitable temperature: ≤300°C
适用介质Suitable Medium: 固体粉状 Solid powder
驱动方式Driving Way: 手轮 (Handwheel)



ARTICLE GREAT GATE

棒条闸门

公称通径Nominal Diameter:200×200-1000×1000mm
适用温度Suitable temperature: ≤300°C
适用介质Suitable Medium: 50mm以下干燥粉体物质 50mm the following dry powder material



INCLINED TYPE FLASHBOARD VALVE

斜式插板阀

公称通径Nominal Diameter: 100~150mm
适用温度Suitable temperature: ≤1500°C
适用介质Suitable Medium: 固体粉质 Solid powder
驱动方式Driving mode: 手动 Manual

METALLURGICAL VALVES


冶金阀门类



LIFT PROPORTIONAL VALVE

升降比例阀

公称通径Nominal Diameter: 200~1250mm
适用温度Suitable temperature: ≤150°C
适用介质Suitable Medium:
颗粒粉尘、物质
Particles of dust, materials
驱动方式Driving mode: 手动 Manual



CLOSED GATE

密闭闸门

公称通径Nominal Diameter: 200~800mm
适用温度Suitable temperature: ≤300°C
适用介质Suitable Medium:
固体粉质
Solid powder
驱动方式Driving mode: 手动 Manual



DUST REMOVAL RADIATION VALVE

除尘放散阀

公称通径Nominal Diameter: 150~600mm
适用温度Suitable temperature: ≤300°C
公称压力Nominal Pressure: 0.1MPa
适用介质Suitable Medium: 空气、煤气和其他气体
Air, gas and other gases



RACK TYPE THE COLD WIND VALVE

齿条式冷风阀

公称通径Nominal Diameter: 300×300~800×800mm
适用温度Suitable temperature: ≤300°C
公称压力Nominal Pressure: 0.1MPa
适用介质Suitable Medium:
空气等气体
Gas, such as air
驱动方式Driving mode:
手动、电动、气动、液动
Manual and electric pneumatic, hydraulic



EXPLOSION-PROOF VALVE

防爆阀

公称通径Nominal Diameter: 200~900mm
适用温度Suitable temperature: ≤200°C
公称压力Nominal Pressure: 0.1MPa
适用介质Suitable Medium:
压缩易爆气体
Compression and explosive gas
安装形式Installation form:
正装、侧装
Being installed, side with



MANUAL SINGLE FOLDER TYPE KNIFE GATE VALVE

泄爆阀

公称通径Nominal Diameter: 200~900mm
适用温度Suitable temperature: ≤200°C
公称压力Nominal Pressure: 0.1MPa
适用介质Suitable Medium:
压缩易爆气体
Compression and explosive gas
安装形式Installation form:
法兰式、对焊式 Flange, butt weld type



TOP RADIATION VALE

炉顶放散阀

公称通径Nominal Diameter: 250~550mm
适用温度Suitable temperature: ≤300°C
公称压力Nominal Pressure: 0.1MPa
适用介质Suitable Medium:
空气、粉尘、煤气
Air, the dust gas ags
驱动方式Driving mode:
重锤
Hammer



AIR INLET ROUND

圆风门

公称通径Nominal Diameter: 500~2400mm
公称压力Nominal Pressure: 0.1MPa
适用温度Suitable temperature: ≤120°C
适用介质Suitable Medium:
转炉煤气等
Converter gas, etc
启闭切换时间On-off switch time: ≤15秒

LINED VALVE SERIES

衬里阀门系列



LINED VALVES

衬里阀门类



FLUORINE BALL VALVE

衬氟球阀

产品型号Product Model: Q341F4、F46、Q41F4、F46

公称通径Nominal Diameter: 15~250mm

公称压力Nominal Pressure: 0.6~2.5MPa

适用温度Suitable temperature: -20~180°C

适用介质Suitable Medium:
酸、碱、酮、醇、有机溶剂等
Acid,alkali, ketones, alcohol, organic solvents, etc



FLUORINE BALL PUT MATERIAL VALVE

衬氟球型放料阀

产品型号Product Model: FQ41F4、F46

公称通径Nominal Diameter: 25~200mm

公称压力Nominal Pressure: 0.6~2.5MPa

适用温度Suitable temperature: -20~180°C

适用介质Suitable Medium:
酸、碱、酮、醇、有机溶剂等
Acid,alkali, ketones, alcohol, organic solvents, etc



FLUORINE FLANGED BUTTERFLY (CENTRAL LINE)

衬氟法兰蝶阀(中线)

产品型号Product Model: D341F4、F46

公称通径Nominal Diameter: 40~500mm

公称压力Nominal Pressure: 1.0~1.6MPa

适用温度Suitable temperature: -20~180°C

适用介质Suitable Medium:
硫酸、氢氟酸、硝酸、氯气、苯、强碱、王水、强氧化剂等
Fluoride acid, nitric acid, of sulfuric acid, chlorine, benzene, alkali, aqua regia, strong oxidant, etc



FLUORINE WAFER BUTTERFLY VALVE

衬氟对夹式蝶阀

产品型号Product Model: D371F4、F46

公称通径Nominal Diameter: 50~400mm

公称压力Nominal Pressure: 1.0~1.6MPa

适用温度Suitable temperature: -20~180°C

适用介质Suitable Medium:
硫酸、氢氟酸、硝酸、氯气、苯、强碱、王水、强氧化剂等
Sulfuric acid, chlorofluoric acid, nitric acid, chlorine gas, benzene, strong alkali, aqua aqua, strong oxygen agent, etc



WAFER BUTTERFLY VALVE

对夹连接蝶阀

产品型号Product Model: D71F4、F46

公称通径Nominal Diameter: 40~800mm

公称压力Nominal Pressure: 0.6~1.6MPa

适用温度Suitable temperature: -20~180°C

适用介质Suitable Medium:
酸、碱、酮、醇、有机溶剂等
Acid,alkali, ketones, alcohol, organic solvents, etc



FLUORINE DIAPHRAGM VALVE

衬氟隔膜阀

产品型号Product Model: G41F4、F46

公称通径Nominal Diameter: 15~250mm

公称压力Nominal Pressure: 0.6~1.6MPa

适用温度Suitable temperature: -20~180°C

适用介质Suitable Medium:
酸、碱、酮、醇、有机溶剂等
Acid,alkali, ketones, alcohol, organic solvents, etc



FLUORINE GATE VALVES

衬氟闸阀

产品型号Product Model: Z41F46、F4

公称通径Nominal Diameter: 15~250mm

公称压力Nominal Pressure: 0.6~2.5MPa

适用温度Suitable temperature: -20~180°C

适用介质Suitable Medium:
酸、碱、酮、醇、有机溶剂等
Acid,alkali, ketones, alcohol, organic solvents, etc



FLUORINE GLOBE VALVE

衬氟截止阀

产品型号Product Model: J41F4、F46

公称通径Nominal Diameter: 15~250mm

公称压力Nominal Pressure: 1.0~1.6MPa

适用温度Suitable temperature: -20~180°C

适用介质Suitable Medium:
除熔融碱金属、三氧化氯等
In addition to molten alkali metal, chlorine trioxide, etc

LINED VALVES

衬里阀门类



FLUORINE LIFT CHECK VALVE

衬氟升降式止回阀

产品型号Product Model: H41F4、F46

公称通径Nominal Diameter: 15~450mm

公称压力Nominal Pressure: 1.0, 1.6MPa

适用温度Suitable temperature: -20~180°C

适用介质Suitable Medium:
氢氟酸、发烟硫酸、硝酸、三水氧气、沸腾的苛性钠溶液、酮类等
Ammonia fluoride acid, fuming sulfuric acid, nitric acid, trihydrate oxygen, caustic soda capacity of the boiling liquid, ketone, etc



FLUORINE SWING CHECK VALVE

衬氟旋启式止回阀

产品型号Product Model: H44F4、F46

公称通径Nominal Diameter: 25~400mm

公称压力Nominal Pressure: 1.0, 1.6MPa

适用温度Suitable temperature: -20~180°C

适用介质Suitable Medium:
氢氟酸、发烟硫酸、硝酸、三水氧气、沸腾的苛性钠溶液、酮类等
Ammonia fluoride acid, fuming sulfuric acid, nitric acid, trihydrate oxygen, caustic soda capacity of the boiling liquid, ketone, etc



FLUORINE-COATED VERTICAL CHECK VALVE

衬氟立式止回阀

产品型号Product Model: H42F4、F46

公称通径Nominal Diameter: 15~400mm

公称压力Nominal Pressure: 1.0, 1.6MPa

适用温度Suitable temperature: -20~180°C

适用介质Suitable Medium:
氢氟酸、发烟硫酸、硝酸、三水氧气、沸腾的苛性钠溶液、酮类等
Ammonia fluoride acid, fuming sulfuric acid, nitric acid, trihydrate oxygen, caustic soda capacity of the boiling liquid, ketone, etc



FLUORINE LINED SIGHT GLASS

衬氟视镜

产品型号Product Model: HGS07F4、F46

公称通径Nominal Diameter: 15~200mm

公称压力Nominal Pressure: 0.6~2.50MPa

适用温度Suitable temperature: -20~180°C

适用介质Suitable Medium:
酸、碱、酮、醇、有机溶剂等
Acid,alkali, ketones, alcohol, organic solvents, etc



FLUORINE FILTER

衬氟过滤器

产品型号Product Model:
Y式、篮式
Y type, basket type

公称通径Nominal Diameter: 15~200mm

公称压力Nominal Pressure: 0.6~2.5MPa

适用温度Suitable temperature: -20~180°C

适用介质Suitable Medium:
酸、碱、酮、醇、有机溶剂等
Acid,alkali, ketones, alcohol, organic solvents, etc



FLUORINE COMPENSATOR

衬氟补偿器

公称通径Nominal Diameter: 40~600mm

公称压力Nominal Pressure: 0.40~0.09MPa
0.15~0.09MPa

适用温度Suitable temperature: -20~180°C

适用介质Suitable Medium:
酸、碱、酮、醇、有机溶剂等
Acid,alkali, ketones, alcohol, organic solvents, etc



FLUORINE FITTING

衬氟管件

公称通径Nominal Diameter: 32×25~80X40mm
80×50~150X100mm 150×125~300X250mm

公称压力Nominal Pressure: 0.6~2.5MPa

适用温度Suitable temperature: -20~180°C

适用介质Suitable Medium:
酸、碱、酮、醇、有机溶剂等
Acid,alkali, ketones, alcohol, organic solvents, etc



FLUORINE ELBOW

衬氟弯头

产品型号Product Model: WT

公称通径Nominal Diameter: 50~200mm

公称压力Nominal Pressure: -0.07~2.5MPa

适用温度Suitable temperature: -20~180°C

适用介质Suitable Medium:
酸、碱、强氧化剂等
Acid, alkali, strong oxidizer, etc

THREADED VALVE SERIES

○ 丝扣阀门系列



THREADED VALVES

○ 丝扣阀门类

3PCS BALL VALVE WITH INSTALLATION PLATFORM

三片式高平台丝扣球阀



产品型号Product Model: Q11PPL
公称通径Nominal Diameter: 8~100mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -20~180°C
适用介质Suitable Medium:
液体、气体、油品
Liquid, gas, oil

2PCS FEMALE THREAD BALLVALVE WITH LOCK

二片式球阀



产品型号Product Model: Q11F
公称通径Nominal Diameter: 1/4"~2"
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -20~180°C
适用介质Suitable Medium:
水、油、气及某些腐蚀性液体
Water,oil, gas and some corrosive liquid

2PCS BALL VALVE WITH INSTALLATION PLATFORM

二片式高平台丝扣球阀



产品型号Product Model: Q11F
公称通径Nominal Diameter: 15~100mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -20~180°C
适用介质Suitable Medium:
水、油、蒸气
Water, oil, steam

3PCS BALL VALVE WITH INSTALLATION PLATFORM AND LOCK

三片式高平台丝扣球阀



产品型号Product Model: Q11F
公称通径Nominal Diameter: 15~100mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -20~180°C
适用介质Suitable Medium:
水、油、蒸气
Water, oil, steam

3PCS BALL VALVE WITH LOCK

三片式球阀



产品型号Product Model: Q11F
公称通径Nominal Diameter: 1/4"~4"
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -20~180°C
适用介质Suitable Medium:
水、油、气及某些腐蚀性液体
Water,oil, gas and some corrosive liquid

1PCS BALL VALVE

一片式球阀



产品型号Product Model: Q11F
公称通径Nominal Diameter: 1/4"~4"
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -20~180°C
适用介质Suitable Medium:
水、油、气及某些腐蚀性液体
Water,oil, gas and some corrosive liquid

STAINLESS STEEL WIDE TYPE THREADED BALL VALVE

不锈钢广式内螺纹球阀



产品型号Product Model: Q21F
公称通径Nominal Diameter: 1/4"~4"
公称压力Nominal Pressure: 1.6~4.0MPa
适用温度Suitable temperature: -20~180°C
适用介质Suitable Medium:
水、油、气及某些腐蚀性液体
Water,oil, gas and some corrosive liquid

HEXAGON BALL VALVE

六角球阀



产品型号Product Model: Q21F
公称通径Nominal Diameter: 1/4"~4"
公称压力Nominal Pressure: 2000PSI
适用温度Suitable temperature: -20~180°C
适用介质Suitable Medium:
水、油、蒸气
Water, oil, steam

THREADED VALVES

○ 丝扣阀门类

3 WAY FEMALE THREAD BALL VALVE

内螺纹三通球阀



产品型号Product Model: Q14F
公称通径Nominal Diameter: 1/4"-2.5"
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -20~180°C
适用介质Suitable Medium: 水、油、气及某些腐蚀性液体 Water,oil, gas and some corrosive liquid



THREADED GATE VALVES

美标内螺纹闸阀

产品型号Product Model: Z11W
公称通径Nominal Diameter: 1/2"-4"
公称压力Nominal Pressure: 150~600Lb
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium: 水、蒸气、油品、腐蚀性介质 Water, steam, oil productes, other corrosive medium

THREADED GLOBE VALVE

美标内螺纹截止阀



产品型号Product Model: J11W
公称通径Nominal Diameter: 1/2"-3"
公称压力Nominal Pressure: 150~600Lb
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium: 水、蒸气、油品、腐蚀性介质 Water, steam, oil productes, other corrosive medium



THREADED GLOBE VALVE

不锈钢内螺纹截止阀

产品型号Product Model: J11W
公称通径Nominal Diameter: 1/2"-2"
公称压力Nominal Pressure: 1.6~2.5MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium: 水、蒸气、油品、腐蚀性介质 Water, steam, oil productes, other corrosive medium

STAINLESS STEEL THREADED CHECK VALVE

不锈钢内螺纹止回阀



产品型号Product Model: H11W
公称通径Nominal Diameter: 15~65mm
公称压力Nominal Pressure: 1.6~6.4MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium: 水、蒸气、油品 Water, steam, oil productes



STAINLESS STEEL SMALL-BORE CHECK VALVE

不锈钢小口径止回阀

产品型号Product Model: H14W
公称通径Nominal Diameter: 1/2"-3"
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium: 水、蒸气、油品、腐蚀性介质 Water, steam, oil productes, other corrosive medium

TWO PCS VERTICAL CHECK VALVE SPRING

二片式弹簧立式止回阀



产品型号Product Model: H12W
公称通径Nominal Diameter: 1/2"-3"
公称压力Nominal Pressure: 1.0~1.6MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium: 一般腐蚀性介质、药液、饮料 General corrosive medium, the solution, drinks



Y FILTER

Y型过滤器

产品型号Product Model: SY11C
公称通径Nominal Diameter: 1/4"-3"
公称压力Nominal Pressure: 1.0~2.5MPa
适用温度Suitable temperature: -29°C~425°C
适用介质Suitable Medium: 水、蒸气、油品、腐蚀性介质 Water, steam, oil productes, other corrosive medium

WATER VALVE SERIES

○ 给排水阀门系列



WATER VALVES

○给排水阀门类



REMOTE CONTROL BALL FLOAT VALVE

遥控浮球阀

产品型号Product Model:	100X
公称通径Nominal Diameter:	20~800mm
公称压力Nominal Pressure:	1.0~2.5MPa
适用温度Suitable temperature:	0°C~80°C
适用介质Suitable Medium:	水 Water



PRESSURE REDUCING VALVE

减压阀

产品型号Product Model:	200X
公称通径Nominal Diameter:	20~800mm
公称压力Nominal Pressure:	1.0~2.5MPa
适用温度Suitable temperature:	0°C~80°C
适用介质Suitable Medium:	水 Water



SLOW CLOSED VALVES

缓闭式止回阀

产品型号Product Model:	300X
公称通径Nominal Diameter:	20~800mm
公称压力Nominal Pressure:	1.0~2.5MPa
适用温度Suitable temperature:	0°C~80°C
适用介质Suitable Medium:	水 Water



FLOW CONTROL VALVES

流量控制阀

产品型号Product Model:	400X
公称通径Nominal Diameter:	20~800mm
公称压力Nominal Pressure:	1.0~2.5MPa
适用温度Suitable temperature:	0°C~80°C
适用介质Suitable Medium:	水 Water



PRESSURE RELIEF VALVES

泄压/持压阀

产品型号Product Model:	500X
公称通径Nominal Diameter:	20~800mm
公称压力Nominal Pressure:	1.0~2.5MPa
适用温度Suitable temperature:	0°C~80°C
适用介质Suitable Medium:	水 Water



ELECTRIC CONTROL VALVES

电动控制阀

产品型号Product Model:	600X
公称通径Nominal Diameter:	20~800mm
公称压力Nominal Pressure:	1.0~2.5MPa
适用温度Suitable temperature:	0°C~80°C
适用介质Suitable Medium:	水 Water



PUMP CONTROL VALVES

水泵控制阀

产品型号Product Model:	700X
公称通径Nominal Diameter:	20~800mm
公称压力Nominal Pressure:	1.0~2.5MPa
适用温度Suitable temperature:	0°C~80°C
适用介质Suitable Medium:	水 Water



DIF FERENTIAL PRESSURE BYPASS BALANCING VALVE

压差旁通平衡阀

产品型号Product Model:	800X
公称通径Nominal Diameter:	20~800mm
公称压力Nominal Pressure:	1.0~2.5MPa
适用温度Suitable temperature:	0°C~80°C
适用介质Suitable Medium:	水 Water

WATER METER VALVES

○给排水阀门水表类



VANE TYPE WATER METER

旋翼式水表

产品型号Product Model:	LXS
公称通径Nominal Diameter:	15-50mm
公称压力Nominal Pressure:	1.0~1.6MPa
适用温度Suitable temperature:	0°C~50°C
适用介质Suitable Medium:	水 Water



NB IOT WATER METER

NB 物联网水表

产品型号Product Model:	NB-IOT
公称通径Nominal Diameter:	15-400mm
公称压力Nominal Pressure:	1.0~2.5MPa
适用温度Suitable temperature:	0~80°C
适用介质Suitable Medium:	水 Water



VANE TYPE WATER METER

螺翼式水表

产品型号Product Model:	LXL
公称通径Nominal Diameter:	50-400mm
公称压力Nominal Pressure:	1.0~1.6MPa
适用温度Suitable temperature:	0°C~50°C
适用介质Suitable Medium:	水 Water



IC CARD WATER METER

IC卡水表

产品型号Product Model:	LXSK
公称通径Nominal Diameter:	15-150mm
公称压力Nominal Pressure:	1.0~1.6MPa
适用温度Suitable temperature:	0°C~50°C
适用介质Suitable Medium:	水 Water



VERTICAL TYPE WATER METER

垂直式水表

产品型号Product Model:	WS
公称通径Nominal Diameter:	50~1200mm
公称压力Nominal Pressure:	1.0~1.6MPa
适用温度Suitable temperature:	0°C~50°C
适用介质Suitable Medium:	水 Water



ULTRASONIC WATER METER

电磁水表

产品型号Product Model:	LXE
公称通径Nominal Diameter:	40-300mm
公称压力Nominal Pressure:	1.0~1.6MPa
适用温度Suitable temperature:	0°C~80°C
适用介质Suitable Medium:	水 Water



PHOTOELECTRIC REMOTE TRANSMISSION WATER METER

光电远传水表

产品型号Product Model:	LXSY
公称通径Nominal Diameter:	15-50mm
公称压力Nominal Pressure:	1.0~1.6MPa
适用温度Suitable temperature:	0°C~50°C
适用介质Suitable Medium:	水 Water



ULTRASONIC WATER METER

超声波水表

产品型号Product Model:	LXC
公称通径Nominal Diameter:	50-200mm
公称压力Nominal Pressure:	1.0~1.6MPa
适用温度Suitable temperature:	0°C~50°C
适用介质Suitable Medium:	水 Water

WATER VALVES

○给排水阀门类



ANTI-POLLUTION ISOLATING VALVE

防污隔断阀

产品型号Product Model:	HS41X
公称通径Nominal Diameter:	50~600mm
公称压力Nominal Pressure:	1.0~2.5MPa
适用温度Suitable temperature:	0°C~80°C
适用介质Suitable Medium:	水 Water



SILENCING CHECK VALVE

消声止回阀

产品型号Product Model:	H41X
公称通径Nominal Diameter:	40~600mm
公称压力Nominal Pressure:	1.0~1.6MPa
适用温度Suitable temperature:	0°C~80°C
适用介质Suitable Medium:	水 Water



MUTE TYPE CHECK VALVE

静音式止回阀

产品型号Product Model:	DRVZ
公称通径Nominal Diameter:	32~350mm
公称压力Nominal Pressure:	1.0~2.5MPa
适用温度Suitable temperature:	0°C~80°C
适用介质Suitable Medium:	水 Water



RUBBER DISC CHECK VALVES

橡胶瓣止回阀

产品型号Product Model:	SFVC
公称通径Nominal Diameter:	50~700mm
公称压力Nominal Pressure:	1.0MPa
适用温度Suitable temperature:	0°C~80°C
适用介质Suitable Medium:	水、污水 Water, sewage



SILENCING SLOWLY-CLOSING CHECK VALVE

消声缓闭止回阀

产品型号Product Model:	HH49X
公称通径Nominal Diameter:	40~1200mm
公称压力Nominal Pressure:	1.0~2.5MPa
适用温度Suitable temperature:	0°C~80°C
适用介质Suitable Medium:	水、污水 water, sewage



MULTI-FUNCTION CONTROL VALVES TRIPLE CHECK VALVE

多功能控制阀三合一止回阀

产品型号Product Model:	JLH
公称通径Nominal Diameter:	40~400mm
公称压力Nominal Pressure:	1.0~2.5MPa
适用温度Suitable temperature:	0°C~80°C
适用介质Suitable Medium:	水、污水 Water, sewage



DIGITAL LOCK BALANCING VALVE

数字锁定平衡阀

产品型号Product Model:	SP45F
公称通径Nominal Diameter:	15~350mm
公称压力Nominal Pressure:	1.0~1.6MPa
适用温度Suitable temperature:	-29°C~150°C
适用介质Suitable Medium:	水 Water



SELF-RELIANCE TYPE BALANCING VALVE

自力式平衡阀

产品型号Product Model:	ZLF
公称通径Nominal Diameter:	15~350mm
公称压力Nominal Pressure:	1.0~2.5MPa
适用温度Suitable temperature:	-29°C~150°C
适用介质Suitable Medium:	水 Water

WATER VALVES

○给排水阀门类



SELF-RELIANCE TYPE DIFFERENTIAL PRESSURE CONTROL VALVES

自力式压差控制阀

产品型号Product Model:	ZYC
公称通径Nominal Diameter:	15~600mm
公称压力Nominal Pressure:	1.6~6.4MPa
适用温度Suitable temperature:	0°C~100°C
适用介质Suitable Medium:	水 Water



SELF-RELIANCE TYPE BALANCING VALVE

自力式平衡阀

产品型号Product Model:	ZL47F
公称通径Nominal Diameter:	32~350mm
公称压力Nominal Pressure:	0.6~1.0MPa
适用温度Suitable temperature:	0°C~80°C
适用介质Suitable Medium:	水 Water



RISING STEAM GATE VALVES

明杆弹性座封闸阀

产品型号Product Model:	RRHX
公称通径Nominal Diameter:	50~1000mm
公称压力Nominal Pressure:	0.6~1.6MPa
适用温度Suitable temperature:	0°C~80°C
适用介质Suitable Medium:	水、污水 water, sewage



FIRE SOFT SEAL GATE VALVES

消防软密封闸阀

产品型号Product Model:	RRHS
公称通径Nominal Diameter:	50~1000mm
公称压力Nominal Pressure:	1.0~1.6MPa
适用温度Suitable temperature:	0°C~80°C
适用介质Suitable Medium:	水 Water



NON RISING STEM GATE VALVES

暗杆弹性座封闸阀

产品型号Product Model:	RVHX
公称通径Nominal Diameter:	50~1000mm
公称压力Nominal Pressure:	0.6~1.6MPa
适用温度Suitable temperature:	0°C~80°C
适用介质Suitable Medium:	水、污水 water, sewage



RUBBER JOINT

橡胶接头

产品型号Product Model:	JGD
公称通径Nominal Diameter:	40~600mm
公称压力Nominal Pressure:	1.0~2.5MPa
适用温度Suitable temperature:	0°C~80°C
适用介质Suitable Medium:	水、空气、油 Water, Air and oil



SCALING WARE

伸缩器

产品型号Product Model:	VSSJA
公称通径Nominal Diameter:	40~2000mm
公称压力Nominal Pressure:	1.0~1.6MPa
适用温度Suitable temperature:	≤80°C
适用介质Suitable Medium:	水 Wate



STAINLESS STEEL METAL COMPENSATOR

不锈钢金属补偿器

产品型号Product Model:	ZYC
公称通径Nominal Diameter:	25~500mm
公称压力Nominal Pressure:	1.0~1.6MPa
适用温度Suitable temperature:	0°C~80°C
适用介质Suitable Medium:	水、蒸汽、油 Water, steam, oil

WATER VALVES

○ 给排水阀门类



WAFER-TYPE SOFT-SEALED CENTERLINE BUTTERFLY VALVE

对夹式软密封中线蝶阀

产品型号Product Model:	D71X
公称通径Nominal Diameter:	50~1000mm
公称压力Nominal Pressure:	0.6~1.6MPa
适用温度Suitable temperature:	0°C~80°C
适用介质Suitable Medium:	水、污水 water, sewage



FLANGED RUBBER FULLY LINED BUTTERFLY VALVE

法兰式橡胶全衬蝶阀

产品型号Product Model:	D341X
公称通径Nominal Diameter:	50~1600mm
公称压力Nominal Pressure:	0.6~1.6MPa
适用温度Suitable temperature:	0°C~80°C
适用介质Suitable Medium:	水、污水 water, sewage



SOFT-SEALED FLANGED BUTTERFLY VALVE FOR PIPE NETWORK

软密封管网法兰蝶阀

产品型号Product Model:	GD341X
公称通径Nominal Diameter:	50~800mm
公称压力Nominal Pressure:	0.6~1.6MPa
适用温度Suitable temperature:	0°C~80°C
适用介质Suitable Medium:	水、污水 water, sewage



LIVE JOINT NEEDLE TYPE GLOBE VALVE

软密封双偏心双向承压蝶阀

产品型号Product Model:	D342X
公称通径Nominal Diameter:	50~4000mm
公称压力Nominal Pressure:	0.6~1.6MPa
适用温度Suitable temperature:	0°C~80°C
适用介质Suitable Medium:	水、污水 water, sewage



DOUBLE ECCENTRIC SOFT-SEALED FLANGE TELESCOPIC BUTTERFLY VALVE

双偏心软密封法兰伸缩蝶阀

产品型号Product Model:	SD342X
公称通径Nominal Diameter:	50~3000mm
公称压力Nominal Pressure:	0.6~1.6MPa
适用温度Suitable temperature:	0°C~80°C
适用介质Suitable Medium:	水、污水 water, sewage



WAFER FIRE SIGNAL BUTTERFLY VALVE

对夹消防信号蝶阀

产品型号Product Model:	ZSXF-D(C)
公称通径Nominal Diameter:	40~250mm
公称压力Nominal Pressure:	1.6MPa
适用温度Suitable temperature:	-10°C~80°C
适用介质Suitable Medium:	水 water



GROOVED FIRE BUTTERFLY VALVE

沟槽消防蝶阀

产品型号Product Model:	ZSDF(3G)
公称通径Nominal Diameter:	40~300mm
公称压力Nominal Pressure:	1.6MPa
适用温度Suitable temperature:	-10°C~80°C
适用介质Suitable Medium:	水 water



GROOVED SIGNAL BUTTERFLY VALVE

沟槽信号蝶阀

产品型号Product Model:	ZSXF-D(G)
公称通径Nominal Diameter:	40~300mm
公称压力Nominal Pressure:	1.6MPa
适用温度Suitable temperature:	-10°C~80°C
适用介质Suitable Medium:	水 water

SANITARY VALVE SERIES

○ 卫生级阀门系列



SANITARY VALVES

○ 卫生级阀门类



SANITARY FAST LOADING BUTTERFLY VALVE

卫生级快装蝶阀

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"



SANITARY OF BUTTERFLY VALVES

卫生级对夹蝶阀

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"



SANITARY THREAD TYPE BUTTERFLY VALVE

卫生级螺纹式蝶阀

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"



SANITARY WELDING TYPE BUTTERFLY VALVE

卫生级焊接蝶阀

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"



END FLANGE/END THREAD BUTTEFLY VALVE

一端法兰/一端螺纹蝶阀

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"



SANITARY THREE PCS BUTTERFLY VALVE

卫生级三片式蝶阀

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"



SANITARY THREE PCS BUTTERFLY VALVE

卫生级三片式蝶阀

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"



SANITARY DEPENDS ON THE SURFACE LIVE BY LIGHT

卫生级活接视灯

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN50-150

SANITARY VALVES

○ 卫生级阀门类



SANITARY FAST LOADING TYPE BALL VALVE

卫生级快装球阀

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"



SANITARY WITHOUT RETENTION FLUID BALL VALVE

卫生级不无滞留液球阀

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"



SANITARY 3 WAY TYPE BALL VALVE

卫生级三通螺纹式球阀

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"



SANITARY FAST LOADING STONE

卫生级快装四通

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"



SANITARY FAST LOADING DIAPHRAGM VALVE

卫生级快装隔膜阀

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN10-50及3/4"-2"



SANITARY LEVEL 3 WAY FAST LOADING

卫生级快装三通

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"



SANITARY WELDING TEE

卫生级焊接三通

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"



SANITARY U FAST LOADING TEE

卫生级U型快装三通

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"

SANITARY VALVES

○ 卫生级阀门类

SANITARY FAST LOADING ELBOW



卫生级快装弯头

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"

SANITARY WELDING ELBOW



卫生级焊接弯头

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"

SANITARY WELDING ELBOW



卫生级焊接弯头

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"

SANITARY WELDING SIZE HEAD



卫生级焊接大小头

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"

SANITARY FAST LOADING SIZE HEAD



卫生级快装大小头

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"

SANITARY FAST LOADING PIGUAN CONNECTOR



卫生级快装皮管接头

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"

SANITARY LIVE JOINT



卫生级活接头

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"

SANITARY U FAST LOADING TEE



IDF卫生级活接头

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"

SANITARY VALVES

○ 卫生级阀门类

SANITARY CARD HOOP FAST LOADING CONNECTOR



卫生级卡箍快装接头

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"

SANITARY STAINLESS STEEL PIPE SIGHT GLASS



卫生级不锈钢管道视镜

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"

SANITARY WELDING THROUGH SIGHT GLASS



卫生级焊接直通视镜

主体材质Material: SUS304、SUS316L

SANITARY SIGHT GLASS



卫生级视镜

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"

SANITARY FAST LOADING CHECK VALVE



卫生级快装式止回阀

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"

SANITARY WELDING TYPE CHECK VALVE



卫生级焊接式止回阀

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"

SANITARY GARAD THREE-PIECE BUTT-CLAMPED CHECK VALVE



卫生级三段对夹式止回阀

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"

STAINLESS STEEL PIPE BRACKET



不锈钢管支架

主体材质Material: SUS304、SUS316L
管道通径Pipe size: DN25-150及1"-6"

ACCESSORY SERIES

○ 配件系列



FLANGES

○ 法兰类

WITH NECK BUTT WELD ENDS FLANGES

带颈对焊法兰



公称通径Nominal Diameter: 15~1600mm
公称压力Nominal Pressure: 2.0~42.0MPa
产品材质Product material:
304、304L、321、316、316L、碳钢、高温钢
Needle type valve series

STAINLESS STEEL BUTTERFLY VALVE FLANGE

蝶阀专用法兰



公称通径Nominal Diameter: 10~2000mm
公称压力Nominal Pressure: 0.25~16.0MPa
产品材质Product material:
304、304L、321、316、316L、碳钢、高温钢、Q235
Needle type valve series

FLAT PLATE WELDING FLANGES

板式平焊法兰



公称通径Nominal Diameter: 10~2000mm
公称压力Nominal Pressure: 0.25~42.0MPa
产品材质Product material:
304、304L、321、316、316L、碳钢、高温钢
Needle type valve series

LOOSE SETS OF FLAT WELDING FLANGES(ACTIVITIES FLANGE)

松套平焊法兰 (活动法兰)



公称通径Nominal Diameter: 10~2000mm
公称压力Nominal Pressure: 0.25~42.0MPa
产品材质Product material:
Q235、16MN、15CRMO、1CR18Ni9Ti、304、304L、316、316L

ANSI STANDARD WITH NECK BUTT WELD ENDS FLANGES

美标带颈对焊法兰



公称通径Nominal Diameter: 10~2000mm
公称压力Nominal Pressure: 10~2500Lb
产品材质Product material:
304、304L、321、316、316L、碳钢、高温钢
Needle type valve series

ANSI STANDARD WITH NECK FLAT WELDING FLANGES

美标带颈平焊法兰



公称通径Nominal Diameter: 10~2000mm
公称压力Nominal Pressure: 0.25~42.0MPa
产品材质Product material:
304、304L、321、316、316L

FLANGE COVER

法兰盖



公称通径Nominal Diameter: 10~2000mm
公称压力Nominal Pressure: 0.25~42.0MPa
产品材质Product material:
304、304L、321、316、316L、碳钢、高温钢
(Needle type valve series)

LOOSE SET OF FLANGING FLANGE (ATIVITIES FLANGE)

松套翻边管法兰 (活动法兰)



公称通径Nominal Diameter: 10~2000mm
公称压力Nominal Pressure: 0.25~42.0MPa
产品材质Product material:
304、304L、321、316、316L、碳钢、高温钢
(Needle type valve series)

PIPES

○管件类



STAINLESS STEEL LONG RADIUS ELB90LR ELBOW

不锈钢长半径弯头ELB90LR

执行标准 Implement Standard:
ASME/ANSI B16.9
GB/T12459 GB/T13401
SH3408-96 SH3409-96
产品材质Material: 304、304L、316L、321、347
通径大小Doameter range: 1/2"-48"



STAINLESS STEEL LONG RADIUS ELB45LR ELBOW

不锈钢长半径弯头ELB45LR

执行标准 Implement Standard:
ASME/ANSI B16.9
GB/T12459 GB/T13401
SH3408-96 SH3409-96
产品材质Material: 304、304L、316L、321、347
通径大小Doameter range: 1/2"-48"



STAINLESS STEEL SHORT RADIUS ELB90SR ELBOW

不锈钢短半径弯头ELB90SR

执行标准 Implement Standard:
ASME/ANSI B16.28
GB/T12459 GB/T13401
SH3408-96 SH3409-96
产品材质Material: 304、304L、316L、321、347
通径大小Doameter range: 1/2"-48"



STAINLESS STEEL SUCH AS TRACK TEE

不锈钢等径三通TEE

执行标准 Implement Standard:
ASME/ANSI B16.9
GB/T12459 GB/T13401
SH3408-96 SH3409-96
产品材质Material: 304、304L、316L、321、347
通径大小Doameter range: 1/2"-48"



STAINLESS STEEL FLANGING SHORT

不锈钢翻边短

执行标准 Implement Standard:
MSS SP-43 ASME/ANSI B16.9
GB/T12459(短型Saori)(长型Long)
产品材质Material: 304、304L、316L、321、347
通径大小Doameter range: 1/2"-36"



STAINLESS STEEL SEALING HEAD

不锈钢封头

执行标准 Implement Standard:
ASME/ANSI B16.9
GB/T12459 GB/T13401
SH3408-96 SH3409-96
产品材质Material: 304、304L、316L、321、347
通径大小Doameter range: 1/2"-48"



STAINLESS STEEL CONCENTRIC DIFFERENT-DIAMETER PIPE RED CON

不锈钢同心异径管 RED CON

执行标准 Implement Standard:
ASME/ANSI B16.9
GB/T12459 GB/T13401
SH3408-96 SH3409-96
产品材质Material: 304、304L、316L、321、347
通径大小Doameter range: 1/2"-48"



STAINLESS STEEL ECCENTRIC DIFFERENT-DIAMETER PIPE RED ECC

不锈钢偏心异径管 RED ECO

执行标准 Implement Standard:
ASME/ANSI B16.9
GB/T12459 GB/T13401
SH3408-96 SH3409-96
产品材质Material: 304、304L、316L、321、347
通径大小Doameter range: 1/2"-48"

FLOW METER / LEVEL GAUGE / FLOAT LEVEL ONTROLLER

○流量计/液位计/液位控制器



VORTEX FLOW METER

涡街流量计

产品型号Product Model: XKLV
公称通径Nominal Diameter: 20~2000mm
适用介质Suitable Medium:
气体、液体、蒸汽
Gas、Liquid and steam



LIQUID TURBINE FLOW METER

液体涡轮流量计

产品型号Product Model: LWGY
公称通径Nominal Diameter: 100~2000mm
公称压力Nominal Pressure: 1.6~25MPa
适用温度Suitable Temperature: -20°C~50°C
适用介质Suitable Medium:
气体、液体、蒸汽
Gas、Liquid and steam



TURN PILLAR TYPE MAGNETIC FLOAT LEVEL GAUGE

翻柱式磁性浮子液位计

产品型号Product Model: UHZ-52
公称通径Nominal Diameter: 10~16mm
公称压力Nominal Pressure: ≤4.0MPa
适用温度Suitable Temperature: -20°C~250°C



CLEAR QUARTZ TUBE LEVEL GAUGE

透明石英管液位计

产品型号Product Model: UNS-A-B
公称通径Nominal Diameter: 20~40mm
公称压力Nominal Pressure: 1.6~6.3MPa
适用温度Suitable Temperature: -50°C~520°C



QUARTZ TUBE TYPE DOUBLE COLOR WATER TABLE

石英管式双色水位表

产品型号Product Model: SF303、304
公称压力Nominal Pressure: 0.1~42MPa
适用温度Suitable Temperature: -160°C~530°C



LEVEL GAUGE GLASS TUBE

玻璃管液位计

产品型号Product Model: X49W
公称通径Nominal Diameter: 20mm
公称压力Nominal Pressure: 1.6MPa
适用介质Suitable Medium:
Q235-A(碳钢 Carbon steel)
1Cr18Ni9Ti(不锈钢 Stainless steel)
适用温度Suitable Temperature: ≤150°C



FLOAT LEVEL CONTROLLER

浮球液位控制器

产品型号Product Model: UQK-2
公称压力Nominal Pressure: ≤1MPa
适用温度Suitable Temperature: ≤180°C



FLOAT LIQUID CONTROLLER

浮球液控制器

产品型号Product Model: BUQK
公称通径Nominal Diameter: 80mm
公称压力Nominal Pressure: 1.6~4.0MPa
适用介质Suitable Medium: ≥0.45g/cm3
适用温度Suitable Temperature: -40°C~180°C