

特征 Characteristic	1.高压电磁阀，先导膜片式结构，适用于空压机，注塑机 2.使用PTFE密封件 1. High pressure solenoid valve, pilot diaphragm structure, suitable for air compressor, injection molding machine 2. Use PEEK seals		
介质 Medium	热水，压缩空气，水，油等 Hot water, compressed air, water, oil, etc.		
流体温度 Temperature	-20℃~250℃		
压力 Pressure	0.1MPa~25.0MPa	0.1MPa~35.0MPa	2MPa~50.0MPa
连接尺寸 Port Size	1/4", 3/8", 1/2"		
连接方式 Port Thread	BSPP螺纹/NPT螺纹 BSPP, NPT		
通径(mm) Orifice	4, 5, 6, 7, 8		
电压 Voltage	DC-12V,24V AC-24V,120V,240V/60Hz,110V,220V/50Hz		
范围 Tolerance	±10%		
线圈 Coils	Y21B,18VA(AC),16W(DC),IP65,100%ED EX1620,20VA(AC),16W(DC),IP65,100%ED		
材料 Material	阀体 Body	不锈钢 Stainless Steel304	
	密封件 Seal	聚四氟乙烯/聚醚醚酮/不锈钢 PTFE,PEEK,Stainless Steel 304	
	隔磁管Armature Tube	不锈钢 Stainless Steel 304	
	动铁芯 Plunger	不锈钢 Stainless Steel 430F	
	静铁芯 Stop	不锈钢 SS 430F	
	弹簧 Springs	不锈钢 SS 304	
	分磁环Shading Rings	紫铜 Copper	



HKKB




Y21B



EX1620

型号编制方式 Determine Valve Body Code

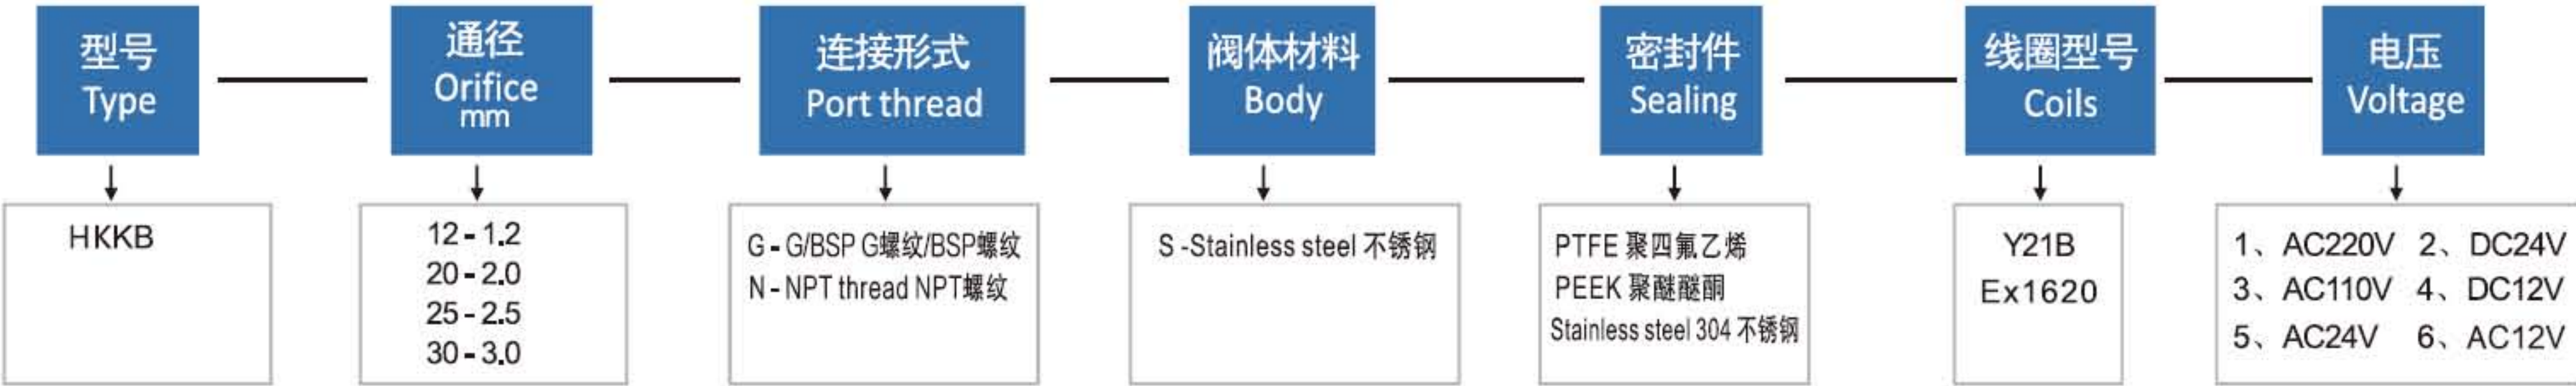

HKKB系列,常闭NC,S91B线圈（承压：250kg）
HKKB Series Normally Closed, Y21B Coil (Pressure Range:250bar)

Size	端口大小 Port Size	孔口大小 Orifice/MM	Cv	最小压力 Min Pressure	最大压力 Max Presuure		密封材料 Sealing Material	阀身材料 Body Material	线圈 Coils
					AC(22VA)	DC(17W)			
HKKB-XXX	1/4"	5	7	0.5MPa	25.0MPa	25.0MPa	聚四氟乙烯 PTFE 聚醚醚酮 PEEK Stainless steel 304 不锈钢	不锈钢 stainless steel	Y21B
HKKB-XXX	1/4" 3/8"	6	8	0.5MPa	20.0MPa	20.0MPa			Y21B
HKKB-XXX	1/4" 3/8"	7	8	0.5MPa	15.0MPa	15.0MPa			Y21B
HKKB-XXX	3/8" 1/2"	7	8	0.5MPa	10.0MPa	10.0MPa			Y21B

HKKB系列电磁阀尺寸图（承压：250kg）
Size Drawing For HKKB Series Solenoid Valve (Pressure Range:250bar)

Size	A	C
HKKB-1/8"	50	138
HKKB-1/4"	50	138
HKKB-3/8"	57	138
HKKB-1/2"	57	148

